



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.98 ohms max.
D.C. RESISTANCE	4-5 @20°C	1.20 ohms max.
D.C. RESISTANCE	6-9 @20°C	0.24 ohms max.
⑥B INDUCTANCE	1-2 10kHz, 200mVAC, Ls	1.08mH ±10%
INDUCTANCE	1-2 10kHz, 200mVAC, 1.6ADC, Ls	800uH min.
DIELECTRIC	1-9 tie(3+4),4000VAC, 1 second	-
DIELECTRIC	1-5 1800VAC, 1 second	-
TURNS RATIO	(1-2):(4-5)	2.023:1, ±2%
TURNS RATIO	(1-2):(6-9)	4.047:1, ±2%

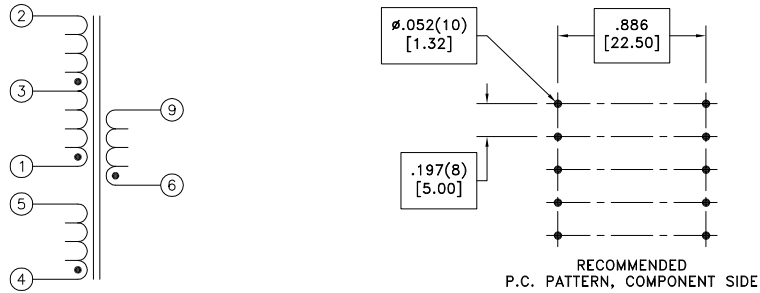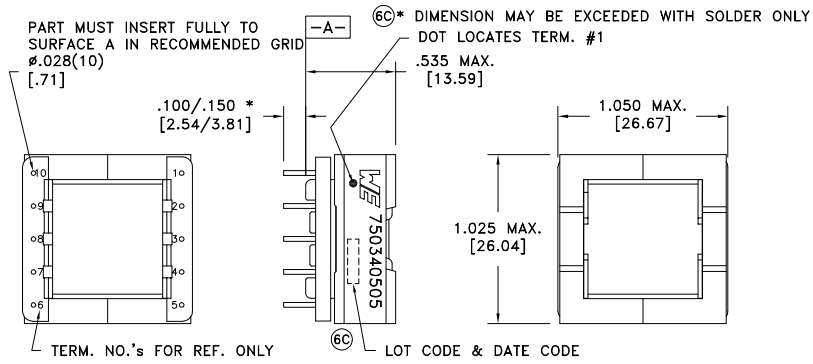

⑥C Wire insulation & RoHS status not affected by wire color.  
 Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-0029 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$	Decimals: $\pm .005$ [.13] Footprint: $\pm .001$ [.03]	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. <b>750340505</b>
6C	11/15			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		eiSos p/n: 750340505	
6B	7/11			SPECIFICATION SHEET 1 OF 1			
6A	8/09	SEE REVISION SHEET FOR REVISION LEVEL					