



UNIT:mm

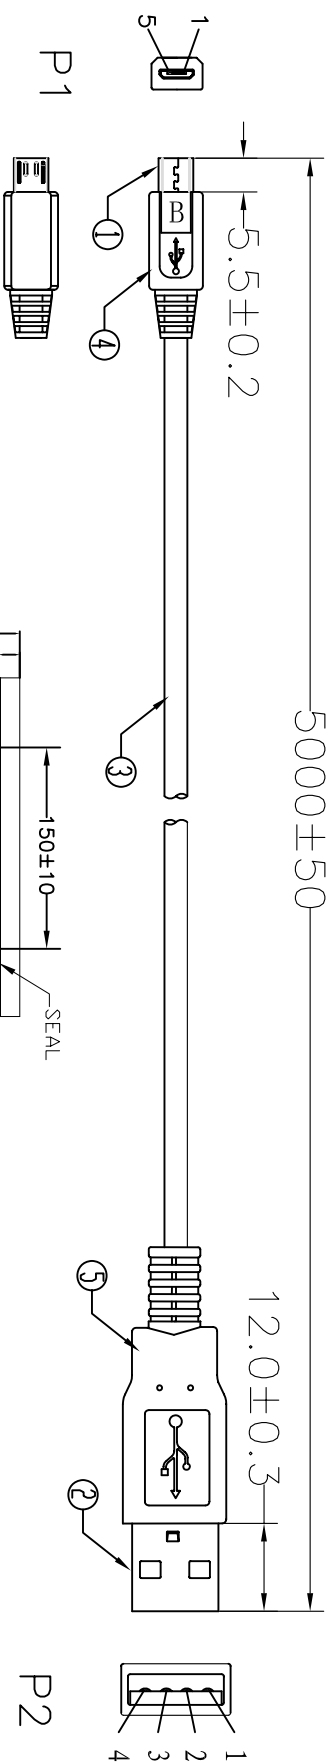

PIN ASSIGNMENT	
P1	P2
1	1
2	2
3	3
4	4
5	5
SHELL	SHELL

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

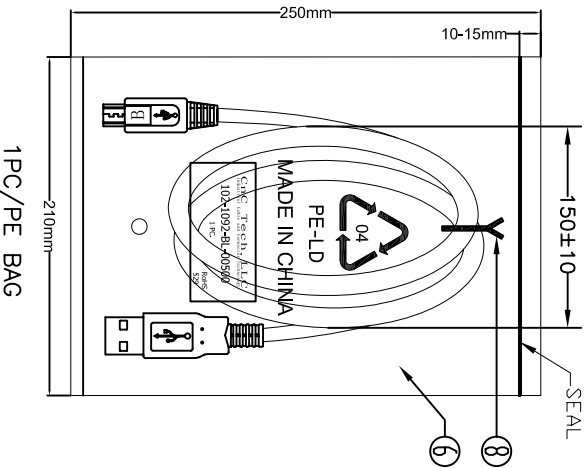

⑧	TIE	1	BLACK L=120mm
⑦	PE BAG	1/5	CLEAR SIZE: 330*380*0.05mm PRINT BLACK"MADE IN CHINA"+"5PCS"及印生产日期,有透气孔.
⑥	PE BAG	1	CLEAR SIZE: 210*250*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"及印生产日期,有透气孔.
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO. WM-40)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO. WM-116)
③	CABLE	1	USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC) JACKET:BLACK OD:3.5mm L=5000±15mm
②	CONN	1set	USB A MALE SHELL:NICKEL PIN:G/F 3PCS TYPE INSULATOR COLOR:WHITE
①	CONN	1	MICRO USB 5P B/M SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK

<b>CNC Tech, LLC</b>			
Industrial Cable and Connector Technology			
DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	102-1092-BL-00500
DECIDED		DATE	2012-02-17
VERSIONS/EDITION	A/0	PROJECTION	

4

3

2

1

A

B

C

D

A

B

C

D