



DIMENSIONS:	
A	4.050" ±0.063
B	3.436" ±0.125
C	3.500" ±0.063
D	3.500" ±0.063
E	2.300" ±0.063
F	2.844" ±0.063
G	0.187" x 0.300" ±0.015

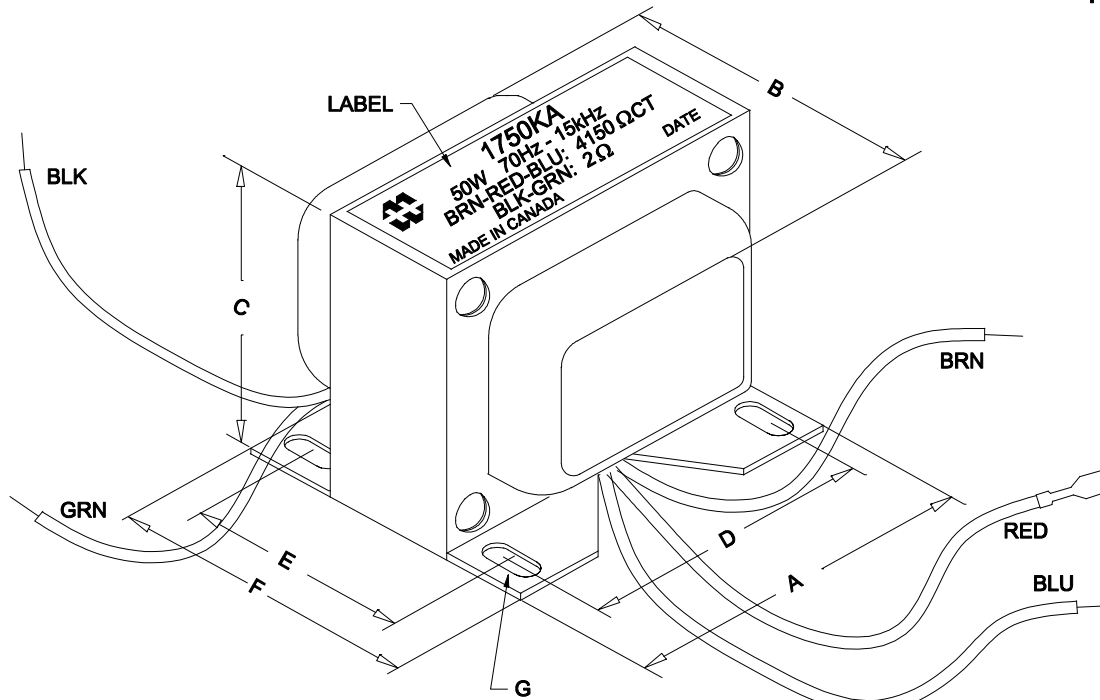

NOTE: ALL LEADS 12.0" OUT MIN.

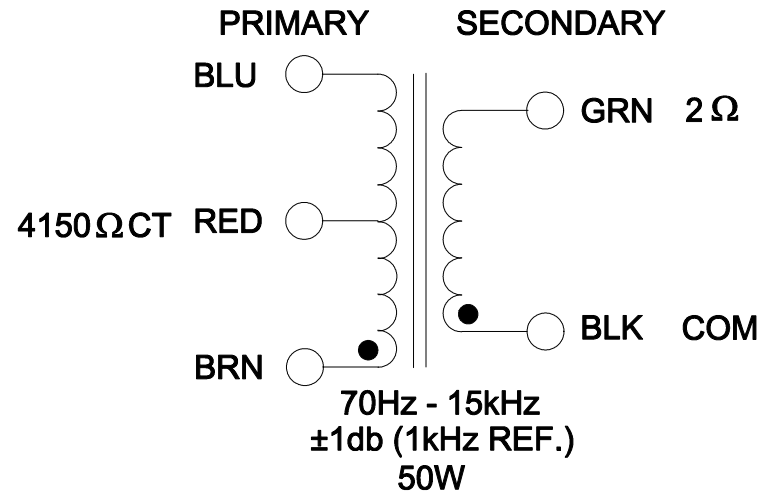

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 240V, 60Hz, BRN - BLU	3.4mA Max.
Sec. N.L.V	@ 240V, 60Hz, BRN - BLU	
	BRN - RED = RED - BLU =	120.0V ±2%
	BLK - GRN =	5.355V ±2%
POLARITY	BRN, BLK	ADDITIVE
DCR	@ 20°C, BRN - RED =	45.53 Ω ±20%
	@ 20°C, RED - BLU =	49.09 Ω ±20%
	@ 20°C, BLK - GRN =	0.140 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE
0	RELEASED.	05/10/11

HAMMOND MANUFACTURING™ ELECTRONIC DIVISION
 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5
 PH # (519) 886-6181 FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: 1750KA	DWG. NO.
DATE: 05/10/11	APP'D. BY:	TRANSFORMER	1750KA
DIMENSIONS: IN(X) MM()			