

1

2

3


4

5




6

7

2000±50




P1

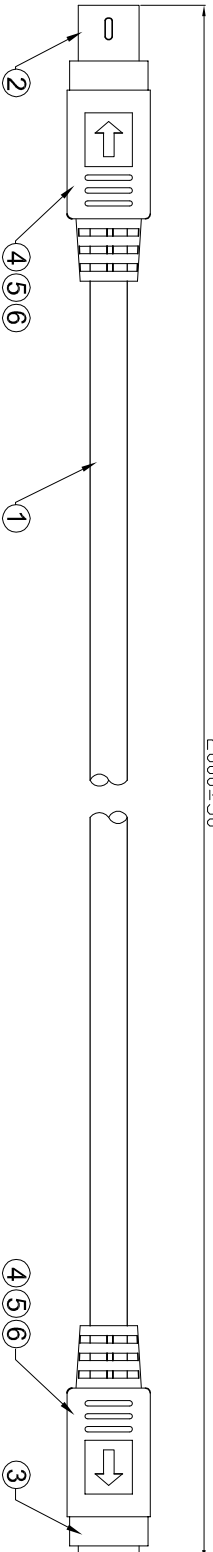

P2

PIN ASSIGNMENT

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
SHELL	D
	SHELL

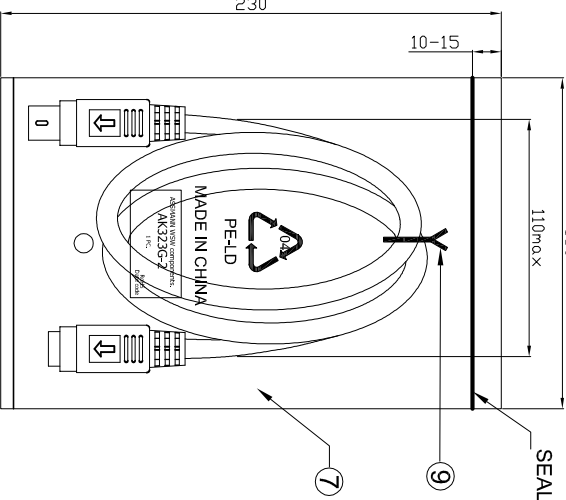

1PC/PE BAG

- Electrical test:
1. 100% short, open, miss wire test
 2. Conduct resistance: 2Ω max.
 3. Insulator resistance: 10MΩ min.
 4. Hi-Pot test: DC 300V/10ms

⑨	TIE	1	WHITE	L=100mm
⑧	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm	PRINT BLACK"MADE IN CHINA"+"10PCS"
⑦	PE BAG	1	CLEAR SIZE: 130*230*0.05mm	PRINT BLACK"MADE IN CHINA"+"1PC"
⑥	TUBE	2	HEAT SHRINK TUBE	BLACK ODO.6*7MM
⑤	IN JACKET	5.2g	CLEAR	LD-PE (Mould NO.:NM-65)
④	OUT JACKET	8.1g	PVC 40P	COLOR:BEIGE(V-29)(Mould NO. WM-149)
③	CONN	1	MINI DIN 6PIN	FEMALE SOLDER TYPE PIN INSULATOR COLOR:BLACK
②	CONN	1	MINI DIN 6PIN	MALE SOLDER TYPE PIN INSULATOR COLOR:BLACK
①	CABLE	1	NOUL 28AWG*6C+D+AL/MY	JACKET:BEIGE(V-29) ODS.0mm
No.	NAME	Q'Ty	SPECIFICATION	

ROHS compliant

Unit: mm

Scale	Free	Customer-No.	
TOLERANCE		Drawn	20.02.2017
		Approved	20.02.2017
DIM	TOL	ASSMANN WSW-No. AK323G-2	
		Drawing-No. ASS 7907 CA	
Angle	TOL	Replace Sheet	
		rev00	
Id.	①	Drawn	20.02.2017
Modification		Amy	
Date		ASSMANN	
Name		components	

1

2

3

4

5

6

7

H

G

E

D

C

B

A