


380 Push Button Snap Action Switches Up to 25(4)A 250Vac



15(4)A 250Vac T85

UL 15A, 1/2hp 125-250Vac 65°C,
UL file E91973, CSA file LR98589


Approvals apply to switch mechanism only
μ contact gap
Full rating details and technical data on pages 50 & 51
Ratings are at full plunger travel

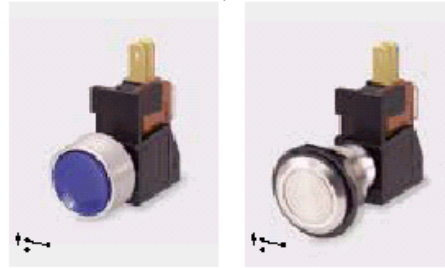

383 2510 K BL

383 2510 V

Blank for switch only										
E	R	Red	B	Black	BL	Blue	G	Green	W	White
P	R	Red	B	Black	BL	Blue	G	Green	W	White
K	R	Red	B	Black	BL	Blue	G	Green	W	White
R	R	Red	B	Black	BL	Blue	G	Green	W	White
M	R	Red	B	Black	BL	Blue	G	Green	W	White
V										Stainless steel

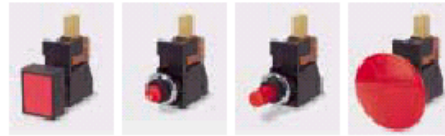

383 2510 R R

383 2510 P R

383 2510 E R

383 2510 B R

ORDER FORMAT

382 2510 K BL
 TERMINAL CODE FUNCTION CODE ACTUATOR CODE ACTUATOR COLOR

TERMINAL CODE	FUNCTION CODE	ACTUATOR CODE	BODY	OPTIONS
382 6.4 Solder	2510 12.5 6.3 x 0.8 ON - ON (momentary 1 side)	R Rectangular bezel B Large contact factory for details 	 Panel Cut-out (NA for V actuator) Panel thickness Both nuts 2.5mm No backnut 4.0mm	Color Call factory for custom colors A full range is available for large orders Cover M323 Available for "P" actuator only Switching mechanism All variants can also be fitted with the NEW Arcoelectric 340 series snap-action switches
383 12.5 6.3 x 0.8		E Long P Short K with satin chrome bezel M with nylon bezel V Vandal resist IP66 		
385 9.9 4.8 x 0.5		V Vandal resist IP66 	Panel Cut-out (for V actuator only) Panel thickness 8.0mm	

Dimensions (mm)

