
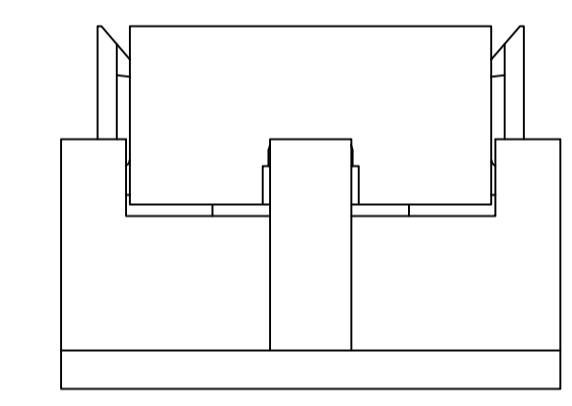


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DN	APVD		
H		REVISED PER 0638-0188-05	4/22/05	SS	GS		
H1		REVISED PER ECO-09-020935	11SEP09	KK	AEG		

NOTES:

- MATES WITH PLUG 207019-1.
- CIRCUITS 1 THRU 8 COMMONED, 9 THRU 16 COMMONED, 17 THRU 24 COMMONED, 25 THRU 32 COMMONED AND 33 THRU 36 COMMONED TOGETHER.
- ALL CURCUITS COMMONED TOGETHER.
- TIN-LEAD OVER NICKEL PER QQ-N-290 OR COPPER PER MIL-C-14550.
- 0.76 μ m (.000030) MIN GOLD PER MIL-G-45204 FOR A LENGTH OF 5.08 (.200) FROM MATING END, 3.81 μ m (.000150) MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 4.83 (.190) MIN. FROM OPPOSITE END, BOTH OVER 1.27 μ m (.000050) MIN NICKEL PER QQ-N-290.
- TIN OVER NICKEL PER QQ-N-290 OR COPPER PER MIL-C-14550.
- 0.76 μ m (.000030) MIN GOLD PER MIL-G-45204 FOR A LENGTH OF 5.08 (.200) FROM MATING END, 3.81 μ m (.000150) MIN TIN PER MIL-T-10727 FOR A LENGTH OF 4.83 (.190) MIN. FROM OPPOSITE END, BOTH OVER 1.27 μ m (.000050) MIN NICKEL PER QQ-N-290.
- OBSELETE PARTS: OBSELETE CIS STREAMLINING PER D.RENAUD/D.SINISI

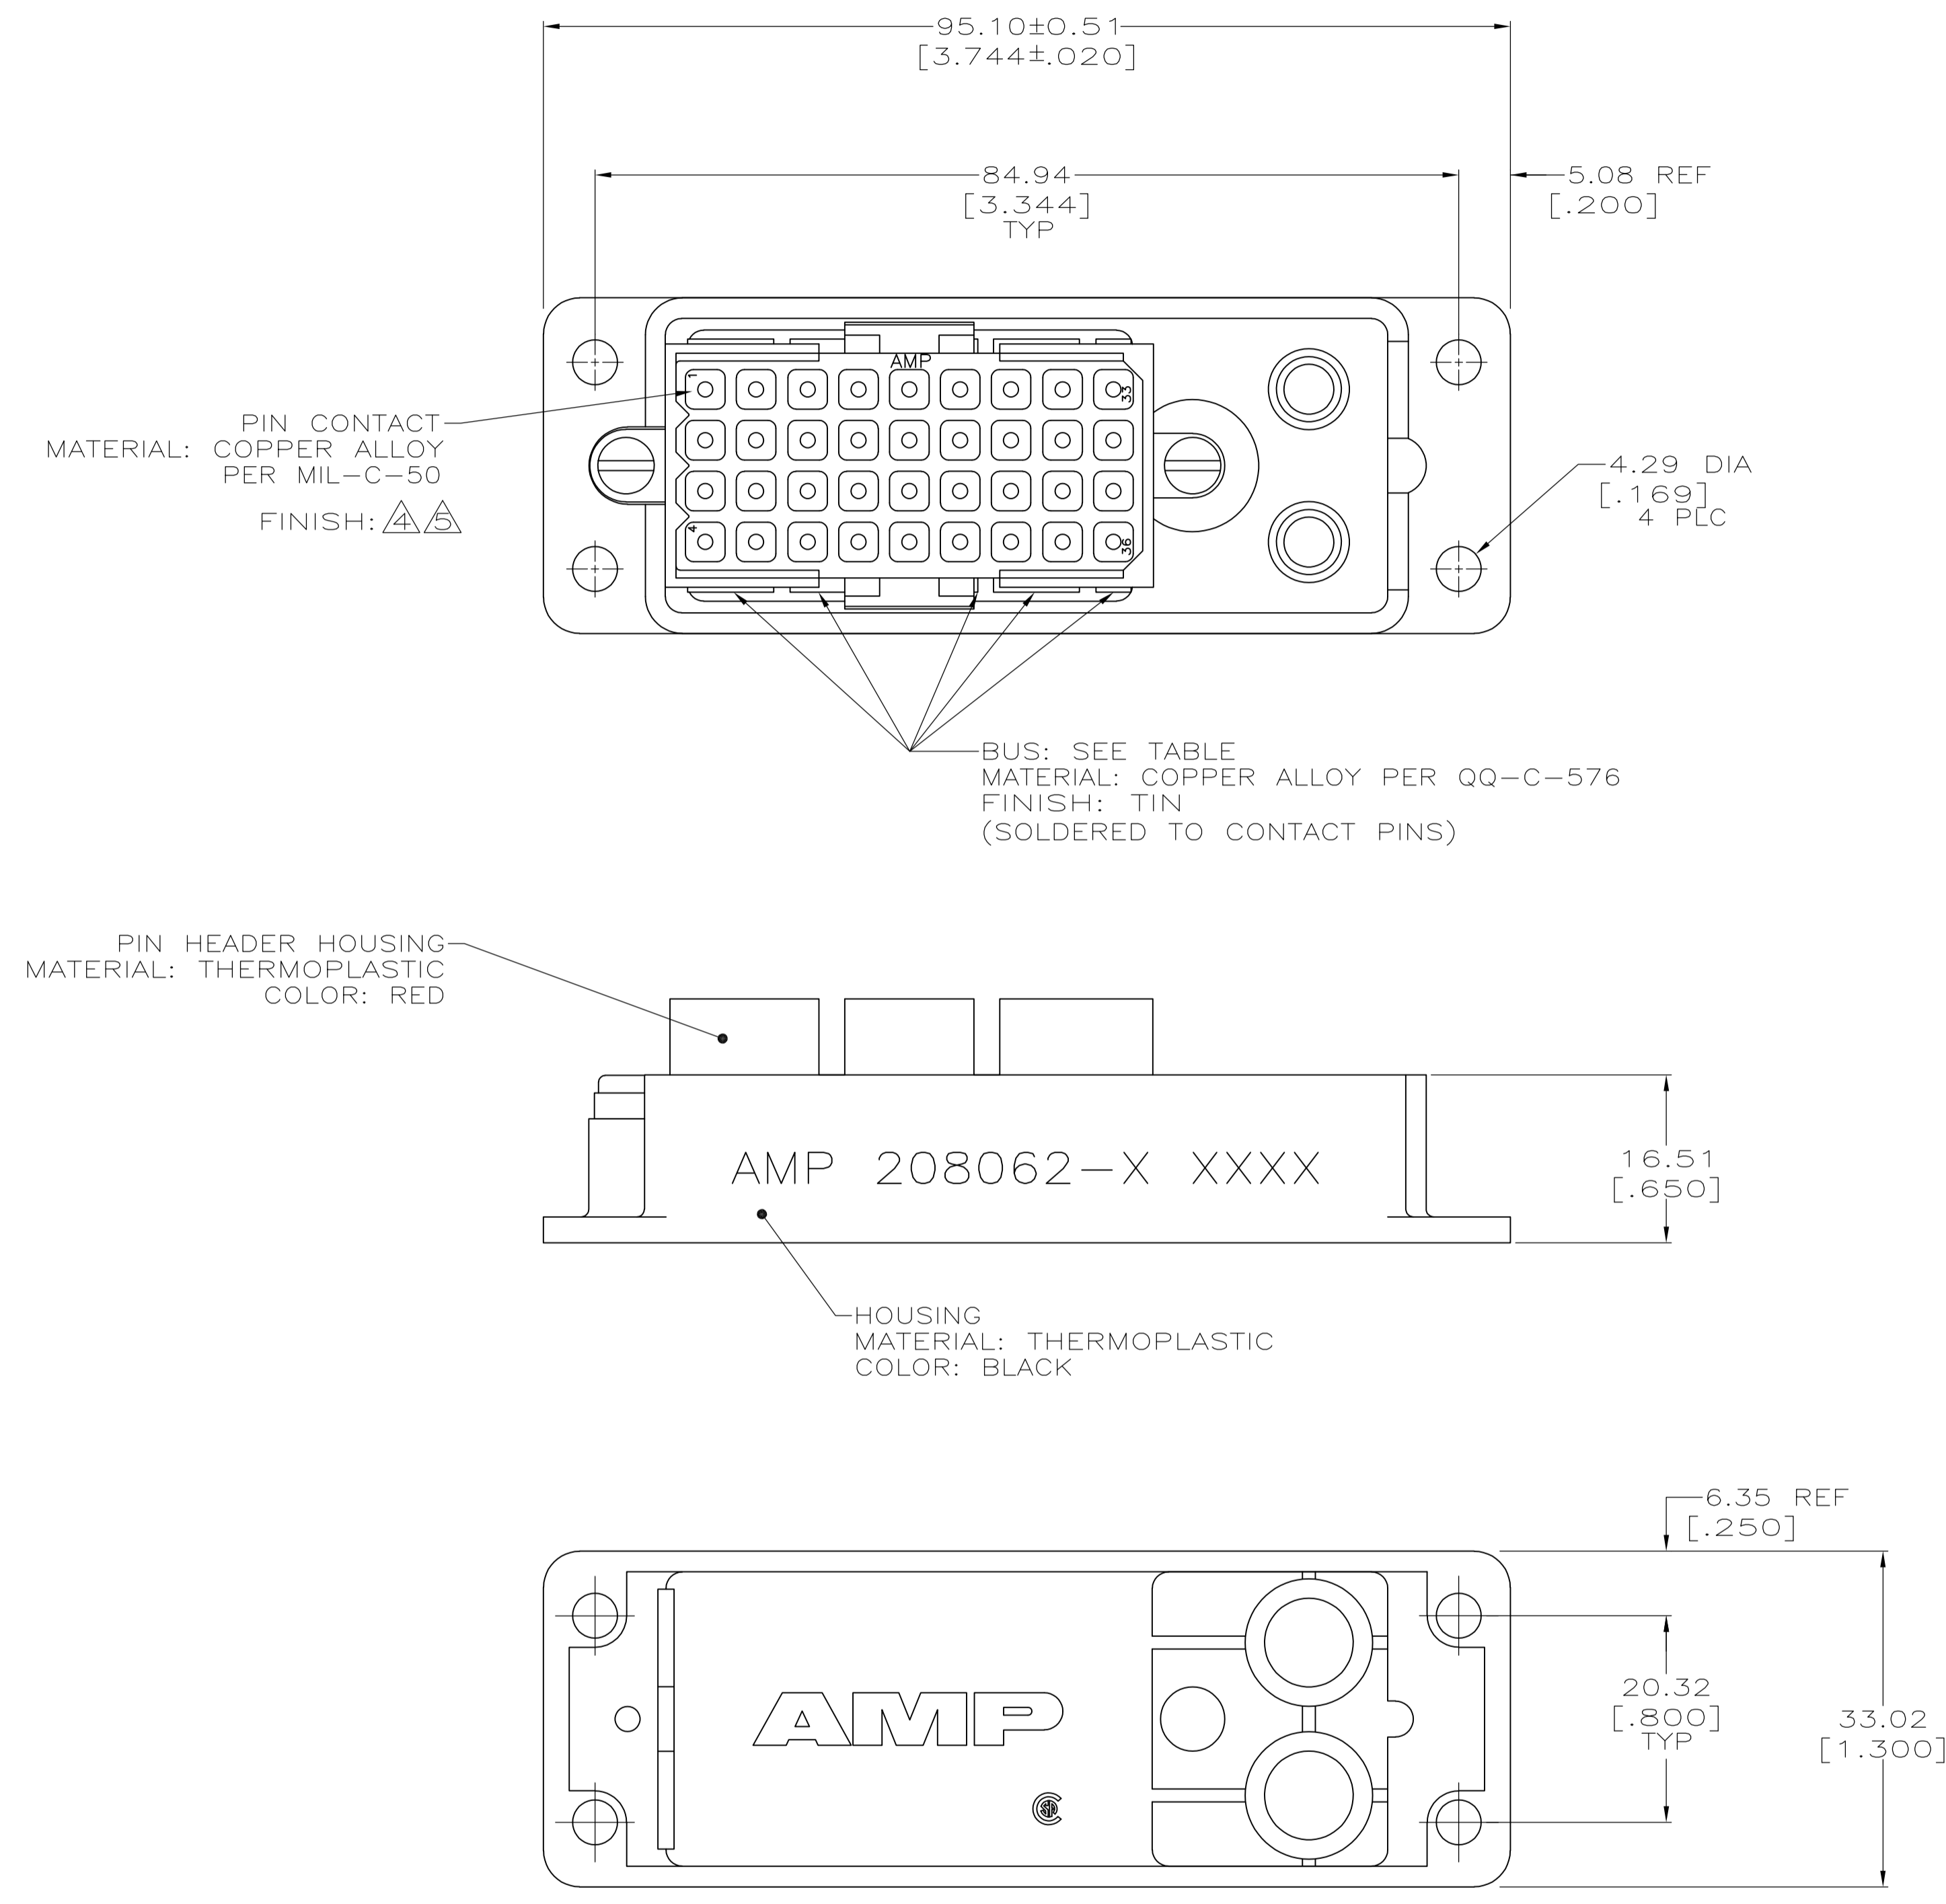

OBSELETE	FINISH	BUS TYPE	PART NO.
Δ	Δ	(1) 36 POSITION Δ	1-208062-1
Δ	Δ	(1) 4 POSN AND (4) 8 POSN Δ	1-208062-0
Δ	Δ	(1) 36 POSITION Δ	208062-9
Δ	Δ	(1) 4 POSN AND (4) 8 POSN Δ	208062-8
Δ	Δ	(1) 36 POSITION Δ	208062-7
Δ	Δ	(1) 4 POSN AND (4) 8 POSN Δ	208062-6
Δ	Δ	(1) 36 POSITION Δ	208062-3
Δ	Δ	(1) 4 POSN AND (4) 8 POSN Δ	208062-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN D.GELTZ 08/13/92	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
0 PLC ± -	1 PLC ± -	CHK R.STONE 9-21-92	NAME
2 PLC ± 0.25[.010]	3 PLC ± -	APVD	PRODUCT SPEC
4 PLC ± -	ANGLES ± -		APPLICATION SPEC
MATERIAL SEE CALLOUTS	FINISH SEE CALLOUTS	SIZE CAGE CODE DRAWING NO	RESTRICTED TO
		A1 00779 C=208062	
		CUSTOMER DRAWING	SCALE 2:1 SHEET 1 OF 1 REV H1