

APPLICATION SPECIFICATION

1. SCOPE

This specification covers the requirements for application of AMP* PN 62382 thru splices. These requirements are applicable to automatic machine crimping tools. For specific wire and insulation ranges relative to the products covered in this specification, see Figure 5.

2. NOMENCLATURE

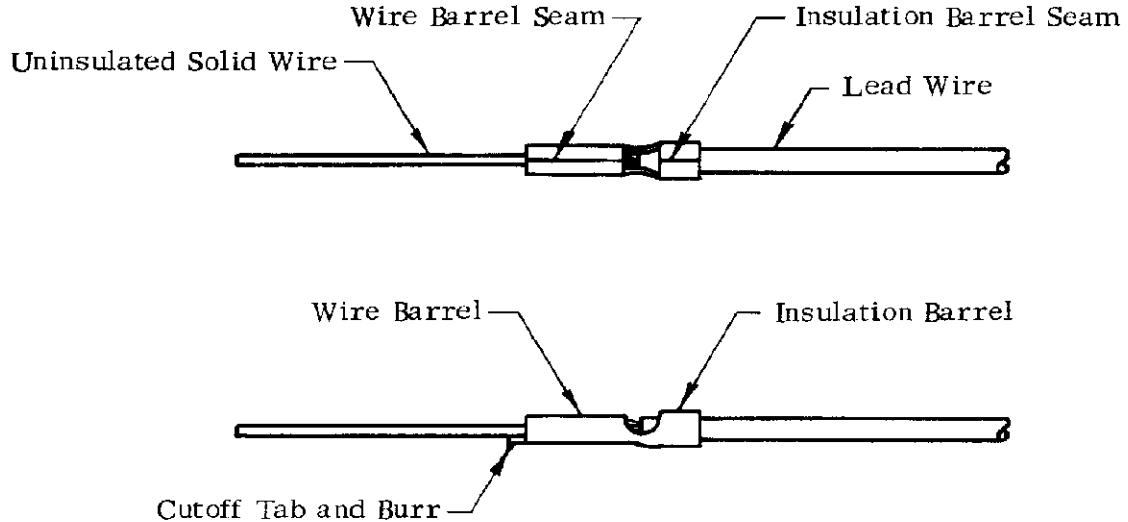


Figure 1

3. CRIMP AND DIMENSIONAL REQUIREMENTS

3.1. Wire Preparation

A. Strip Length

Insulation shall be stripped as indicated in Figure 5.

B. Workmanship

Reasonable care shall be taken not to nick, scrape or cut any strands or the solid wire during the stripping operation.

* Trademark of AMP Incorporated.

© COPYRIGHT 1975, 76 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP INCORPORATED PRODUCTS COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

NO 114-2013

				DR <i>P. C. Taff</i> 8-13-75 CHK <i>Valerie E. Hoff</i> 8-13-75 APP <i>W. J. ...</i> 8-21-75 NAME	AMP INCORPORATED Harrisburg, Pa.				
C	Revise Figure 5	<i>AGC</i>	4-15-83		LOC	A	NO 114-2013	REV	C
B.	Revised title	<i>cl</i>	5-26-78		B				
A	Rev Figure 3, 4, 5 & Para 3.3.B.	<i>cl</i>	3-11-76						
LTR				SHEET 1 OF 3	SPLICE, THRU, PN 62382, APPLICATION OF				
DIST		APP		DATE					
2									

3.2. Carrier Cutoff Tab and Burr

A. Cutoff Tab

Cutoff tab shall not exceed .010.

B. Burr

Burr on cutoff shall not exceed .005.

3.3. Splice Crimp

A. Crimp Dimensions

- (1) Crimp width, height and type shall be as shown in Figure 5.
- (2) Crimp height shall be measured at the location shown in Figure 2.

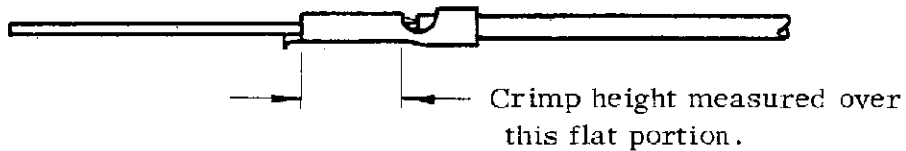


Figure 2

B. Tensile Strength

Crimp tensile strength shall be 5 lb min to separate the lead wire from the uninsulated solid wire, see Figure 1.

C. Seams


Wire barrel and insulation barrel seams shall be completely closed and there shall be no evidence of loose wire strands or wire strands visible in the seam.

D. Bellmouth

Bellmouth not permissible either end.

E. Conductor Location

- (1) Lead wire and uninsulated solid wire shall extend thru the wire barrel.
- (2) Both insulation and conductor shall be visible between the insulation barrel and wire barrel. Care shall be taken not to allow insulation to be crimped in the wire barrel.

		AMP INCORPORATED Harrisburg, Pa.		SHEET 2 OF 3	
LOC B	NO A	114-2013	REV C		
NAME					
SPLICE, THRU, PN 62382, APPLICATION OF					

3.4. Alignment

A. The uninsulated solid wire shall not be bent up or down beyond the limits specified in Figure 3.

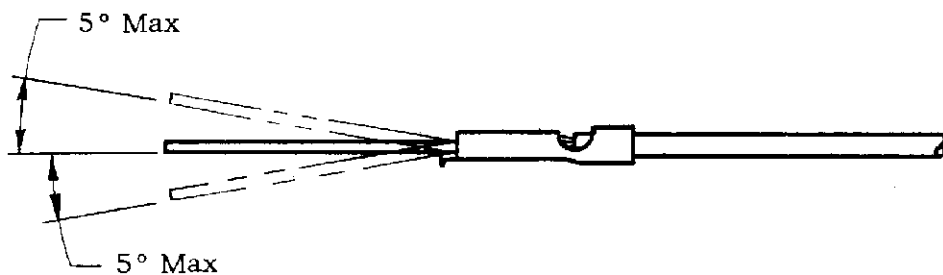


Figure 3

B. The side to side bending of the uninsulated solid wire shall not exceed the limits specified in Figure 4.

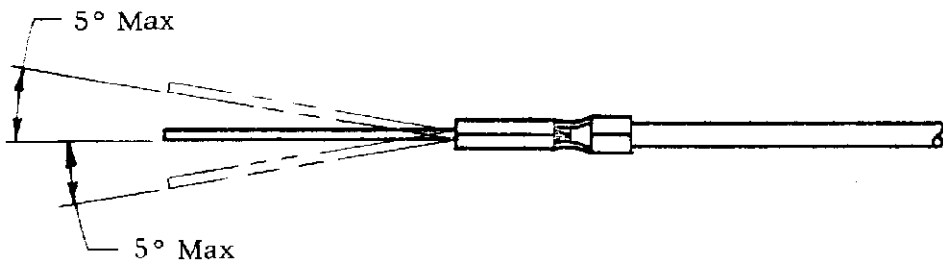



Figure 4

Part No	Wires		Insulation Diameter	Strip Length	Wire Barrel Crimp			Insulation Barrel Crimp		
	No	Size			Width	Height	Type Crimper	Width	Height	Type Crimper
62382	1	26	$\frac{.042}{.038}$.217	$\frac{.050}{.048}$	$\frac{.041}{.039}$	O	$\frac{.059}{.057}$	$\frac{.058}{.055}$	O
	1	25	—	—						

Figure 5

SHEET <u>3</u> OF <u>3</u>		 AMP INCORPORATED Harrisburg, Pa.	
LOC B	NO A	NO 114-2013	REV C
NAME SPLICE, THRU, PN 62382, APPLICATION OF			