


4		3		2		1	
ITEM	CONNECTOR PART NO.	DESCRIPTION		IPI CHECK	EOR CHECK	Applicable Tooling	
1	SYM-41T-P0.5A	YL CONNECTOR - MALE CONTACT				APPLICATOR	
2	SYF-41T-P0.5A	YL CONNECTOR - FEMALE CONTACT					
3	UL1015, 16 AWG	BLACK					

### Applicable Housings

NO. OF CIRCUITS	HOUSING PART NO. FOR FEMALE CONTACT	HOUSING PART NO. WITH PANEL LOCKS FOR MALE CONTACT	HOUSING PART NO. WITHOUT PANEL LOCKS FOR MALE CONTACT
1	YLP-01V	-	YLR-01VF
2	YLP-02V	YLR-02V	YLR-02VF
3	YLP-03V	YLR-03V	YLR-03VF
4	YLP-04V	YLR-04V	YLR-04VF
6	YLP-06V	YLR-06V	YLR-06VF
8	YLP-08V	YLR-08V	YLR-08VF
9	YLP-09V	YLR-09V	-
12	YLP-12VA	YLR-12VA	-
15	YLP-15V	YLR-15V	-
16	YLP-16V	YLR-16V	-
21	YLP-21V	YLR-21V	-

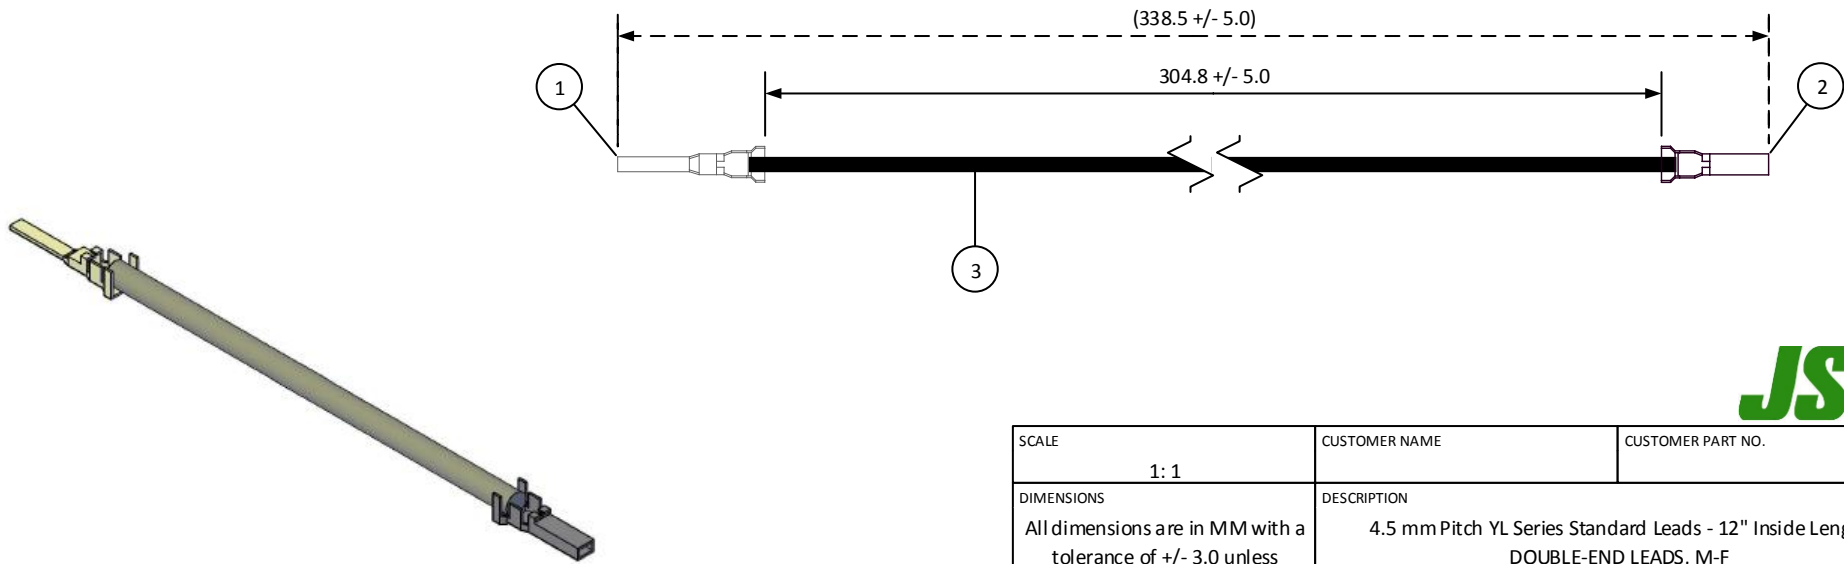

SCALE	CUSTOMER NAME	CUSTOMER PART NO.
1:1		
DIMENSIONS	DESCRIPTION	
All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.	4.5 mm Pitch YL Series Standard Leads - 12" Inside Length DOUBLE-END LEADS, M-F	
DRAWN BY	ASSEMBLY PART NO.	
STEVEN PILKINGTON	ASYMSYF16K305	
CHECKED BY	DRAWING NO. & REVISION	REVISED
JUSTIN BAKER	GAM-093	3/9/2016

REV.	DESCRIPTION	DATE	BY

4

3

2

1