
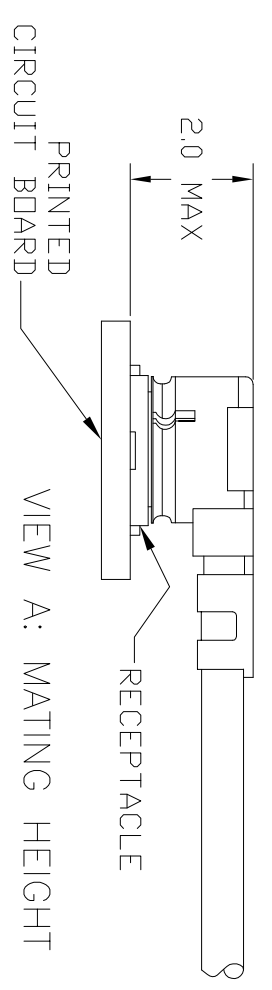


LOC	HT	DIST	OO	REVISONS	
P	LTR	0		DATE	DWN
				29APR05	HXF
					DF

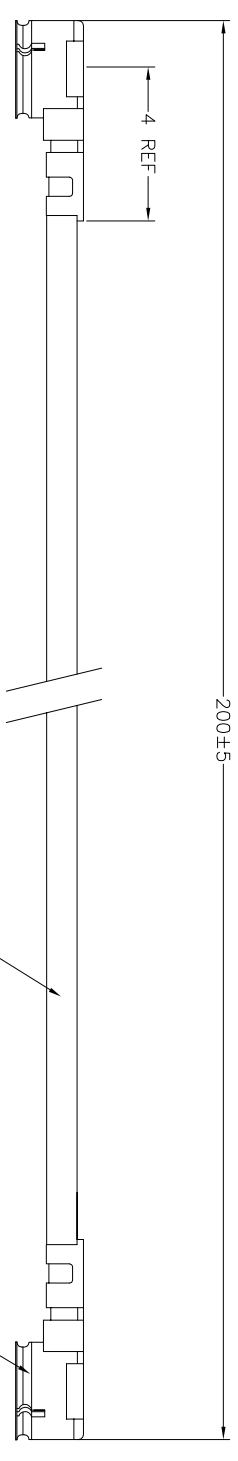

- NOTES:
- HIROSE COMPATIBLE, 2.0MM MATING HEIGHT.
 - 100% ELECTRICAL TESTING FOR: CONTINUITY AND SHORTS. HI-POT AT 150 VDC FOR 100ms
FREQUENCY RANGE: DC TO 6 GHz
VSWR 1.4:1 MAX
 - PRODUCT RATINGS:
TEMPERATURE: -40 TO +90 DEG.C
VOLTAGE: 60 VAC
CHARACTERISTIC IMPEDANCE: 50 OHMS
MATING DURABILITY: 30 CYCLES

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLG	±	DWN	29APR05
1 PLG	±	CHK	Hao Xiangfeng
2 PLG	±	APP'D	Fouli Zhou
3 PLG	±	DENVER WILLSON 27MAR05	
4 PLG	±	PRODUCT SPEC	
ANGLES	±	APPLICATION SPEC	
FINISH	±	WEIGHT	

AR	MM	MINIATURE COAXIAL CABLE, 0.80mm OD	2
2	PC	UMCC TYPE II PLUG	1
QTY UNIT		DESCRIPTION	ITEM

SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
A4	00779	1750108-2		

SCALE		1:1	SHEET	1 OF 1	REV	0
-------	--	-----	-------	--------	-----	---