


# CU200211-Y1A

## SIMPLIFIED DATASHEET

### Features

20 character x 2 line display.  
Largest character size display in the series.

### Physical dimension

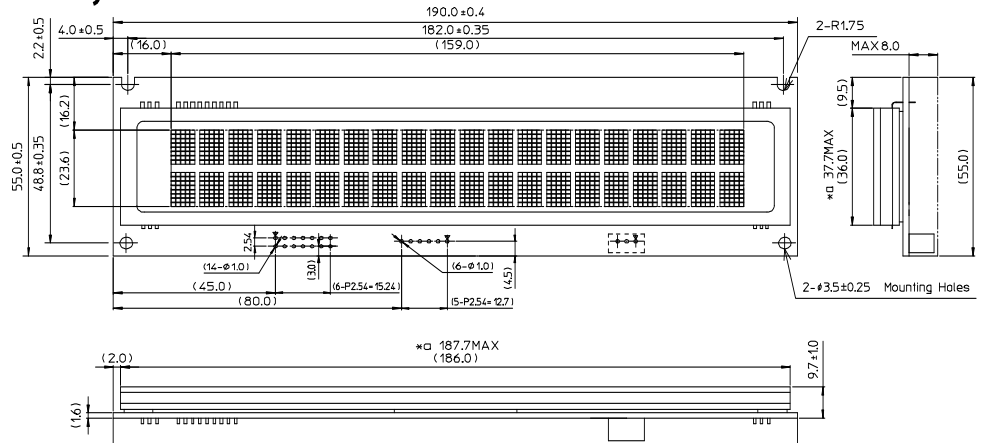

( ) Reference only  
Unit:mm  
\*a Including extra frit glass

### Get full specification



Click here to go to request form.

### Specifications

#### Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply Voltage	VCC	4.75	5.00	5.25	VDC	-

#### Electrical Characteristics

#1: Brightness 200% #2: Brightness 100%

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
'L' Logic Input Current						
D0-D7, /WR, /RESET	IIL1	-	-	-0.15	mA	VIN=0V
SIN, SCK	IIL2	-	-	-0.55	mA	VIN=0V
'H' Logic Input Current						
D0-D7, SIN, SCK	IiH1	-	-	5.0	μA	VIN=5V
/WR, /RESET	IiH2	-	-	0.25	μA	VIN=5V
'L' Logic Input Voltage						
D0-D7, /WR, SIN, SCK	VIL1	0	-	0.2VCC	VDC	-
/RESET	VIL2	0	-	0.8	VDC	-
'H' Logic Input Voltage						
D0-D7, /WR, /RESET, SIN, SCK	VIH	0.8VCC	-	VCC	VDC	-
'L' Logic Output Voltage						
PBUSY	VOL1	-	-	0.1	VDC	IOL=50 μA
SBUSY	VOL2	-	-	0.45	VDC	IOL=200 μA
'H' Logic Output Voltage						
PBUSY	VOH1	VCC-0.1	-	-	VDC	IOH=-50 μA
SBUSY	VOH2	VCC-0.5	-	VCC	VDC	IOH=-200 μA
Power Supply Current #1	ICC1-1	-	720	920	mADC	Display ON
Power Supply Current #1	ICC2-1	-	560	720	mADC	Display OFF
Power Supply Current #2	ICC1-2	-	980	1260	mADC	Display ON
Power Supply Current #2	ICC2-2	-	640	820	mADC	Display OFF
Power Supply Current #3	ICC3	-	18	30	mADC	Disp. Power OFF
Power Consumption #1		-	3.6	4.6	W	Display ON
Power Consumption #2		-	5.0	6.4	W	Display ON

#### Optical Characteristics

#1: Brightness 200% #2: Brightness 100%

Parameter	Value
Luminance	350 cd/m <sup>2</sup> Min.
	#1 1000 cd/m <sup>2</sup> Typ.
	#2 2000 cd/m <sup>2</sup> Typ.
Color of illumination	Green (Blue-Green)

#### Environmental Conditions

Parameter	Value
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Storage Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (Non operation)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (Non operation)	392m/s <sup>2</sup> (40G) 9ms X-Y-Z, 3 times each direction

#### Physical Specifications

Parameter	Value
Number of Char.	40 (20 characters x 2 lines)
Built-in Fonts	5 x 8 ANK, International font
Display Area	159.0 x 23.59 mm (X x Y)
Character Size	6.52 x 10.51 mm (X x Y)
Character Pitch	8.03 mm
Line pitch	13.08 mm
Weight	About 119 g

#### Interface

Parallel (CMOS), Sync/Asynchronous Serial (CMOS)

#### Pin Assignment (Parallel)

Pin No	Signal	Pin No	Signal
1	GND	2	Vcc
3	PBUSY	4	/RESET
5	/WR	6	NC
7	D0(LSB)	8	D1
9	D2	10	D3
11	D4	12	D5
13	D6	14	D7(MSB)

#### (Serial)

Pin No	Signal	Pin No	Signal	Baud Rate Setting
1	Vcc	1	Vcc	9600bps
2	SIN	2	SIN	19200bps
3	GND	3	GND	38400bps*
4	SBUSY	4	SBUSY	115200bps
5	SCK	5	NC	(*:Default setting)
6	/RESET	6	/RESET	

#### Functions

Parameter	Value
Highlight Function	
Font Magnification	
Horizontal scroll mode	
Blink ON/OFF	
Power save mode	
Screen saver	
Cursor, Underline ON/OFF	
User Font function	
etc.	



Leaflet contents, and specifications and external appearance of products, may change without notice.

Please confirm product details in the specification.

(C)Copyright NORITAKE ITRON CORP.