


COIL: @ 25° C  
 RESISTANCE 700 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 13.5 VDC  
 MUST RELEASE 1.5 VDC

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE TIME 4 MS MAX.  
CONTACT BOUNCE 2 MS MAX.

**CUSTOMER DATA SHEET**

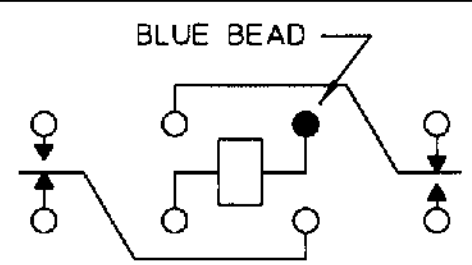

CONTACT RATING: LOW LEVEL TO  
5 AMPS 28 VDC RESISTIVE  
100,000 OPERATIONS

DR. R.B. 6/4/98 CK. *[Signature]*



CUST. C. I. I. STD.  
 CUST. NO. \_\_\_\_\_

TYPE HFW5A RELAY

**HFW5A1106K00**