
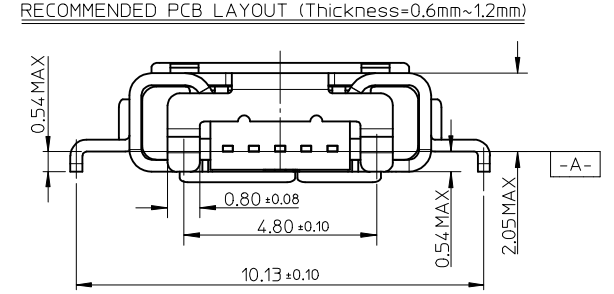


- NOTE :
- MATERIAL :
 HOUSING : LCP, BLACK, UL94V-0
 TERMINAL : COPPER ALLOY THICKNESS = 0.15 MM
 SHIELD CASE : STAINLESS STEEL THICKNESS = 0.30 MM
 - PLATING :
 TERMINAL: CONTACT AREA : GOLD FLASH (0.11 MICRON MIN.) OVER MINIMUM 0.75 MICRON Pd/Ni.
 SOLDER TAIL AREA : GOLD FLASH (0.05 MICRON MIN.).
 UNDER PLATING : NICKEL 2.0 MICROMN MINIMUM.
 SHIELD : MATTE TIN 1.27 MICRON MINIMUM.
 UNDER PLATING : NICKEL 1.27 MICRON MINIMUM.
 - TAIL COPLANARITY 0.08 MM MAXIMUM.
 - PRODUCT SPEC. : PS-47589-001 ; PACKING SPEC. : PK-47654-001
 - COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV DIRECTIVE 2000/53/EC.

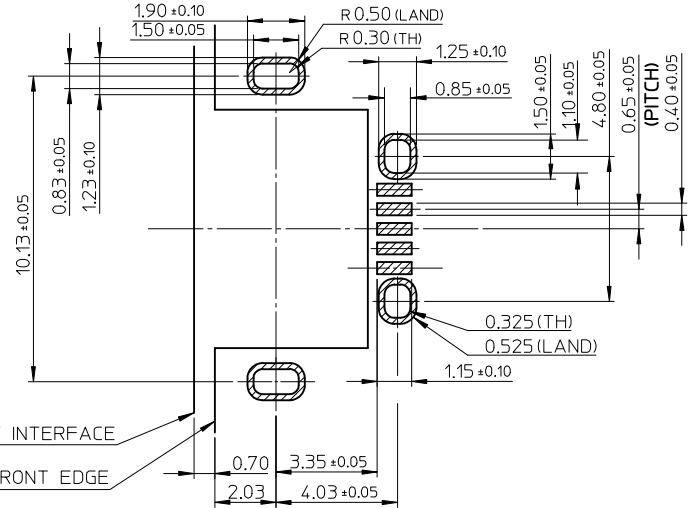

REVISE EC NO: SH2009-0717 DRWN: XJSONG 2009/05/08 CHKD: XJSONG 2009/05/11 APPR: HWANG 2009/07/23	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY XJSONG	DATE 2008/03/26	TITLE MICRO USB AB REC. SINK TYPE ASS'Y			
		4 PLACES	± ---	± ---	CHECKED BY JTIAN	DATE 2008/03/26	MOLEX INCORPORATED			
		3 PLACES	± ---	± ---	APPROVED BY HWANG	DATE 2008/03/26				
2 PLACES	± 0.15	± ---	MATERIAL NO. 47654-0001		DOCUMENT NO. SD-47654-001		SHEET NO. 1 OF 1			
1 PLACE	± 0.25	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							
ANGULAR ± 3 °		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								