


5

4

3

2

1

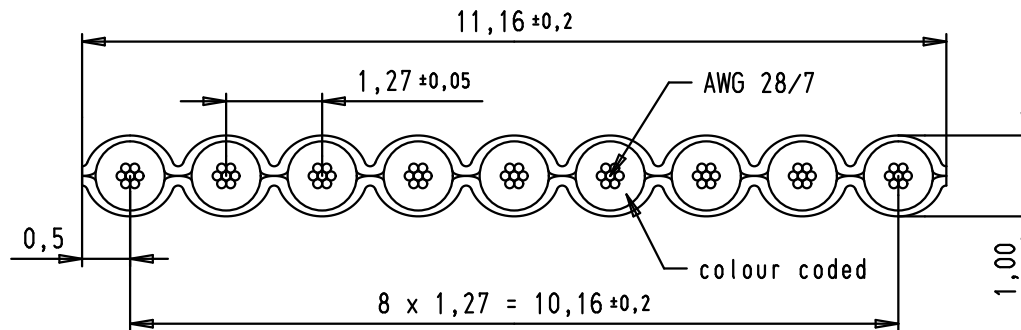



Wire	Cu tinned
Gauge	AWG 28/7
Voltage rating	300 Vr.m.s
Current (Max)	2,1A at 25°C
Conductor resistance	221 mΩ/m
Capacity unbalanced	42,7 pF/m
Impedance unbalanced	105 Ω
Inductance unbalanced	0,68 μH/m
Signal delay	4,9 ns/m
Insulation material	PVC
Temperature rating	-20°C (operating) to 105°C -30°C (static)
Flammability rating	UL: VW1
Insulation resistance	100 MΩ/km
Approval	UL AWM style 2651

Colour code sequence (in 10 steps):

- brown
- red
- orange
- yellow
- green
- blue
- violet
- grey
- white
- black

A

				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 rainbow Flat cable 9 poles, length per reel: 30,48 m IEC 918	Maßstab/ Scale 10:1
			Detail.	14/05/07	PK			
			Insp.					
			Stand.					
EC01446	22/02/10	SC	HARTING EURL F-95972 Paris				TB 09 18 009 7005	Blatt/ Page 1 / 1
33990	14/05/07	PK						
Mod.	Dot.	Name						
							Sub.	