

Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 0201 NPO 1.0pF 50V (0201N1R0B500CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0201 (0603)	0.6±0.03	0.3±0.03	0.3±0.03


2. Cap, DF, IR @25°C

(Cap, DF @1MHz, 1Vrms ; IR @50V, 120sec)

Item	Spec
Cap [pF]	1.0(±0.1pF)
DF	≤ 0.24%
IR [G-ohm]	≥ 10


3. Impedance/ESR-Frequency

(Equipment: 4287A+ENA5071C)

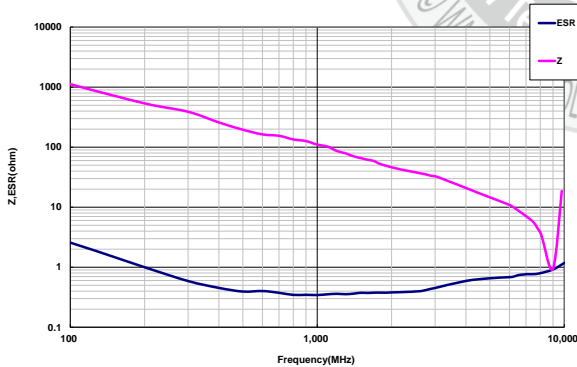

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

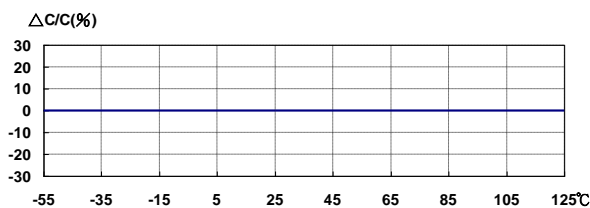

5. Capacitance – DC Voltage Characteristics

(Equipment: 4284A; DC charge 60±5sec)

25V : 0% ; 50V : 0%

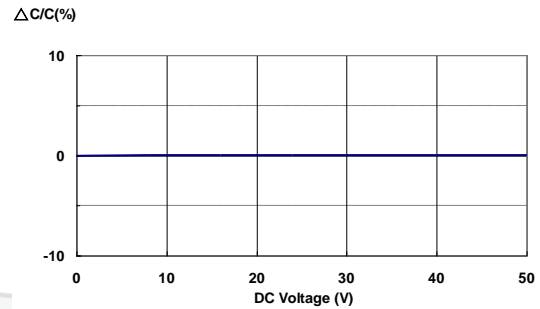

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

