


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

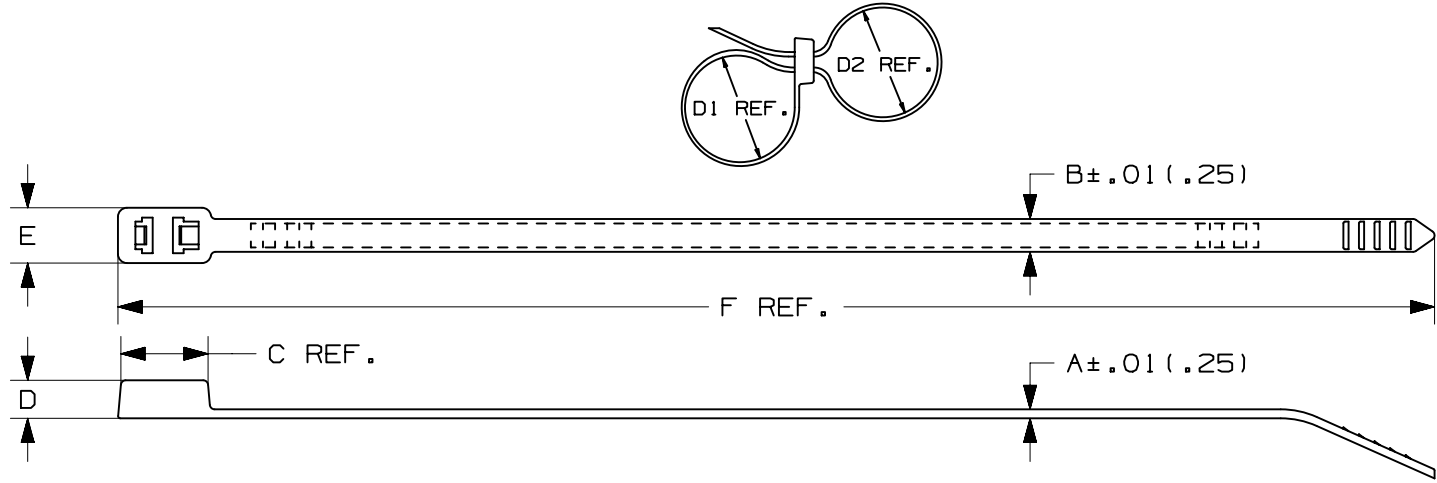

PANDUIT * PART NO.	MAX. COMBINED BUNDLE DIA. D1 + D2 in (mm)	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	MIN. LOOP TENSILE lbs (N)	CROSS- SECTION	WEIGHT lbs/100pcs (g)
PLB2S	1.8 (45.7)	.052 (1.3)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.320 (8.1)	7.6 (193)	50 (222)	STANDARD	.34 (154)
PLB3S	3.0 (76.2)	.052 (1.3)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.337 (8.6)	11.8 (300)	50 (222)	STANDARD	.47 (214)
PLB4S	4.1 (104.1)	.052 (1.3)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.337 (8.6)	14.8 (376)	50 (222)	STANDARD	.58 (262)

* SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

A

A

D10100DA/16

						TITLE BOW-TY CABLE TIES PLB SERIES CUSTOMER DRAWING						
						ITEM REVISION NAME 10B0150W/00						
						DATASET FILE NAME 10B0150W_DC_PLB/00A						
						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .xxx ± .020 [.51] .xx ± .02 [.5] ANGLS ±				MATERIAL: NONE		
						DRAWING NUMBER: SS-21645						
6	11.20.14	BDK	MPH	JADE	UPDATED TITLE BORDER AND UPDATED NOTES	SS-21645		THIRD ANGLE PROJECTION				
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY KEM	DATE 4/6/87	CHK HVP	SCALE NONE	SHT 1 OF 1	SIZE A