

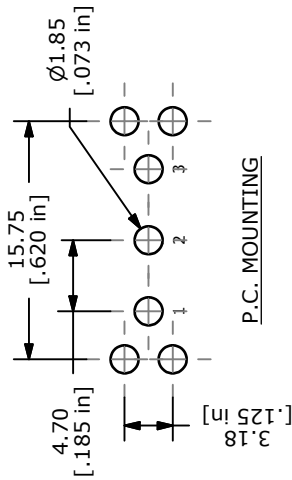
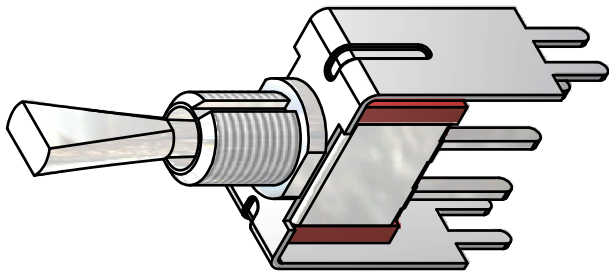


| SWITCH FUNCTION |        |        |
|-----------------|--------|--------|
| POS. 1          | POS. 2 | POS. 3 |
|                 |        |        |
| ON              | OFF    | (ON)   |
| 2-3             | OPEN   | 2-1    |


(ON) = MOMENTARY

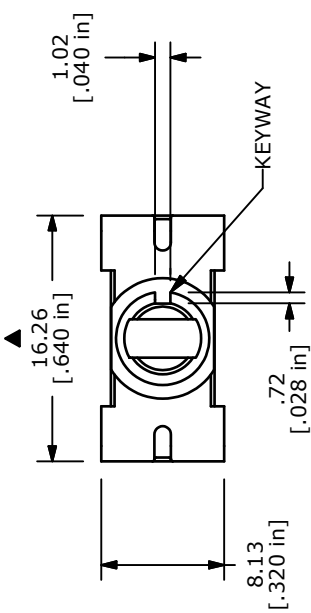

CIRCUIT: SPDT



ISOMETRIC

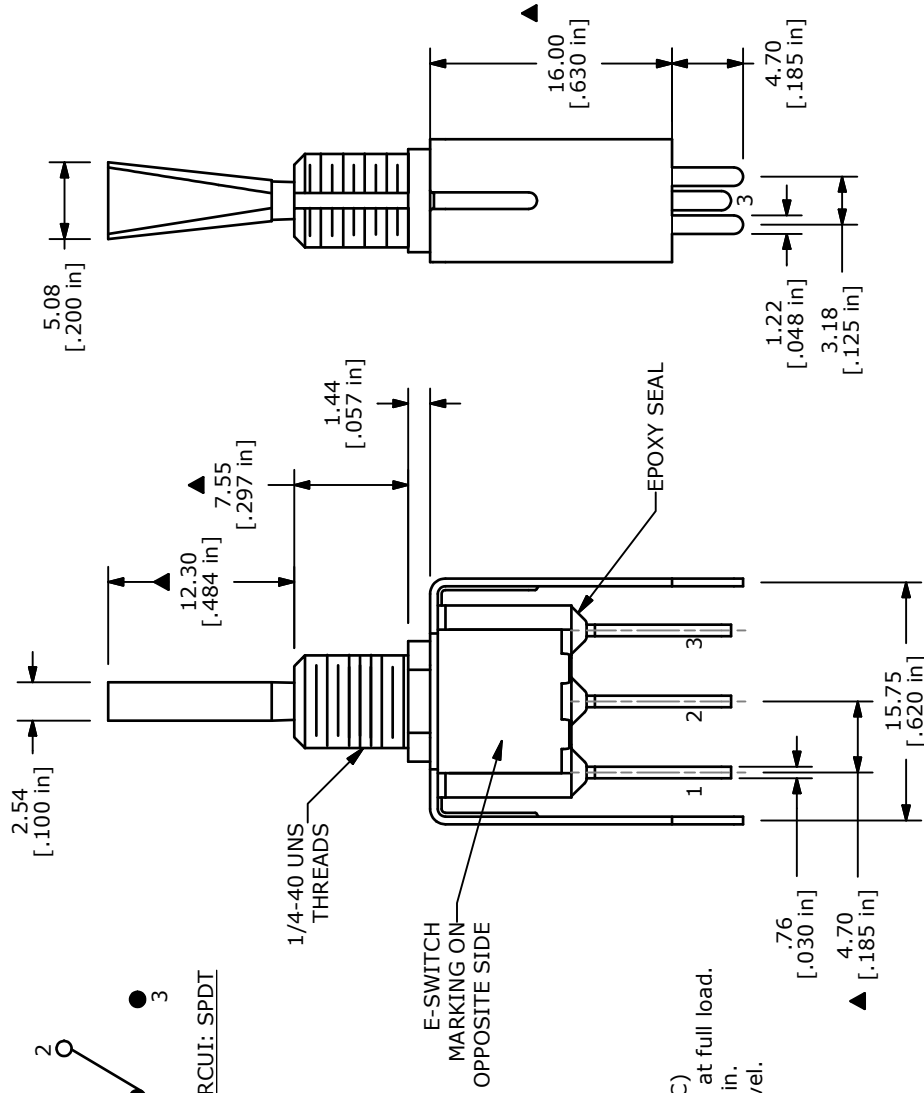

- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERMINAL NUMBERS FOR REF ONLY
  4. PLATING MATERIAL: GOLD
  5. RATING: 0.4 VOLT-AMPS @20V MAX (AC OR DC)
  6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
  7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
  8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
  9. OPERATING TEMP.: -30°C to 85°C
  10. ▲ DENOTES CRITICAL PARAMETER.
  11. 2002/95/EC (ROHS) COMPLIANT
  12. PACKAGE: TRAY/108 PIECES PER
  13. HARDWARE TO BE SHIPPED BULK:  
T100011 - LOCK WASHER, QTY 1  
T100015 - LOCK RING, QTY 1  
T100000 - HEX NUT, QTY 2

**E-SWITCH®**

TITLE 100SP5T6B11VS3REH

|     |        |             |          |     |
|-----|--------|-------------|----------|-----|
| A   | 19537  | NEW RELEASE | 12/20/10 | BGL |
| REV | PCR NO | DESCRIPTION | DATE     | BY  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2:1

DATE 12/20/2010

DR BGL

DWG ST115031

REV A