

## HC-B 32-TFQ-80/O1STM40G


Order No.: 1647307

Photo shows sleeve housing with support

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1647307>

HEAVYCON sleeve housing B32, for double locking latch, height 80 mm, with thread 1x M40, straight conductor exit

### Commercial data

GTIN (EAN)	 4 017918 956929
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 504 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
03/01/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data


#### General data

Note	For contact inserts HC-B32, DD144, M
Design	B32
Height	80 mm
Width	79 mm
Length	94 mm

Housing type	Sleeve housings
Locking type	For double locking latch
Cable exit	Straight
Type of the screw connection	1x M40
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Material lock	Steel, galvanized

### Diagrams/Drawings

Dimensioned drawing

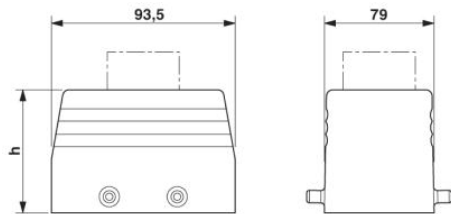

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;