
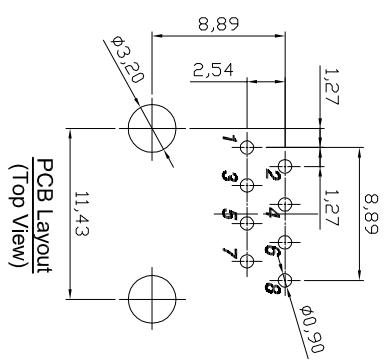


Specification:

- Electrical Char
 - Insulation Resistance: 500MΩ min. 500V DC for 1 minute
 - Contact Resistance: 30mΩ max.
 - Rating Current: 1.5A max.
 - Rating Voltage: 150V AC
 - Dielectric Voltage: 1000 Vrms at 1MA 60 sec. min.
- Physical Char
 - Housing: PBT Glass filled (UL 94V-0) Color: Black
 - Soldering Temperature: 235°C for 5 sec.
 - Spring Wire: 0.35mm thickness Phosphor Bronze
 - 6u" Gold on contact area,
 - gold flash on solder area, all over 50u" Nickel
 - Temperature Range: -40°C to +85°C
 - Durability: 750 mating cycles min.
- Packing: Tray



RoHS compliant
Unit:mm

Scale	Free						
TOLERANCE							
.XX	±0.20						
.XXX	±0.13						
.XXXX	±0.05						
DIM	TOL						
Angle	+0°30'	Id.	Drawn	Modification	Date	Name	
		①	28.10.2015		28.10.2015	Amy	

Date	Name	Customer-No.	Drawing-No.	Replace	SHEET
28.10.2015	Amy				
28.10.2015	Amy	ASSMANN WSW-No.	A-2004-2-4-R	ASS 7038 CO	rev00
				ASSMANN	
				components	

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	B
1	2	3	4	5	6	7	C
1	2	3	4	5	6	7	D
1	2	3	4	5	6	7	E
1	2	3	4	5	6	7	F
1	2	3	4	5	6	7	G
1	2	3	4	5	6	7	H