



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	02	J3	REVISED PER ECO-11-004820	11MAR11	RK HMR

AMP WIRE RANGE	AMP INSULATION RANGE
22-16 AWG 0.3-1.5 mm <sup>2</sup>	.140 MAX DIA 3.5 MAX DIA

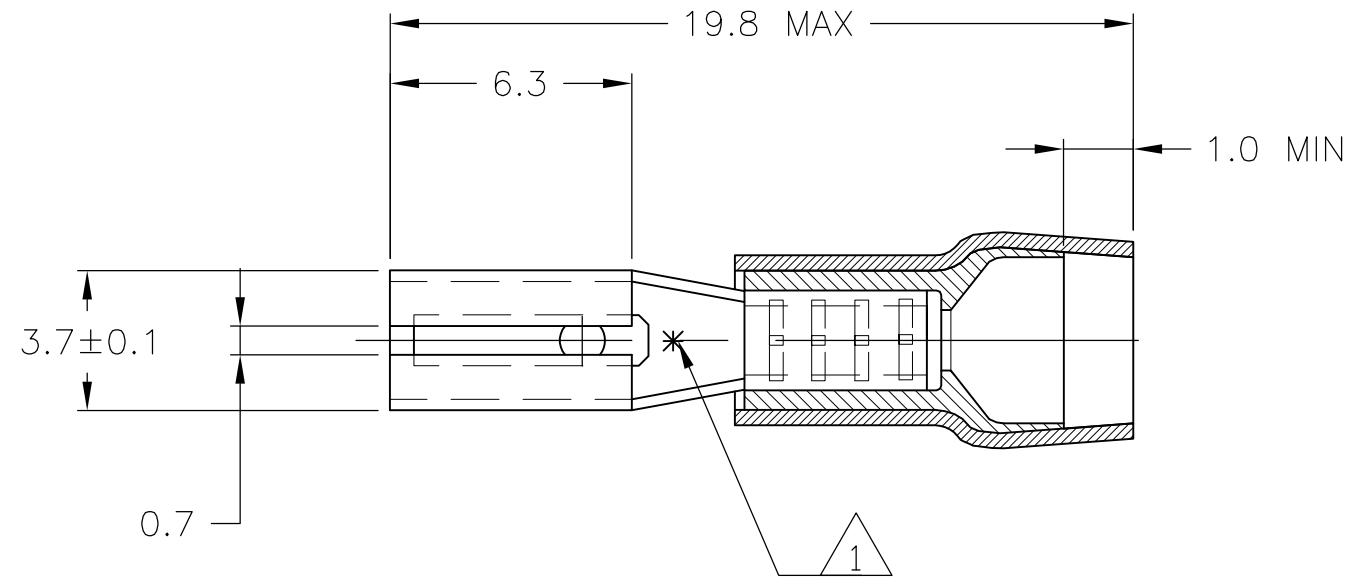

1 ASTERISK \* FOR PHOS BRONZE VERSION ONLY  
 2 OBSOLETE W/O REPLACEMENT

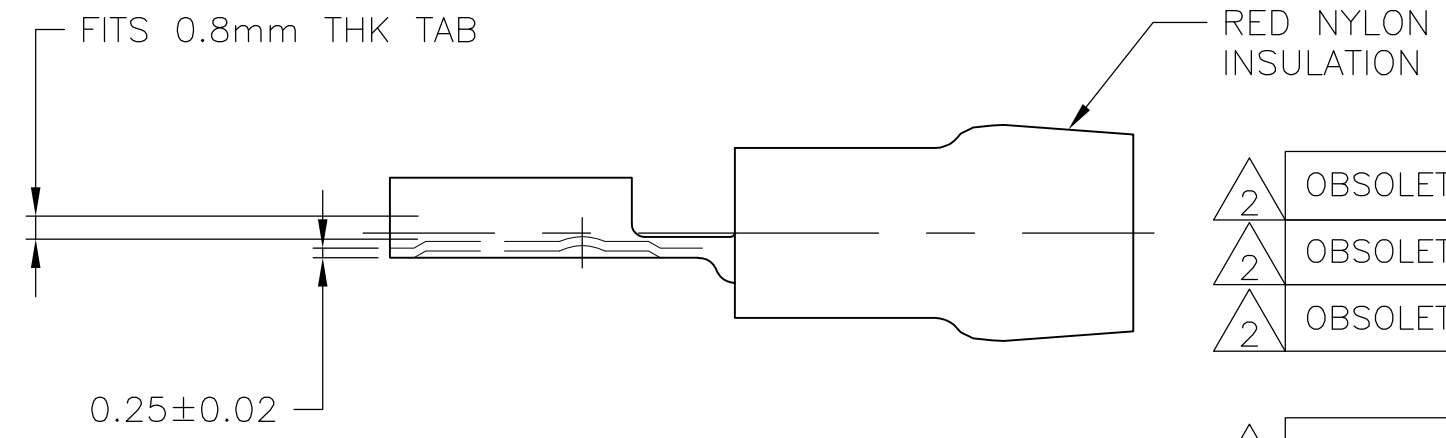

2	OBSOLETE	TIN-LEAD	PHOS BRONZE	165566-7	
2	OBSOLETE	GOLD	PHOS BRONZE	165566-6	
2	OBSOLETE	GOLD	BRASS	165566-5	
		SILVER	PHOS BRONZE	165566-4	
2	OBSOLETE	SILVER	BRASS	165566-3	
		TIN	PHOS BRONZE	165566-2	
		TIN	BRASS	165566-1	
		PN ON TAPE	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	jr_ruth	15APR05	<b>STE</b> TE Connectivity		
CHK	T MICHIELUTTI	15APR05			
APVD	T MICHIELUTTI	15APR05			
PRODUCT SPEC	NAME				
APPLICATION SPEC	RECEPTACLE, FASTON, PIDG, .110 SERIES		RESTRICTED TO		
WEIGHT	-	SIZE	CAGE CODE	DRAWING NO	-
CUSTOMER DRAWING		A3	00779	C-165566	-
MATERIAL		SCALE		SHEET	REV
FINISH		1:1		1 OF 1	J3

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	± -
1 PLC	± 0.2
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± 5°
MATERIAL	FINISH
-	-