


IB IL TEMP CON RTD-PAC

Order No.: 2861771



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2861771>

Inline temperature regulators, complete with accessories (connector and labeling field), 6 inputs for resistance thermometers, 6 outputs, 24 V DC, 3-wire connection method

| Commercial data | |
|--------------------------|--|
| GTIN (EAN) |  4 017918 894535 |
| Note | Made-to-order |
| sales group | K413 |
| Pack | 1 pcs. |
| Customs tariff | 85389091 |
| Catalog page information | Page 53 (AX-2005) |

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

| Technical data | |
|----------------------|-------------------|
| General data | |
| Degree of protection | IP20 |
| Weight | 122 g |
| Width | 48.8 mm |
| Height | 136.8 mm |
| Depth | 71.5 mm |
| Mounting type | DIN rail |
| Name | Inline connectors |

| | |
|--|------------------------|
| Type of connection | Spring-cage connection |
| Conductor cross section solid min. | 0.08 mm ² |
| Conductor cross section solid max. | 1.5 mm ² |
| Conductor cross section stranded min. | 0.08 mm ² |
| Conductor cross section stranded max. | 1.5 mm ² |
| Conductor cross section AWG/kcmil min. | 28 |
| Conductor cross section AWG/kcmil max | 16 |
| Connection method | 3-conductor (shielded) |

Interfaces

| | |
|--------------------|--------------------|
| Interface | Inline local bus |
| Type of connection | Inline data jumper |

Power supply

| | |
|-----------------------------|-------------------------------|
| Communications power U_L | 7.5 V DC (via voltage jumper) |
| Typical current consumption | 250 mA |
| Max. current consumption | 4 A |

Electrical isolation

| | |
|--------------|--|
| Test section | 5 V supply, incoming remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min |
| | 5 V supply, outgoing remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min |
| | 7.5 V supply (bus logics)/24 V supply (I/O) 500 V AC 50 Hz 1 min |
| | 24 V supply (I/O) / functional earth ground 500 V AC 50 Hz 1 min |
| | Analog inputs/bus logics 500 V AC 50 Hz 1 min |
| | Analog inputs/24 V supply (I/O) 500 V AC 50 Hz 1 min |
| | Analog inputs/functional earth ground 500 V AC 50 Hz 1 min |

Inline potential routing

| | |
|------------------------------------|-------------------------|
| Communications power U_L | 7.5 V |
| Current consumption from U_L | max. 150 mA |
| | Typ. 90 mA |
| Segment supply voltage U_S | 24 V DC (nominal value) |
| Current consumption from U_S | max. 0.5 A |
| Current consumption from U_{ANA} | Typ. 20 mA |

Inputs

| | |
|-------------------------------|------------------|
| Number of inputs | 6 |
| Connection method | 4-wire |
| Measured value representation | -200°C ... 850°C |
| Measured value resolution | 0.1 K |
| A/D conversion time | Approx. 70 ms |
| Number of inputs | 6 |

Outputs

| | |
|-------------------|------------------------|
| Number of outputs | 6 |
| Connection method | 3-conductor (shielded) |
| Output voltage | 24 V DC |
| Output current | 70 mA |

Certificates / Approvals



| | |
|-------------------|-----------------------|
| Certification | CUL, GOST, UL |
| Certification Ex: | CUL-EX LIS, UL-EX LIS |

Accessories

| Item | Designation | Description |
|------|-------------|-------------|
|------|-------------|-------------|

Cable/conductor

| | | |
|---------|-----------------|--|
| 2819419 | TEMPCON CAB-V24 | Interface cable for Inline temperature controllers (IB IL TEMPCON ...), single |
|---------|-----------------|--|

Literature

| | | |
|---------|-----------------------------|---|
| 2698818 | IB IL TEMPCON FUNCTION UM | User manual, German, for setting the controller functions of Inline temperature controllers, only available as a download. |
| 2698821 | IB IL TEMPCON FUNCTION UM E | User manual, English, for setting the controller functions of Inline temperature controllers, only available as a download. |
| 2698779 | IB IL TEMPCON RTD SYS UM | User manual, German, for Inline temperature controllers, only available as a download. |
| 2698782 | IB IL TEMPCON RTD SYS UM E | User manual, English, for Inline temperature controllers, only available as a download. |

Marking


| | | |
|---------|-----------|---|
| 0809492 | ESL 62X10 | Insert strip for laser printer, lettering field: 62 x 10 mm |
|---------|-----------|---|

Software


| | | |
|---------|-------------------|--|
| 2819370 | IB IL TEMPCONTROL | License key for using the engineering tools for the multi-channel process controllers of type: IB IL TEMPCON 300, including interface cable TEMPCON CAB-V24. The software must also be downloaded. |
|---------|-------------------|--|

Diagrams/Drawings

Connection diagram

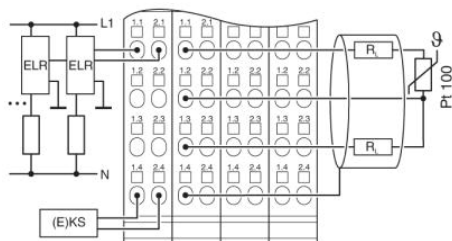

Dimensioned drawing

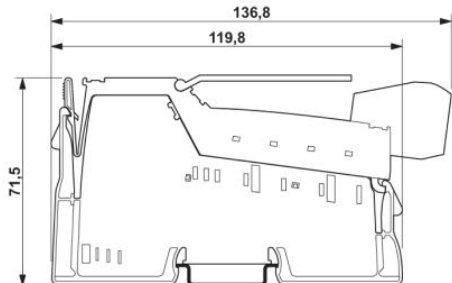

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;