

Modification To A Standard Part

Modification Part Number

214A0XX - X - 08

Modification Description (in words)

OVEREXPANDED

Dimensions :-

	H	J	K
	MIN	MIN	MIN
	a	a	a
214A011	20.0	15.0	9.0
214A021	28.0	15.0	11.0
214A032	42.0	15.0	15.0
214A042	59.0	16.0	19.0
214A052	58.0	17.0	21.0

All Other Dimensions Conform To Standard Product . . . 214A0XX

Copy Of Standard Product S.C.D. Available On Request


*Special Notes***Copyright(!)
Urheberrechte**

The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced, or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.


Drawn A.Lilley Checked *sh* Issue 2 Date JUNE 1987Conforms to ISO Recommendations
3rd Angle Projection
Not to scaleApproval
Design

MKTG

Q.C.

R.W.Evans

Ordering Information

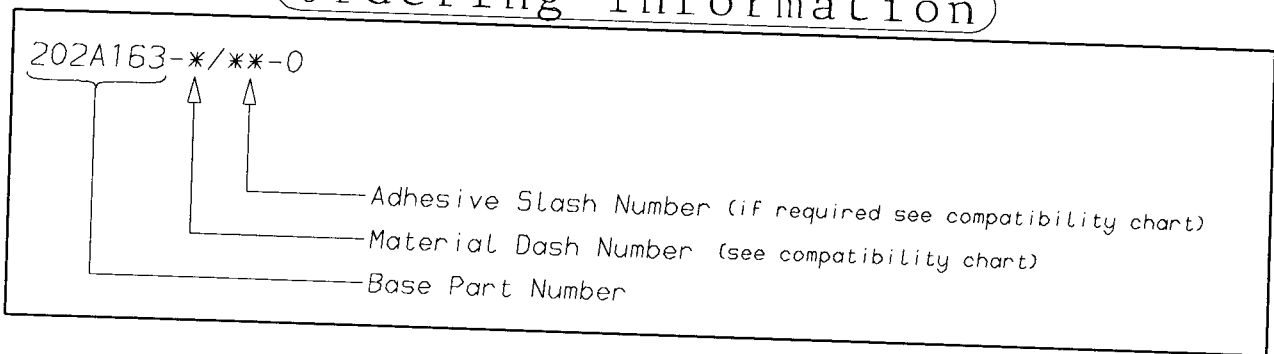

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42, /86
-4	POLYOLEFIN, FLEXIBLE	/42, /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

POTTING PORTS ARE OPTIONAL
WHEN SPECIFIED BY SUFFIX "-00"
THEY WILL BE LOCATED AS SHOWN

Raychem
Electronics OEM Division Europe
Swindon, Wiltshire, England.
Telephone: (01793) 528171 Fax: 573923