



This is issued in strict confidence on condition that it is not used as a basis for manufacture or sale, and that it is not copied, reprinted or disclosed to a third party either wholly or in part without prior written consent of ITT Cannon.

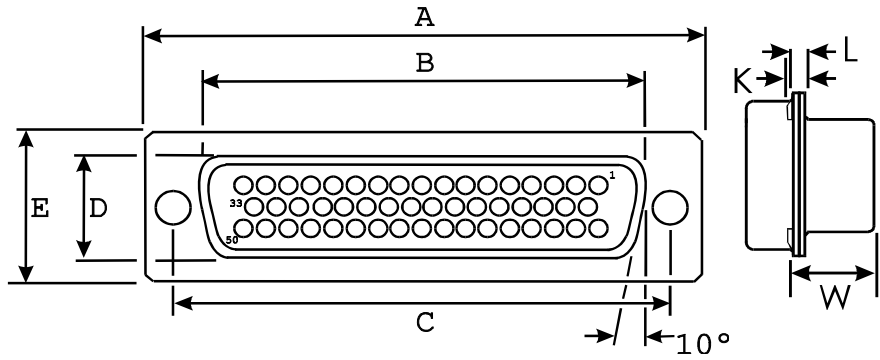

Selected hardware option  
with 2,26 (.089) mounting hole

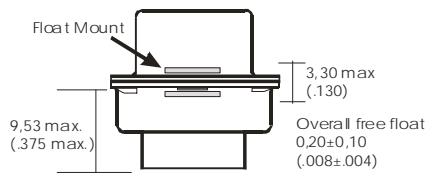

A ± 0,38 (.015)	B ± 0,13 (.005)	C ± 0,13 (.005)	D ± 0,13 (.005)	E ± 0,38 (.015)	L ± 0,25 (.010)	W ± 0,41 (.016)	K ± 0,51 (.020)
66,93 (2.635)	52,42 (2.064)	61,11 (2.406)	10,74 (.423)	15,37 (.605)	0,76 (.030)	6,94 (.273)	1,27 (.050)

50 crimp signal contacts, part number 031-1007-042 kitted with each connector  
Kitted with tool CIET-20HD

DESCRIPTION	MATERIAL	FINISH
Insulator	Polyester	None, (Color White), Copper alloy retention clips
Shells	Steel	Yellow Chromate over Zinc
Signal Contacts	Copper alloy	50 u inch Gold over Cu with Stainless Steel Sleeve
Rivets	Stainless Steel	Passivated
Washers	Stainless Steel	Passivated

Unless otherwise specified, dimensions are in mm & (in.) Tolerances are (.XXX = mm) Decimals      Angles X    ± 0,20 (.008)    X° ± 1.0° XX   ± 0,10 (.004) XXX ± 0,05 (.002)	Issue Date: 18-May-18	Cannon	ITT Industries
	CONNECTOR, RECEPTACLE, ELECTRICAL D-SUBMINIATURE 50 POSITION CRIMP		
	PART NO.	<b>DDMAMYT50S</b>	