

Kabeltülle PG12, Plug, solder terminal, insulated, 7.5 mm, 4-pole, straight, UK-Connector



Description


- Solder terminal :
for cable mounting
- Data and Signal transfer
- Data and Signal Connectors 4-pole , insulated , straight

Technical Data

Diameter	7.5 mm	Allowable Operation Temperature	-20 °C to 70 °C
Number of Poles	4-pole	Terminal	solder terminal
Ratings DC	2 A / 12VDC	Housings	insulated
Ratings AC	2 A / 12 VAC	Style	straight
Dielectric Strength	1000VDC	Lifetime	50000 Insertions
Insulation Resistance	> 10000 MΩ @ 500VDC		
Material: Housing	black		

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimensions

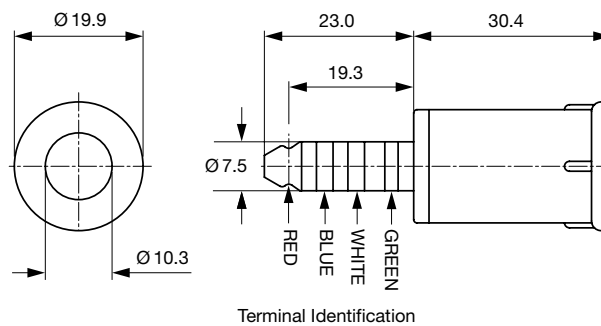

All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Data and Signal Plug/Sockets	7.5	4-pole	solder terminal	4804.1400

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 100 Pcs

Accessories

Description



4804.0001
Sleeve black, 5.6 mm

Mating Outlets/Connectors

Category / Description



[Data and Signal Plug/Socket Overview complete](#)

Kabeltülle PG12, Socket, solder terminal, screened, 7.5 mm, 4-pole, straight, UK-Connector	4804.2400
Kabeltülle PG12, Socket, solder terminal, insulated, 7.5 mm, 4-pole, straight, UK-Connector	4804.2410

[Data and Signal Plug/Socket further types to 4804.1400](#)