


REVISIONS		DATE	APPROVED
ZONE	LTR	DESCRIPTION	
	N/C	RELEASED PER ECN T-18675	10/93 R. Haagman
	A	REVISED PER ECN T-19034	3-22-94 R. Haag

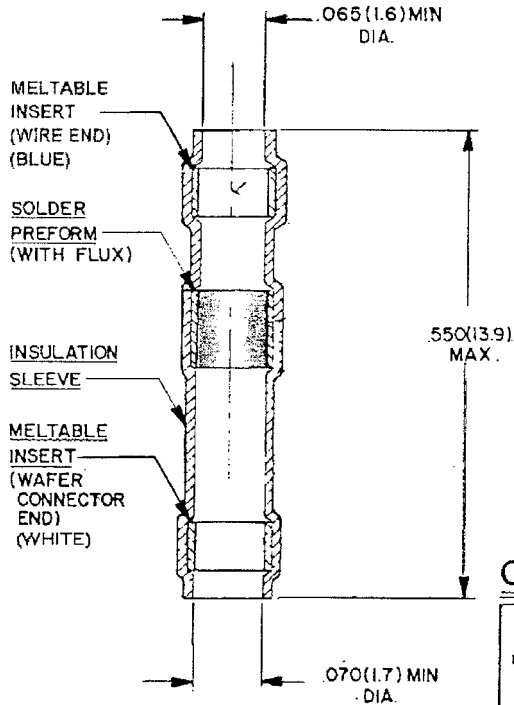

NOTES :

1. MATERIALS :

- I-A INSULATION SLEEVE; HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.
- I-B SOLDER PREFORM; SOLDER PREFORM WITH FLUX TYPE: SN96 SRAP PER Q0-S-57I.
- I-C MELTABLE INSERTS; LOW OUTGASSING IMMERSION RESISTANT THERMOPLASTIC

2. THIS SLEEVE IS DESIGNED TO ATTACH 20 THROUGH 26 GAGE CONDUCTORS TO THE TERMINALS OF A **Raychem** MTC100 SERIES WAFER.

© Raychem Corporation 1979

CONNECTOR SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES BRACKETED DIMENSIONS () ARE METRIC AND TOLERANCES ARE: XXX ± (M M) XX ± (M M) Δ ±	DRAWN	D PIQUE	93SEP29	Raychem <small>RAYCHEM CORPORATION 300 CONSTITUTION DR. MENLO PARK CA.</small>
	CHECKED	R.W.	10-28-93	
	APPROVED	Haag	10-93	
	APPROVED			
TITLE				SOLDER SLEEVE WIRE TERMINATOR DOUBLE SEAL FOR TEMP RATING (150°C) (SN96) MTC100 SERIES
PROJECT				0225.PCX
SIZE		CODE IDENT	DWG. NO.	CTA-0225
A		NO. 06090		
WEIGHT			SHEET 1 OF 1	

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

DO NOT SCALE THIS DRAWING