



PRODUCT NUMBER	PITCH
YK303xx0x0JOG	7.62 mm

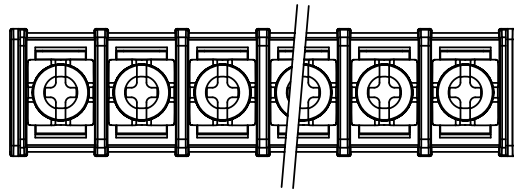

RECOMMENDED P.C.B LAYOUT  
TOP VIEW

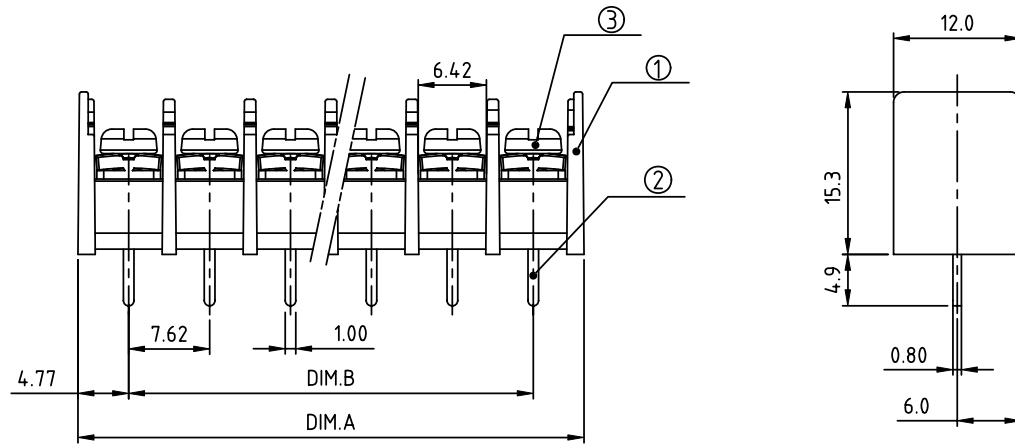

MATERIALS ELECTRICAL  
 RATED VOLTAGE & CURRENT: 300 V, 15 A  
 WITHSTAND VOLTAGE: AC 2000 V/Min  
 INSULATION RESISTANCE: 1000 M $\Omega$  OR MORE AT DC 500 V  
 OPERATING TEMPERATURE RANGE: -40 °C ~ +115 °C  
 SCREW TORQUE VALUE: 5.2 Lb-In.  
 WIRE RANGE: 14 ~ 22 AWG  
 1) HOUSING: THERMOPLASTIC, UL 94 V-0 BLACK  
 2) TERMINAL: BRASS, 0.8t  
 3) TERMINAL SCREWS: STEEL, M3


DIMENSION

Dim A	(N-1)×7.62+9.54
Dim B	(N-1)×7.62

N=Number of poles

Poles	Tolerance
2p-4p	±0.20
5p-10p	±0.30
11p-16p	±0.40
17p-20p	±0.50

PART NO.: YK 303xx 0 x 0 JOG

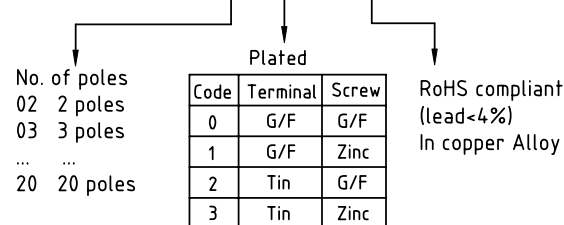

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection	product family TERMINAL BLOCK
ltr	ecn no	dr	date	tolerances unless otherwise specified	title TERMINAL BLOCK
				angles $\phi$ X°±1°	BARRIER TYPE
				scale	sheet 1 of 1 size A4
		dr	HANKE FENG	060914	FCI
		enr	HANKE FENG	060914	YK303xx0x0JOG
		chr	HANKE FENG	060914	CUSTOMER Drawing
		appd	SHI JUN	060914	type
sheet index	revision sheet	A	1		