
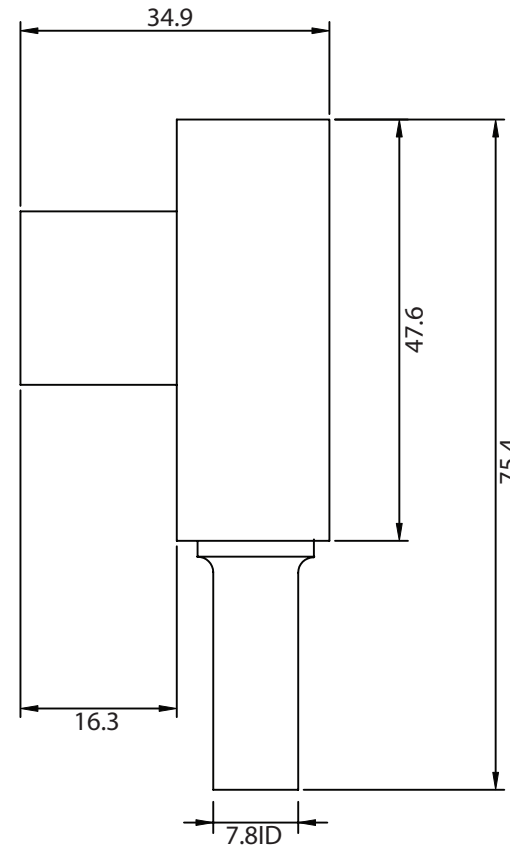


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP
C	Updated Specifications	01-19-09	LY

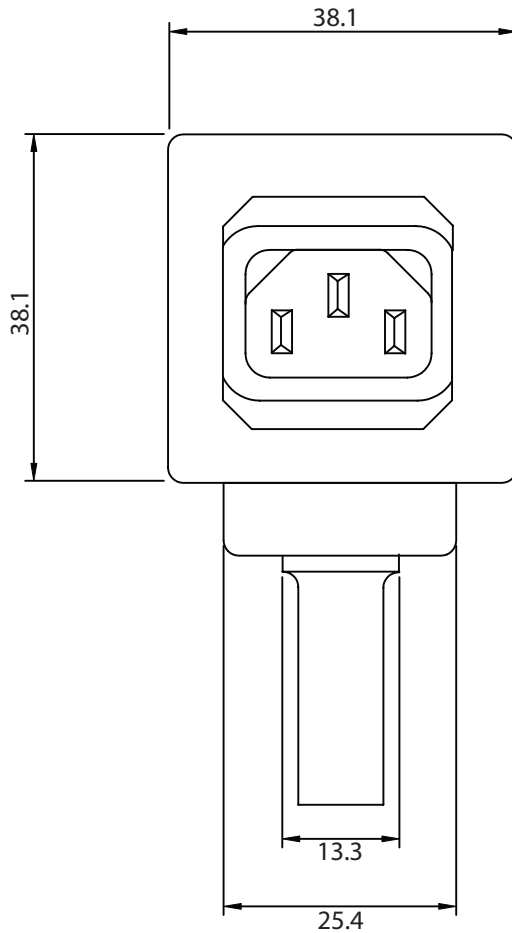

**NOTES:**

**MATERIAL:**

MOULDING: NYLON, FLAMMABILITY RATING U.L. 94V-0  
 CONTACTS: BRASS, NICKEL PLATED  
 RATING: 10A 250V AC  
 INSULATION RESISTANCE: >10,000 M OHM  
 CONTACT RESISTANCE: < 10m OHM  
 A.C. BREAKDOWN:  
 POLE-POLE: 5.2kV  
 POLE-ACCESSIBLE: 6kV  
 OPERATING TEMPERATURE: -40° C TO +70° C  
 APPROVALS: UL, CSA, VDE  
 FOR USE WITH 18 AWG CORDAGE  
 ADJUSTABLE - 4 POSITION CABLE ENTRY  
 RoHS COMPLIANT

**CONTROLLED**

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number:	711-00/00	RoHS Compliant
0-1	0.15	Description: REWIRABLE PLUG ASSEMBLY		
1-6	0.20			
6-18	0.30	UNIT: mm	REV. C	
18-50	0.50		Approved / Date	JH / 01-22-03
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	B.Zhang 01-22-03	01-22-03	JH / 01-22-03
250-500	1.20			