



P1

P2

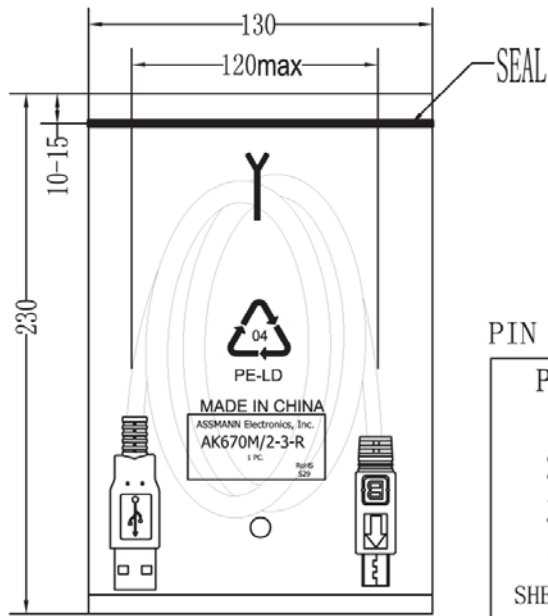

1PC/PE BAG

PIN ASSIGNMENT:

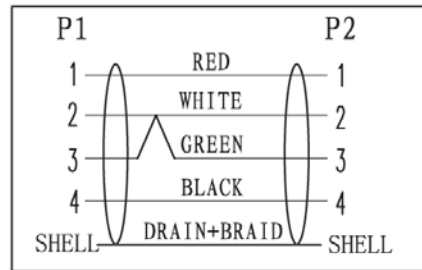

Material:

- Cable: USB2.0 Black UL2725 #28/1P+28#/2C+AEB
 - OD 3.8MM
 - White print
 - USB Cable E189529 AWM 2725 VW-1 30V 80°C 28AWG/1PR and 28AWG/2C

- P1 Connector: Mini USB 4P B/M plug
 - Solder type
 - Plastic Black

- P2 Connector: USB A Male
 - Shell: Nickel
 - Pin: G/F 4PCS type
 - Insulator color: White

- Outer Jacket: Black PVC-40P

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 2Ω (Max.)
- Insulation resistance: 10MΩ (Min.)
- Dielectric test: 300V DC

Unit: MM



Scale	1:1	Name			
TOLERANCE		Drawn	08.29.11	Chappell	
X.X	±0.40	Approved			
X.XX	±0.25				
X.XXX	±0.15				
Angle	±3°				
		ASSMANN			
		W&S/W components			
		Modification	Date	Name	

Item No.	AK670M/2-3
Title	USB 2.0 Cable A Male to Mini B Male - 4 Pin, Black, 3 Meters
Drawing No.	rev00
Replace	Sheet