


Thermofit<sup>®</sup> Molded Parts  
 Specification Control Drawing  
 Limited Distribution

Part Number : 202D953-X-08  
 Description : Boot, Straight

NOTES

- All dimensions are in  $\frac{\text{inches}}{\text{[millimeters]}}$
- Dimensions appearing in table are as follows:  
 a - As Supplied  
 b - After Unrestricted Recovery
- Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.

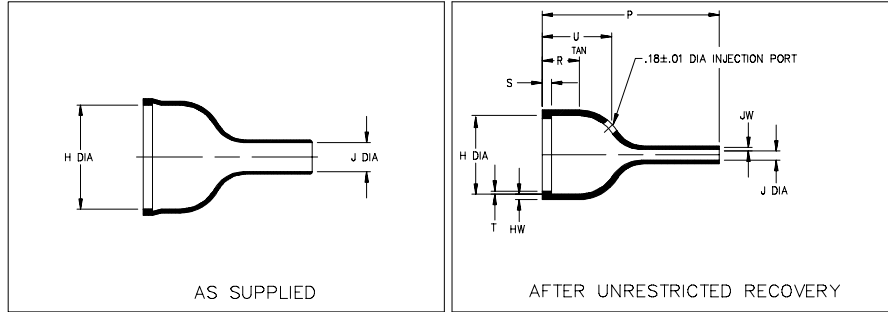

PART NUMBER	H		J		P ±10%	R Ref	S Ref	T Ref	U ±10%	HW ±20%	JW ±20%
	Min	Max	Min	Max							
	a	b	a	b							
202D953-X-08	1.35 [34,2]	1.02 [26,0]	.38 [9,6]	.12 [3,1]	1.97 [50,0]	.48 [12,2]	.12 [3,0]	.04 [1,0]	.90 [20,9]	.07 [1,8]	.045 [1,14]

**If this document is printed it becomes uncontrolled.  
 Check for the latest revision.**

**Raychem**

RAYCHEM CORPORATION  
 300 CONSTITUTION DRIVE  
 MENLO PARK, CALIFORNIA 94025

Revision : A  
 Date : 8/11/94


Part Number : 202D953-X-08  
 Description : Boot, Straight

Thermofit<sup>®</sup> Molded Parts  
 Specification Control Drawing  
 Limited Distribution

Part Number : 202D953-X-08  
 Description : Boot, Straight

COMPATABILITY CHART					
MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION
-25	Elastomer, Fluid Resistant	RT-1325	N/A		

ORDERING INFORMATION

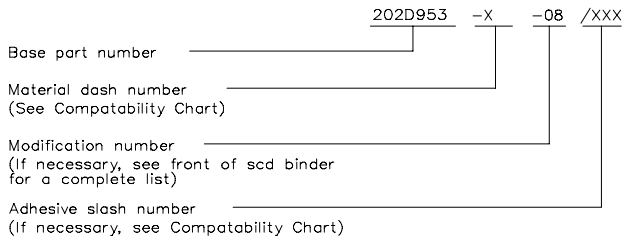

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR  
 NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

**Raychem**

RAYCHEM CORPORATION  
 300 CONSTITUTION DRIVE  
 MENLO PARK, CALIFORNIA 94025

Revision : A  
 Date : 8/11/94

Part Number : 202D953-X-08  
 Description : Boot, Straight