

SPECIFICATION

Part No. : **TG.09.0113W**

Product Name : 4G/3G/2G Cellular Hinged SMA (M) Mount Monopole

Feature : 700MHz to 3800MHz
LTE*/GSM/CDMA/HSPA/UMTS
700*/850/900/1700/1800/1900/2100/2300/3500/3700
Rotatable hinge design for optimal reception
*LTE 700MHz Band Compatible only when connected
directly on ground plane lengths of 60mm or more
RoHS Compliant



1. Introduction

The TG.09 Penta-band Cellular Hinged Rotatable SMA antenna is a high efficiency monopole antenna. Compared to other much larger antennas on the market, it has superior wide-band high efficiency characteristics. This antenna is used by many of the leading wireless device providers in the world marketplace.

The unique rotatable hinge design enables the user to rotate the antenna to the best angle for an optimal cellular signal reception. As the upper antenna element can move in any direction, it also reduces damage from impact force from any angle to the antenna, compared to traditional hinged right angle or fixed right angle designs or straight antennas.

The tiny dimensions of this antenna coupled with excellent RF performance and an aesthetic high end design feel make it the ideal cellular antenna for routers, vehicle tracking devices, telematics devices, remote monitoring systems, and POS devices.

The TG.09, as all monopole antennas works best connected directly to the ground-plane of the device main-board. Taoglas offers support services to characterize antenna efficiency on your individual device ground-plane.

The TG.09 antenna also supports LTE 700MHz band applications when it is directly connected to ground-planes with lengths above 60mm.

Please contact Taoglas regional support center first if you wish to do PTCRB or network approvals with this antenna attached to your device, so we can check RF integration is correct and do a pre-test first to ensure optimized passive and active performance and a smooth and quick certification approval process.

This antenna also comes in a black housing version. TG.09.0113

2. Specification

| ELECTRICAL | | | | | | | | | | |
|------------------------------|----------------------------|-----------------|-----------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Communication System | 4G/3G/2G Cellular | | | | | | | | | |
| | 700 LTE | AMPS | GSM | DCS | PCS | UMTS | 2300 LTE | 2700 LTE | 3500 LTE | 3700 LTE |
| Frequency (MHz) | 703 ~ 803 | 824 ~ 896 | 880 ~ 960 | 1710 ~ 1880 | 1850 ~ 1990 | 1710 ~ 2170 | 2300 ~ 2400 | 2490 ~ 2690 | 3400 ~ 3600 | 3600 ~ 3800 |
| Efficiency (free space)* | 18% | 22% | 22% | 25% | 30% | 30% | 17% | 32% | 28% | 43% |
| Gain (dBi, free space)* | -3.0 | -2.6 | -3.0 | 0.9 | 0.9 | 0.9 | -1.3 | 1.1 | 1.8 | 3.1 |
| Efficiency (mounted on PCB)* | 52% | 58% | 57% | 61% | 58% | 54% | 31% | 59% | 36% | 37% |
| Gain (dBi, mounted on PCB)* | 0.8 | 1.7 | 1.8 | 3.4 | 3.4 | 3.4 | 2.3 | 3.7 | 4.3 | 2.6 |
| Impedance | 50Ω | | | | | | | | | |
| Polarization | Linear | | | | | | | | | |
| Radiation Pattern | Omnidirectional | | | | | | | | | |
| Input Power | 10W | | | | | | | | | |
| MECHANICAL | | | | | | | | | | |
| Antenna Length | 72 ± 1.5 mm | | | | | | | | | |
| Antenna Diameter | 10 ± 0.3 mm | | | | | | | | | |
| Casing | POM | | | | | | | | | |
| Connector | SMA Male (Brass) | | | | | | | | | |
| Weight | 8g | | | | | | | | | |
| ENVIRONMENTAL | | | | | | | | | | |
| Temperature Range | -40°C to 85°C | | | | | | | | | |
| Storage Temperature | -40°C ~ +85°C | | | | | | | | | |
| Humidity | Non-condensing 65°C 95% RH | | | | | | | | | |

* Average efficiency and peak gain of antenna sitting 180° in Free Space and on 150*90mm ground plane at the side of the PCB. Please refer to section 3 for testing detail.


3. Antenna Characteristics

3.1 Test Setup


The TG.09 was measured and tested in four different environments

- a. Free space
- b. On the edge of a 150*90mm ground plane - common size for IoT devices. TG.09 is mounted on the 90mm edge for testing.
- c. In the center of a 300*300mm ground plane – simulate the effect of mounting in the center of a big ground plane.
- d. On the edge of a 300*300mm ground plane - simulates the effect of mounting TG.09 on top of a large gateway/router.

Straight Position

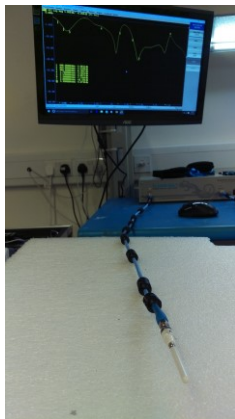


Free Space

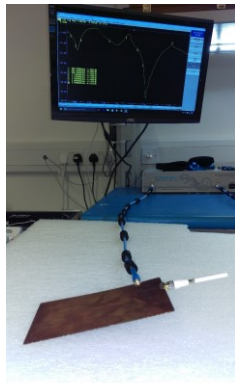

150mm x 90mm
Ground Plane




300mm x 300mm
Ground Plane Edge

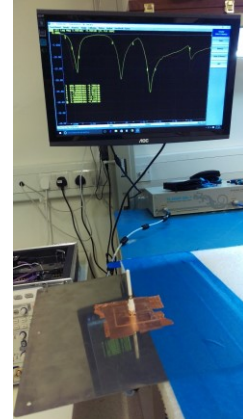

300mm x 300mm
Ground Pane Center


Antenna in 90° Bend Position

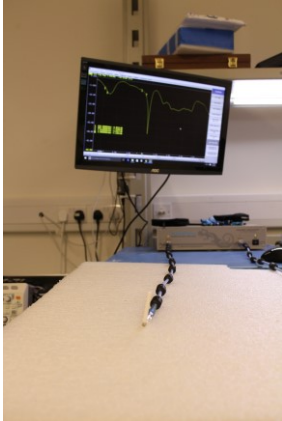


Free Space





150mm x 90mm
Ground Plane

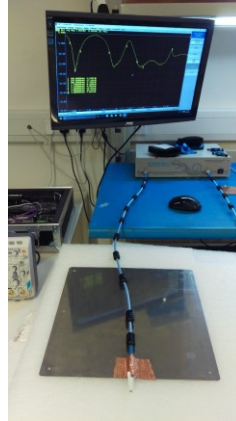

300mm x 300mm
Ground Plane Edge


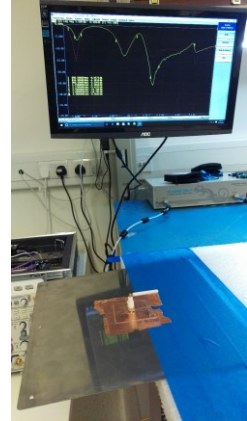


300mm x 300mm
Ground Plane Center

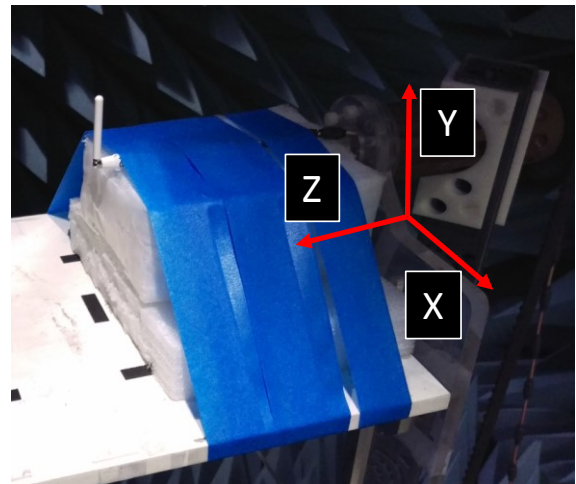
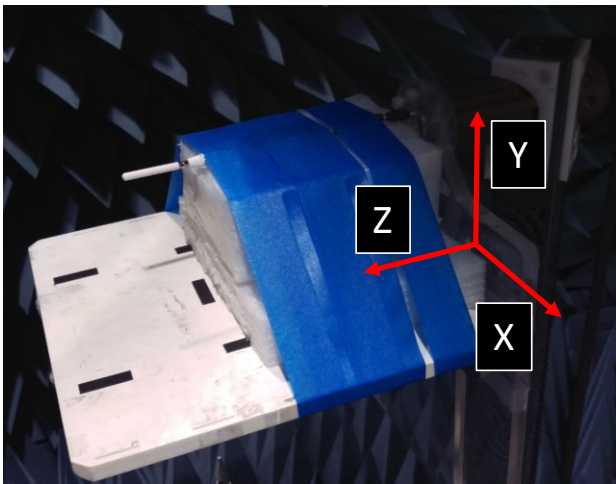


Chamber Setup



3.2 Return Loss

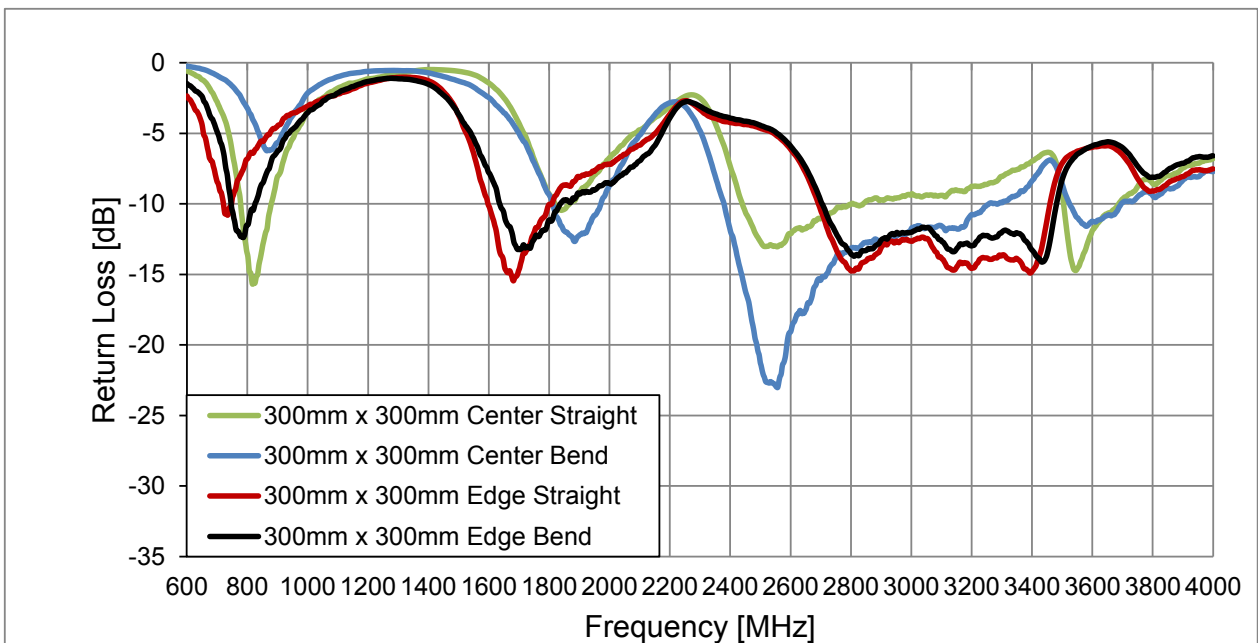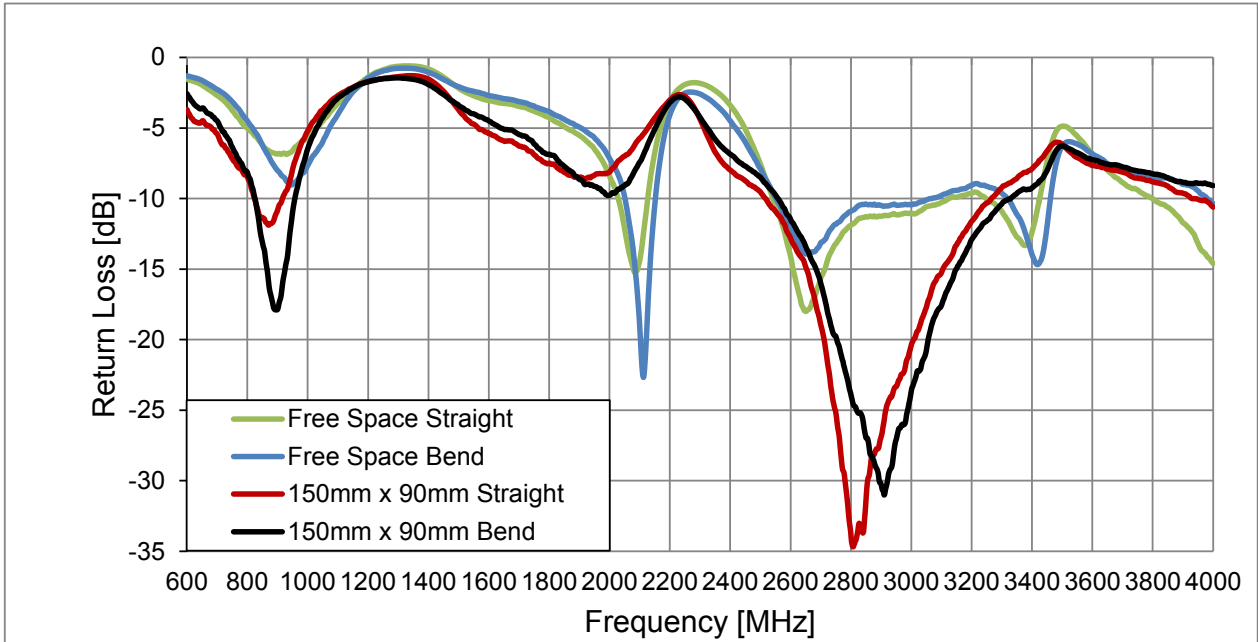



3.3 VSWR

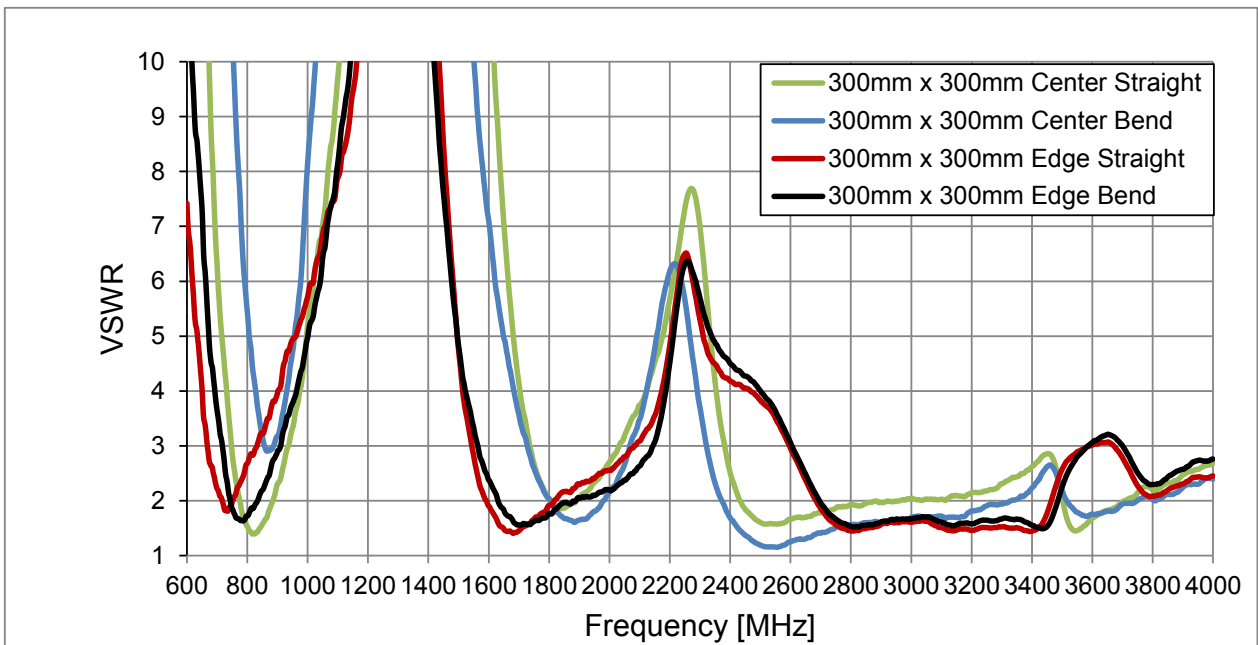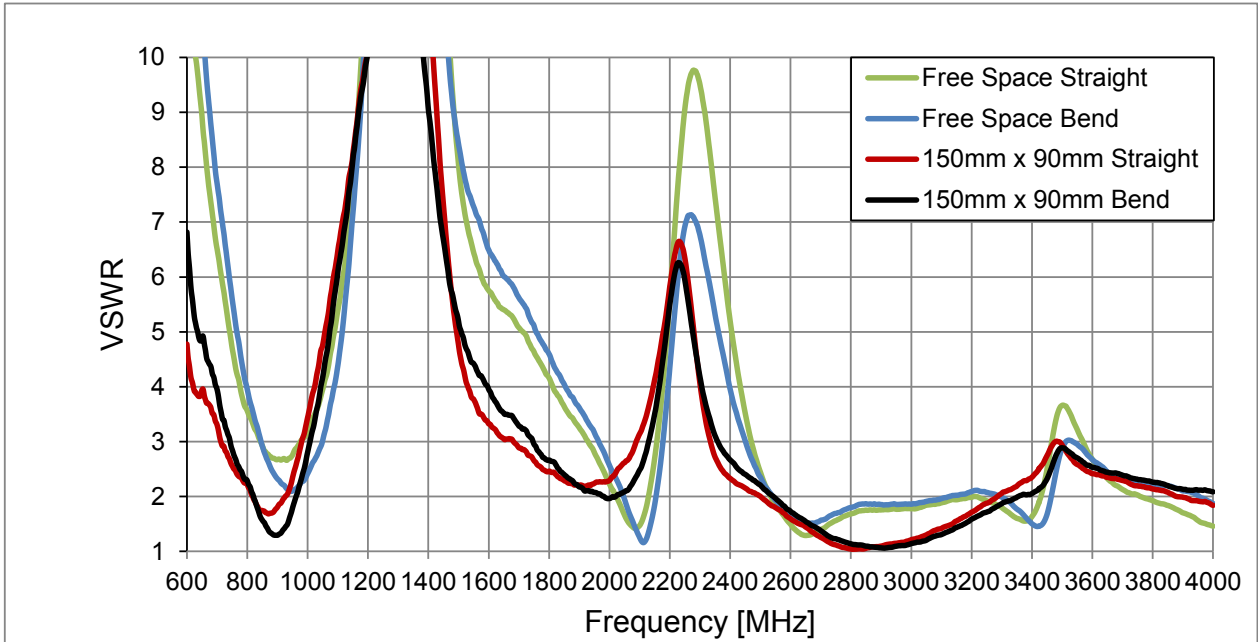



3.4 Efficiency

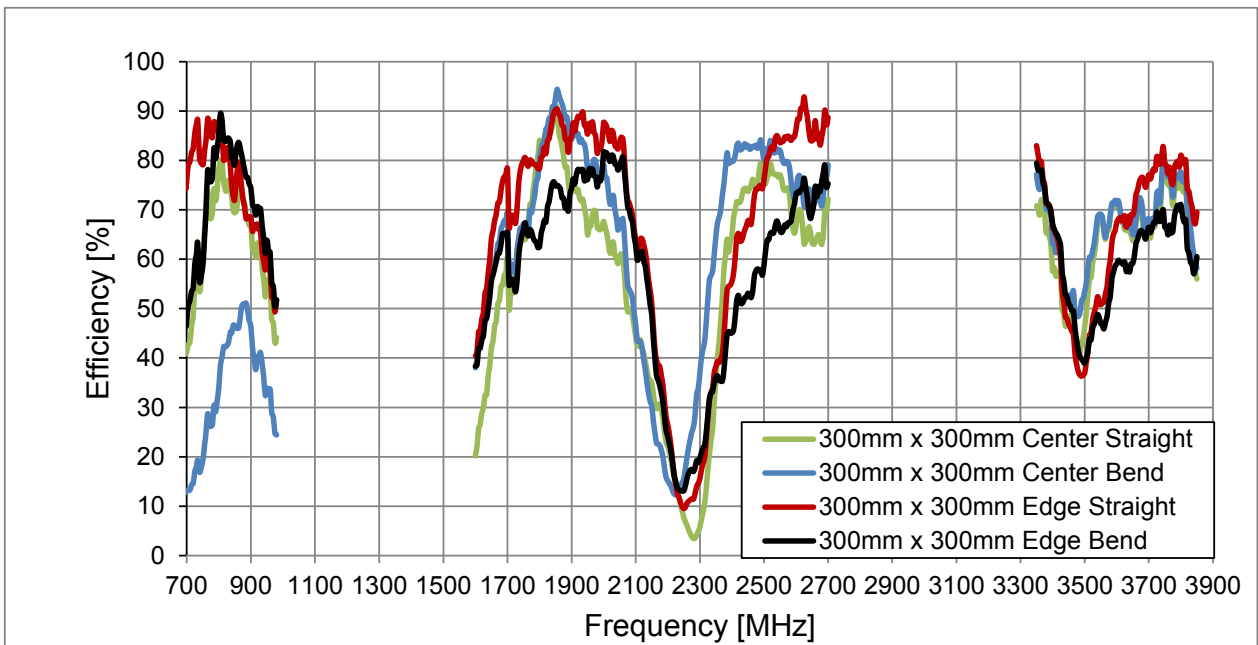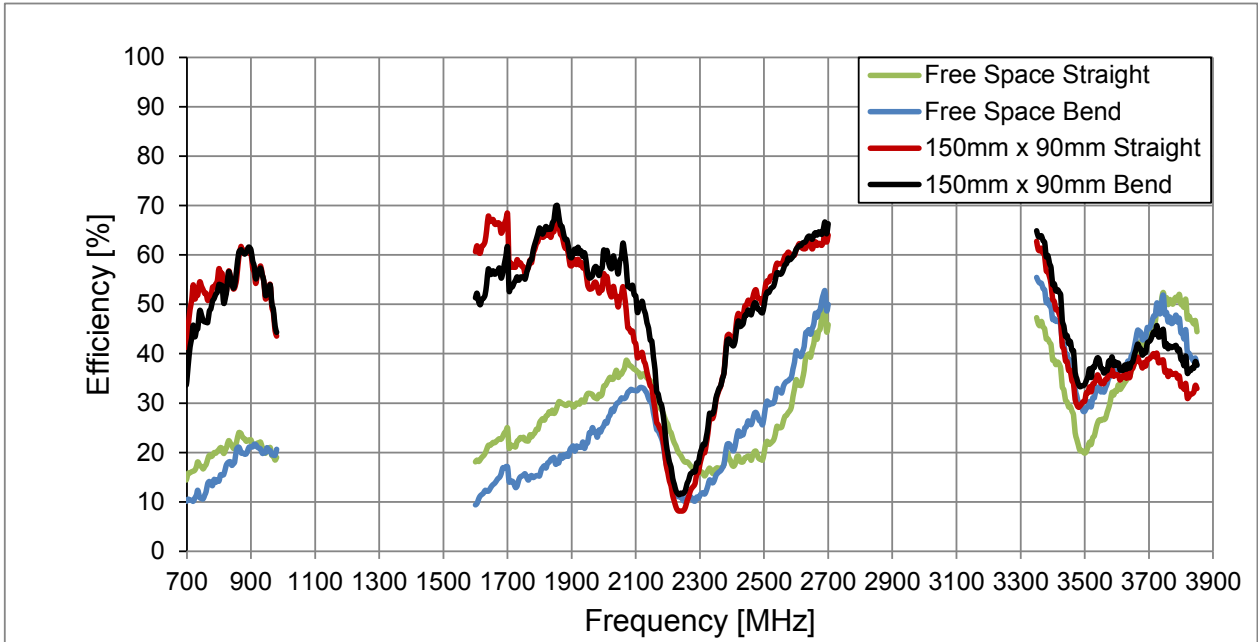

3.5 Peak Gain

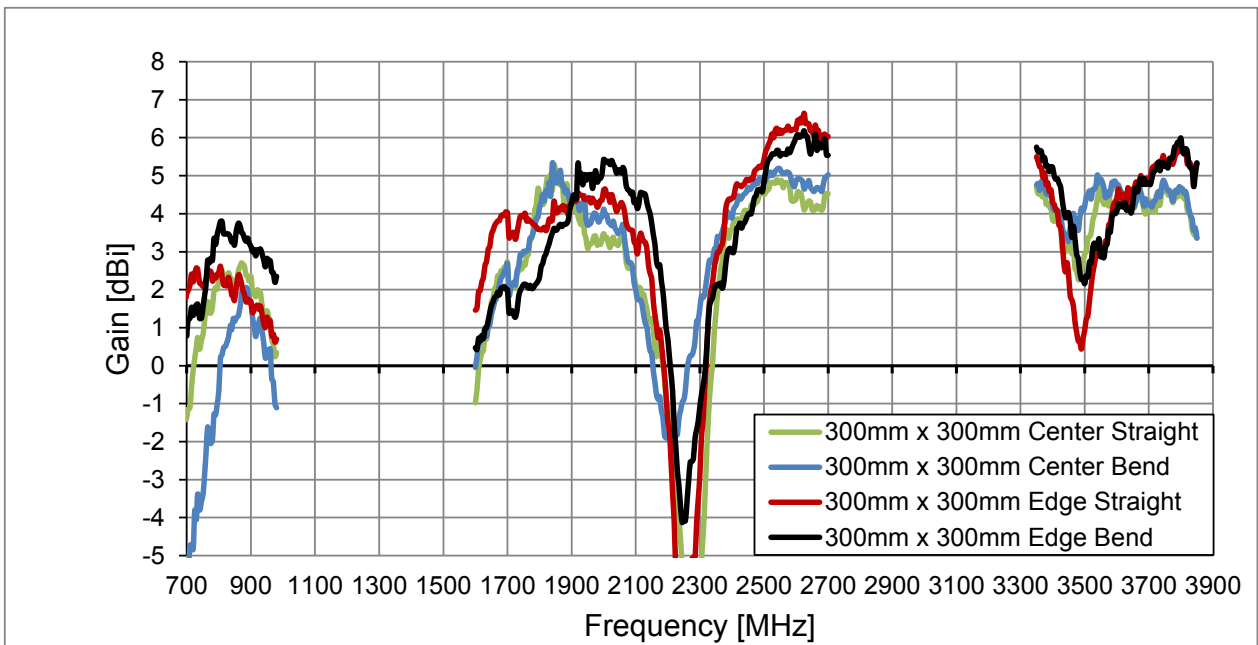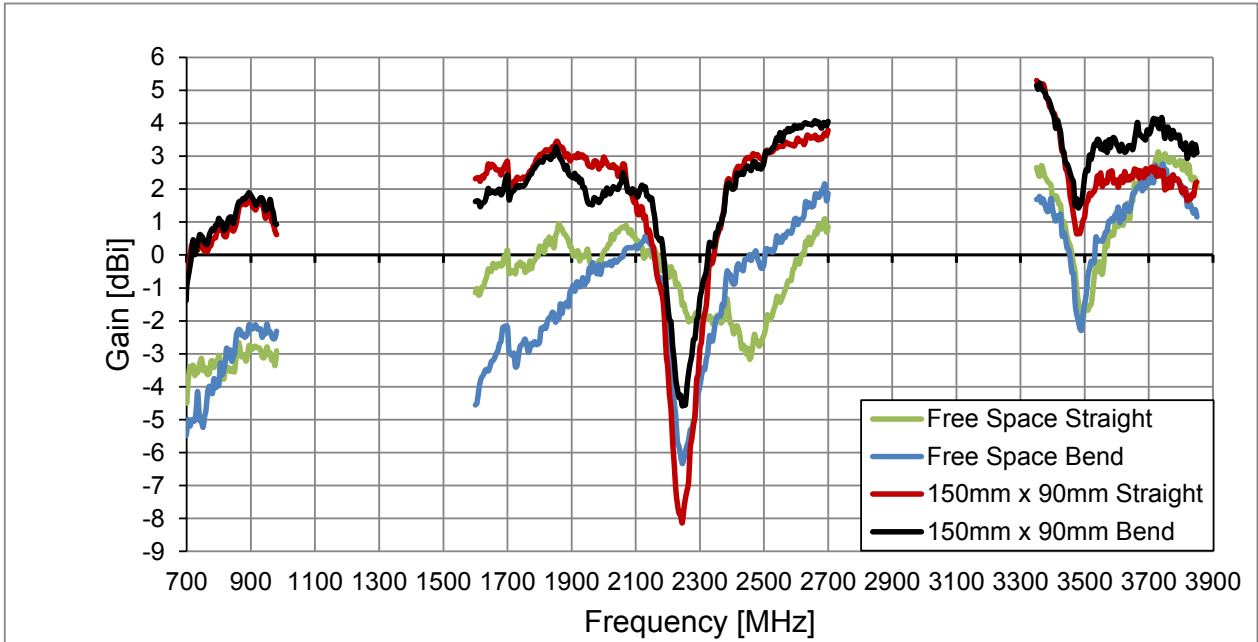


3.6 Average Gain

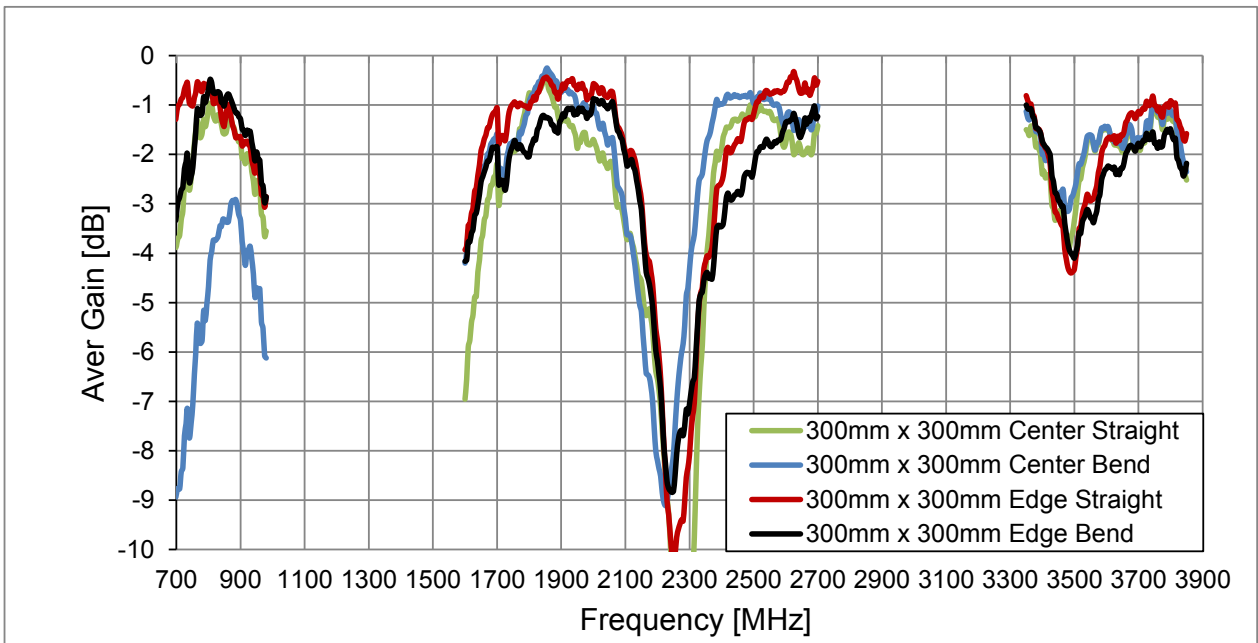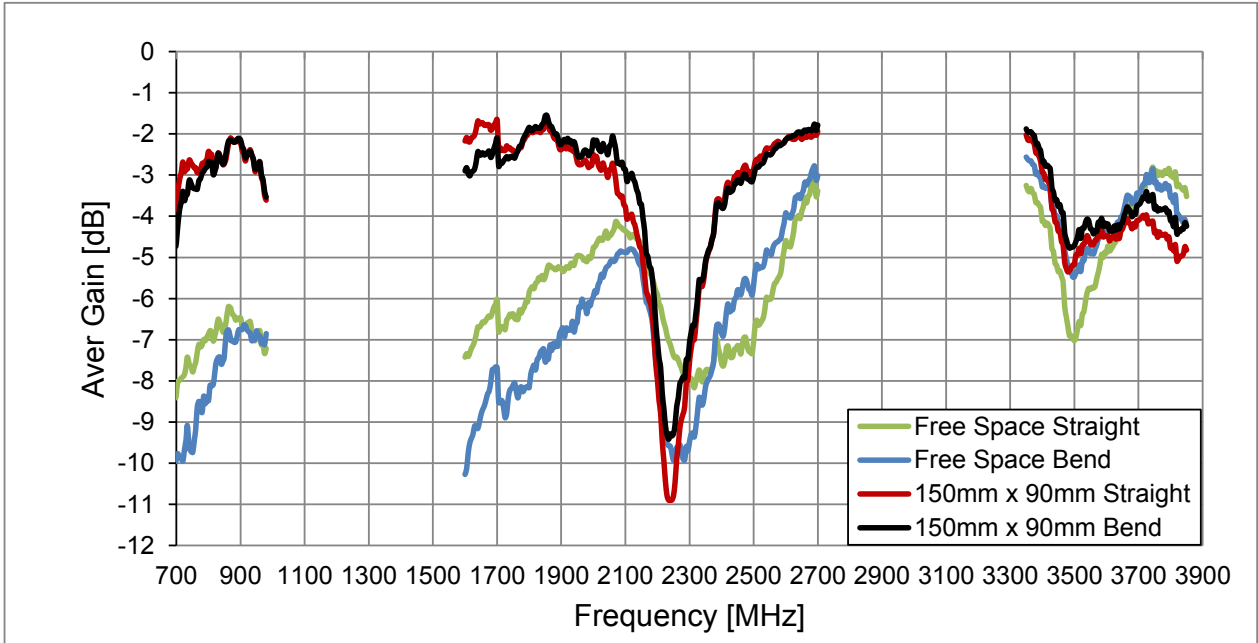


4. Radiation Patterns


4.1 TG.09 in Free Space – Straight

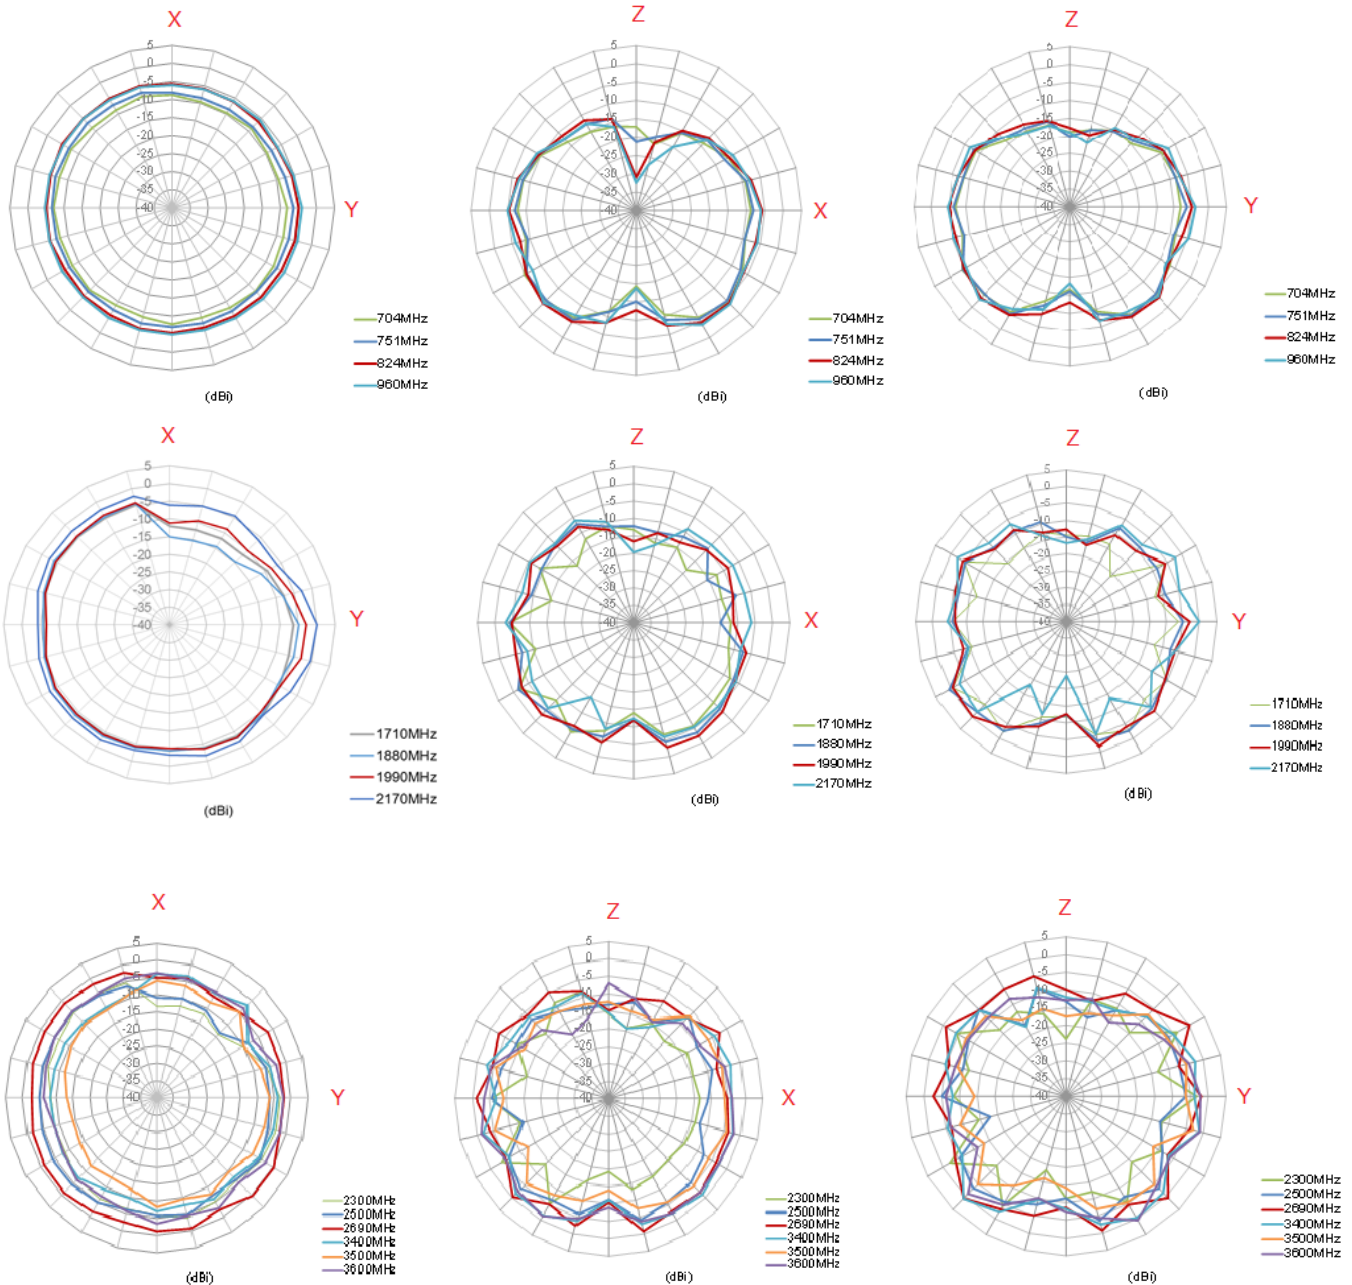


4.2 TG.09 in Free Space – 90°

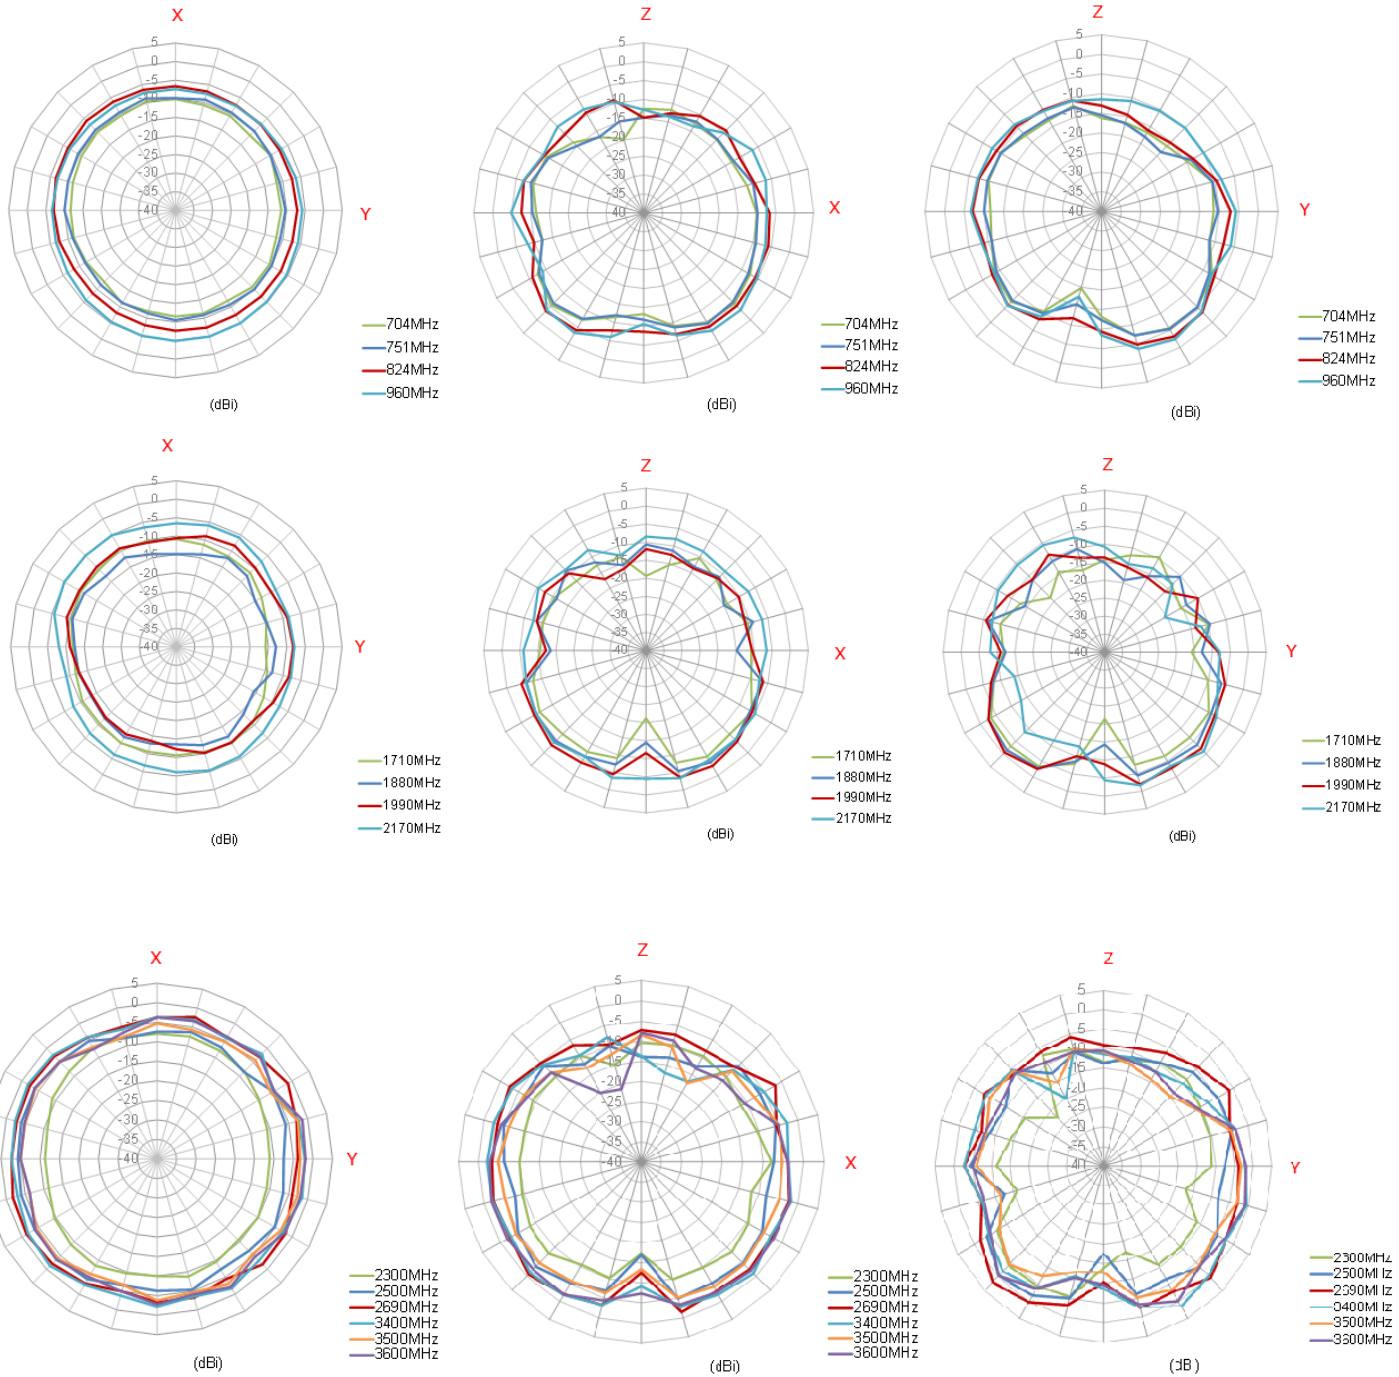


4.3 TG.09 on 150*90mm Ground Plane – Straight

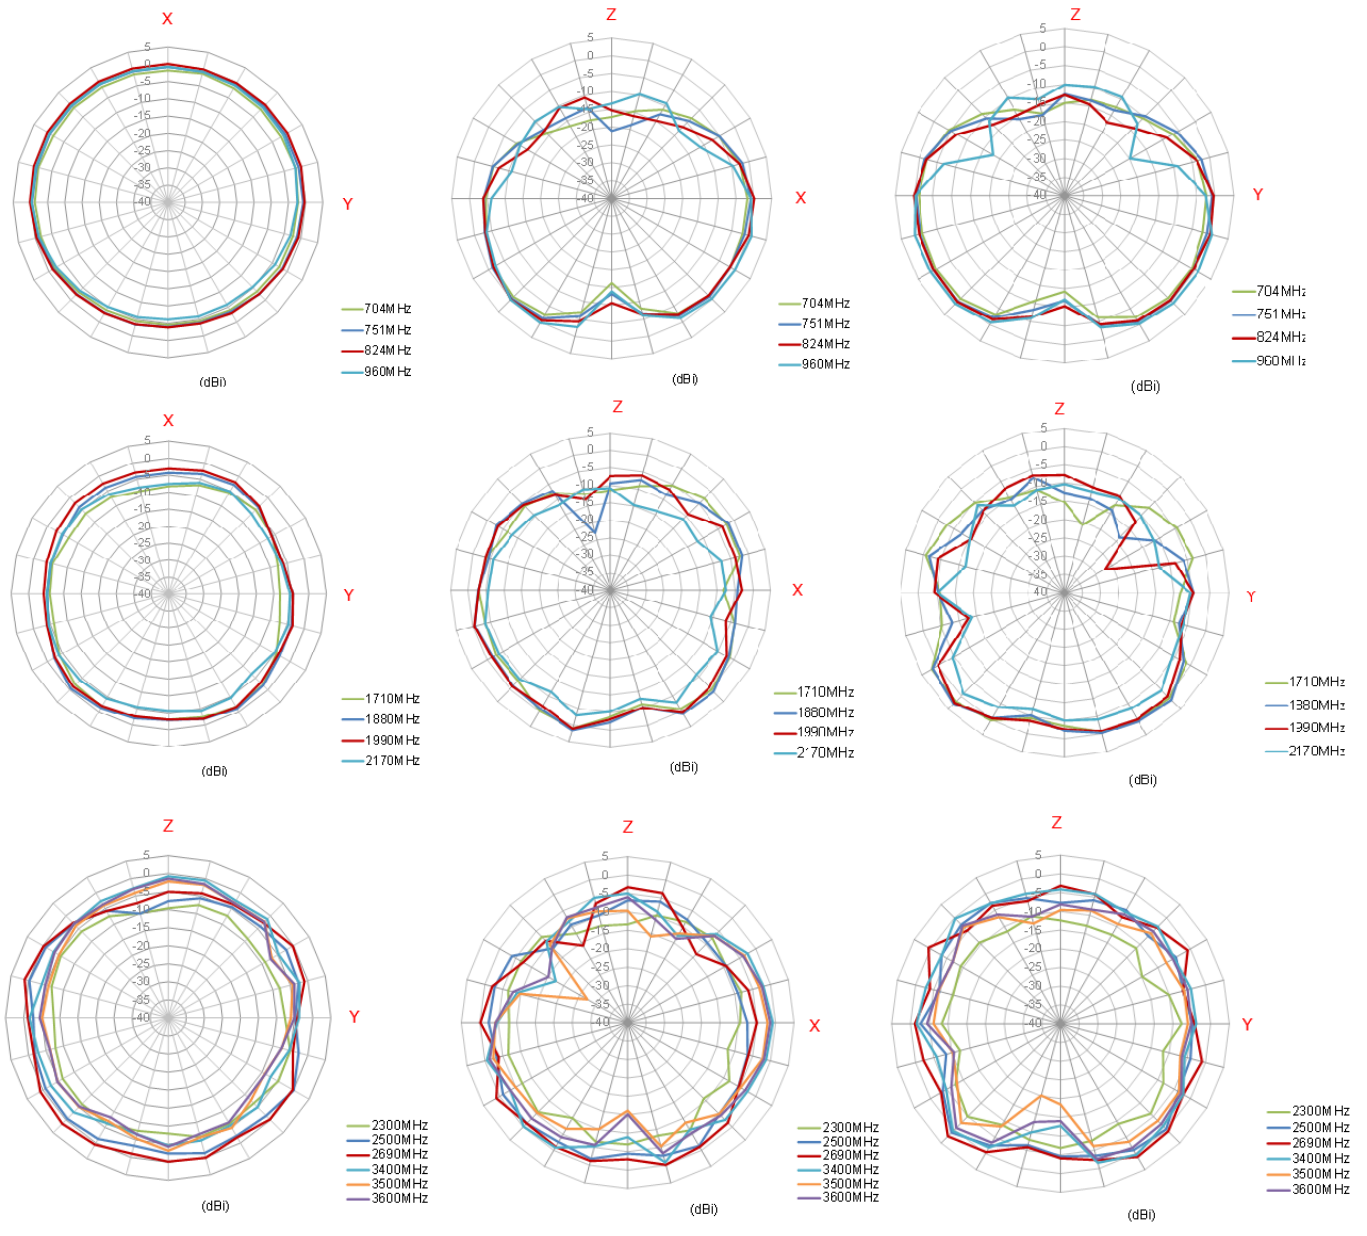


4.4 TG.09 on 150*90mm Ground Plane – 90°

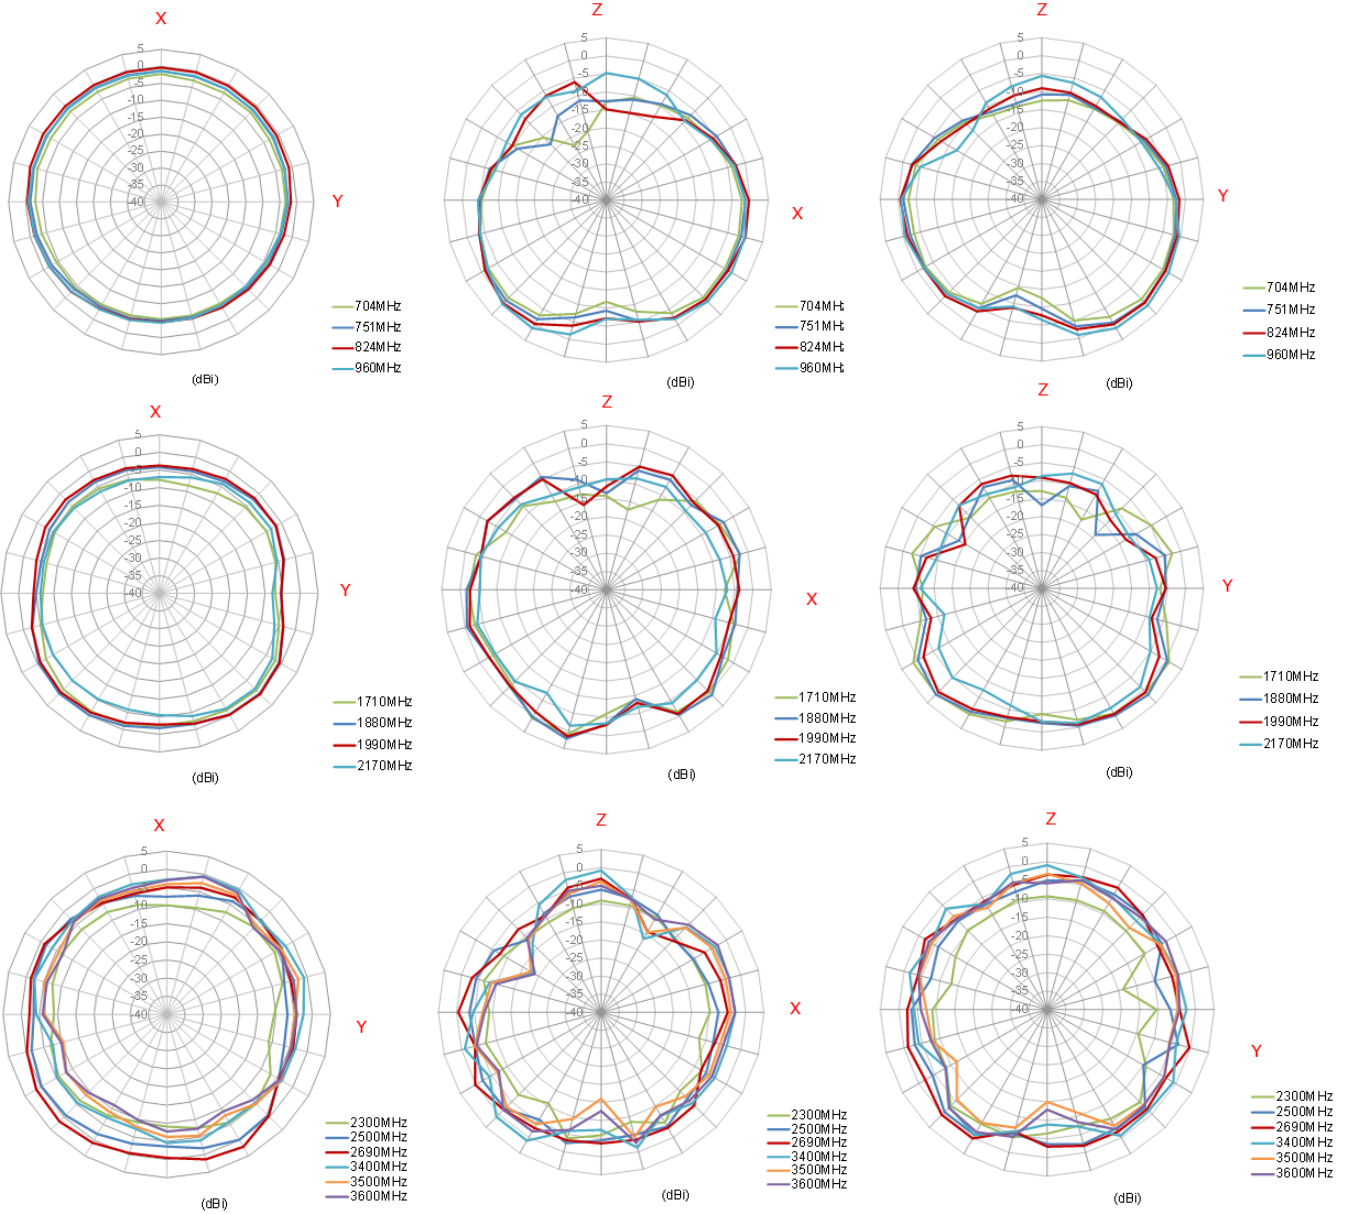


4.5 TG.09 on 300*300mm Ground Plane Centre – Straight

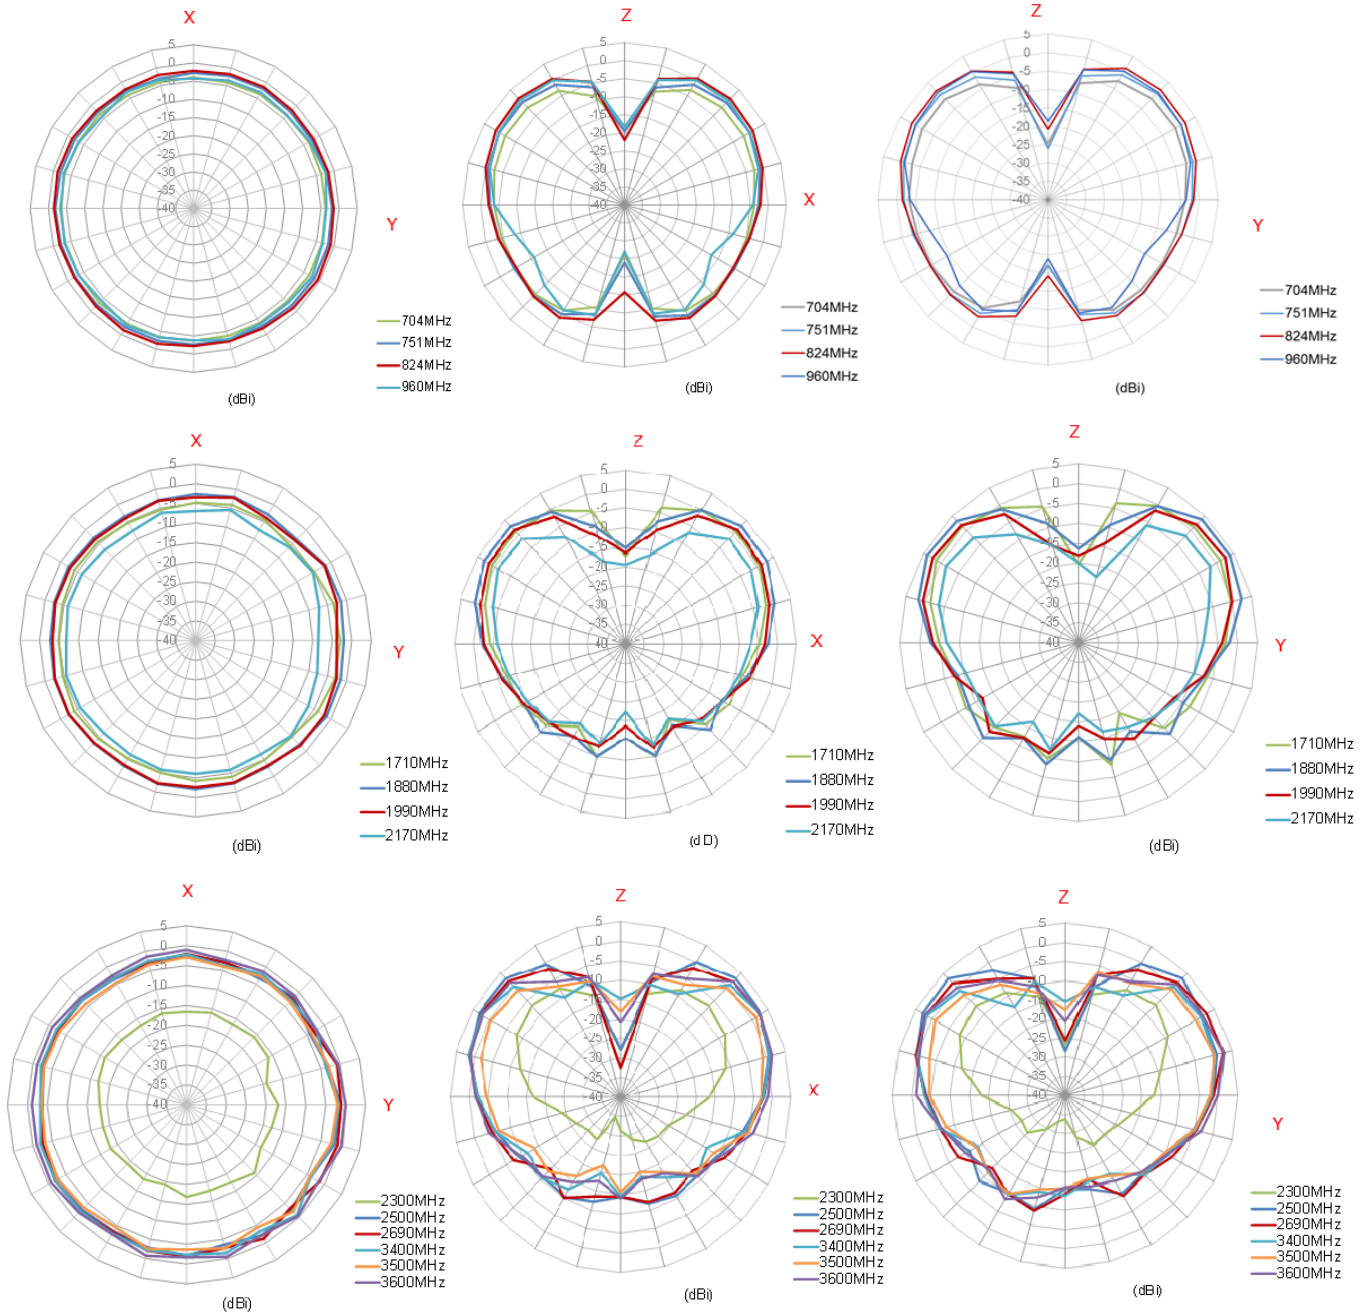


4.6 TG.09 on 300*300mm Ground Plane Centre – 90°

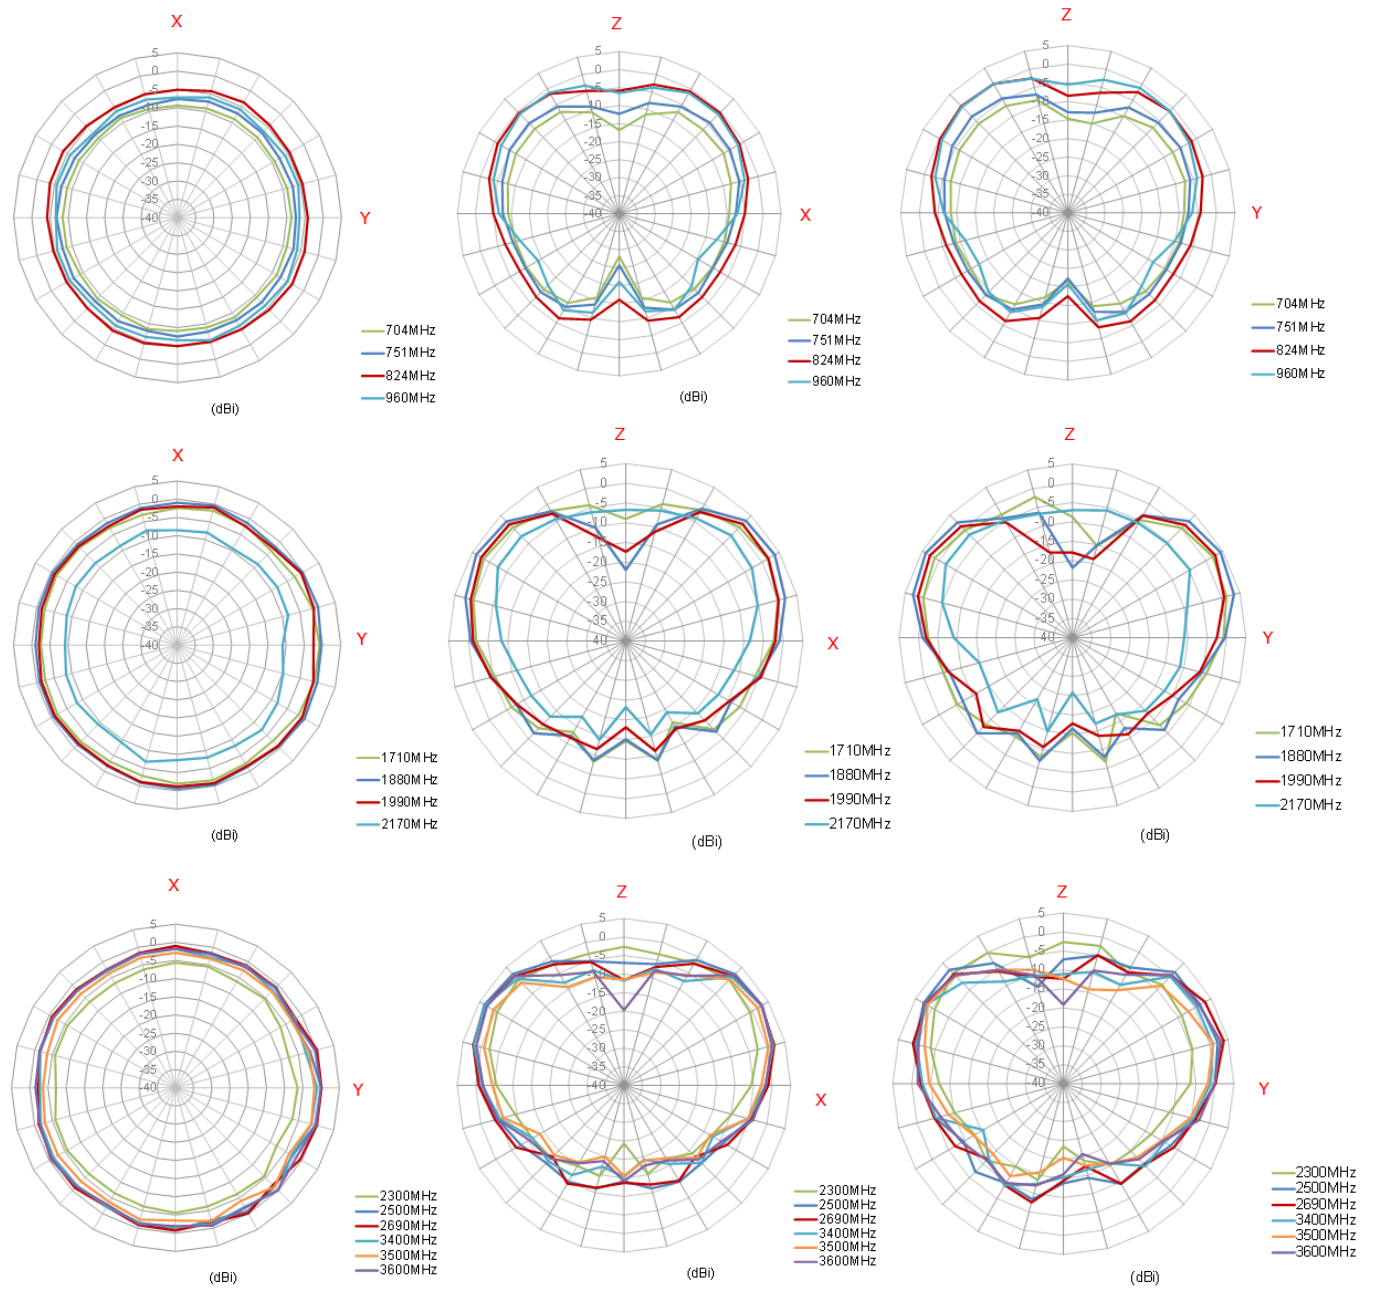

4.7 TG.09 on 300*300mm Ground Plane Edge – Straight

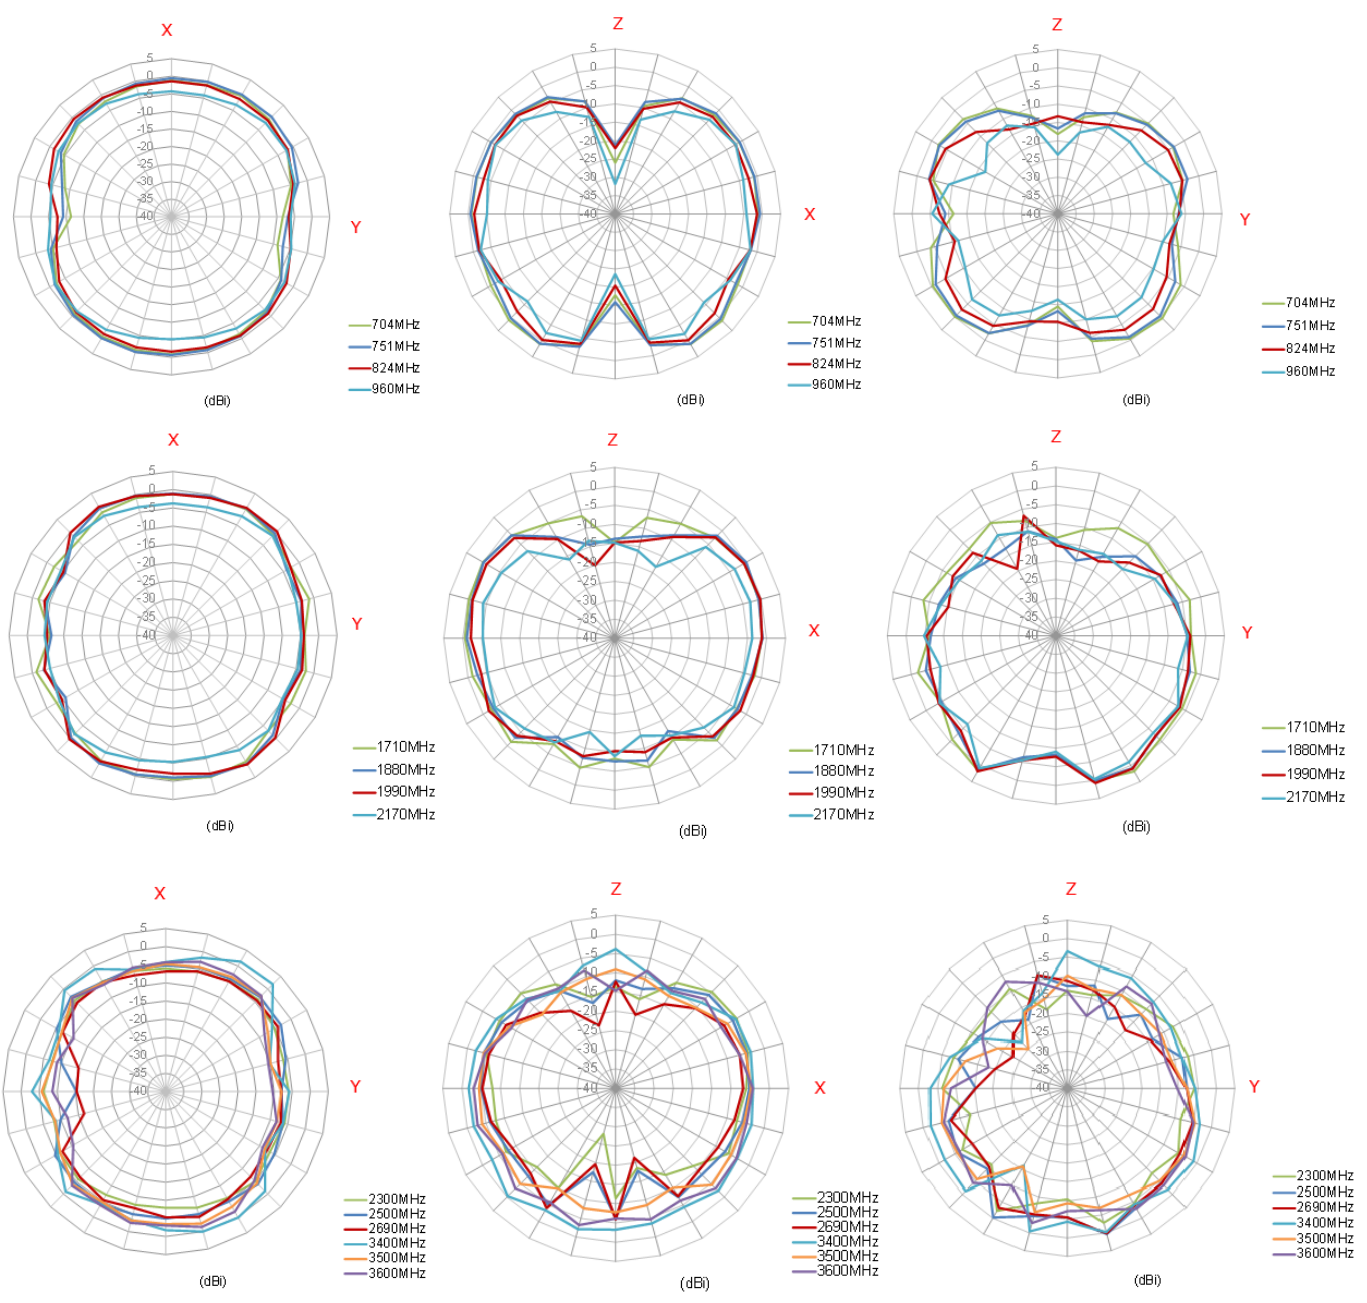


4.8 TG.09 on 300*300mm Ground Plane Edge – 90°

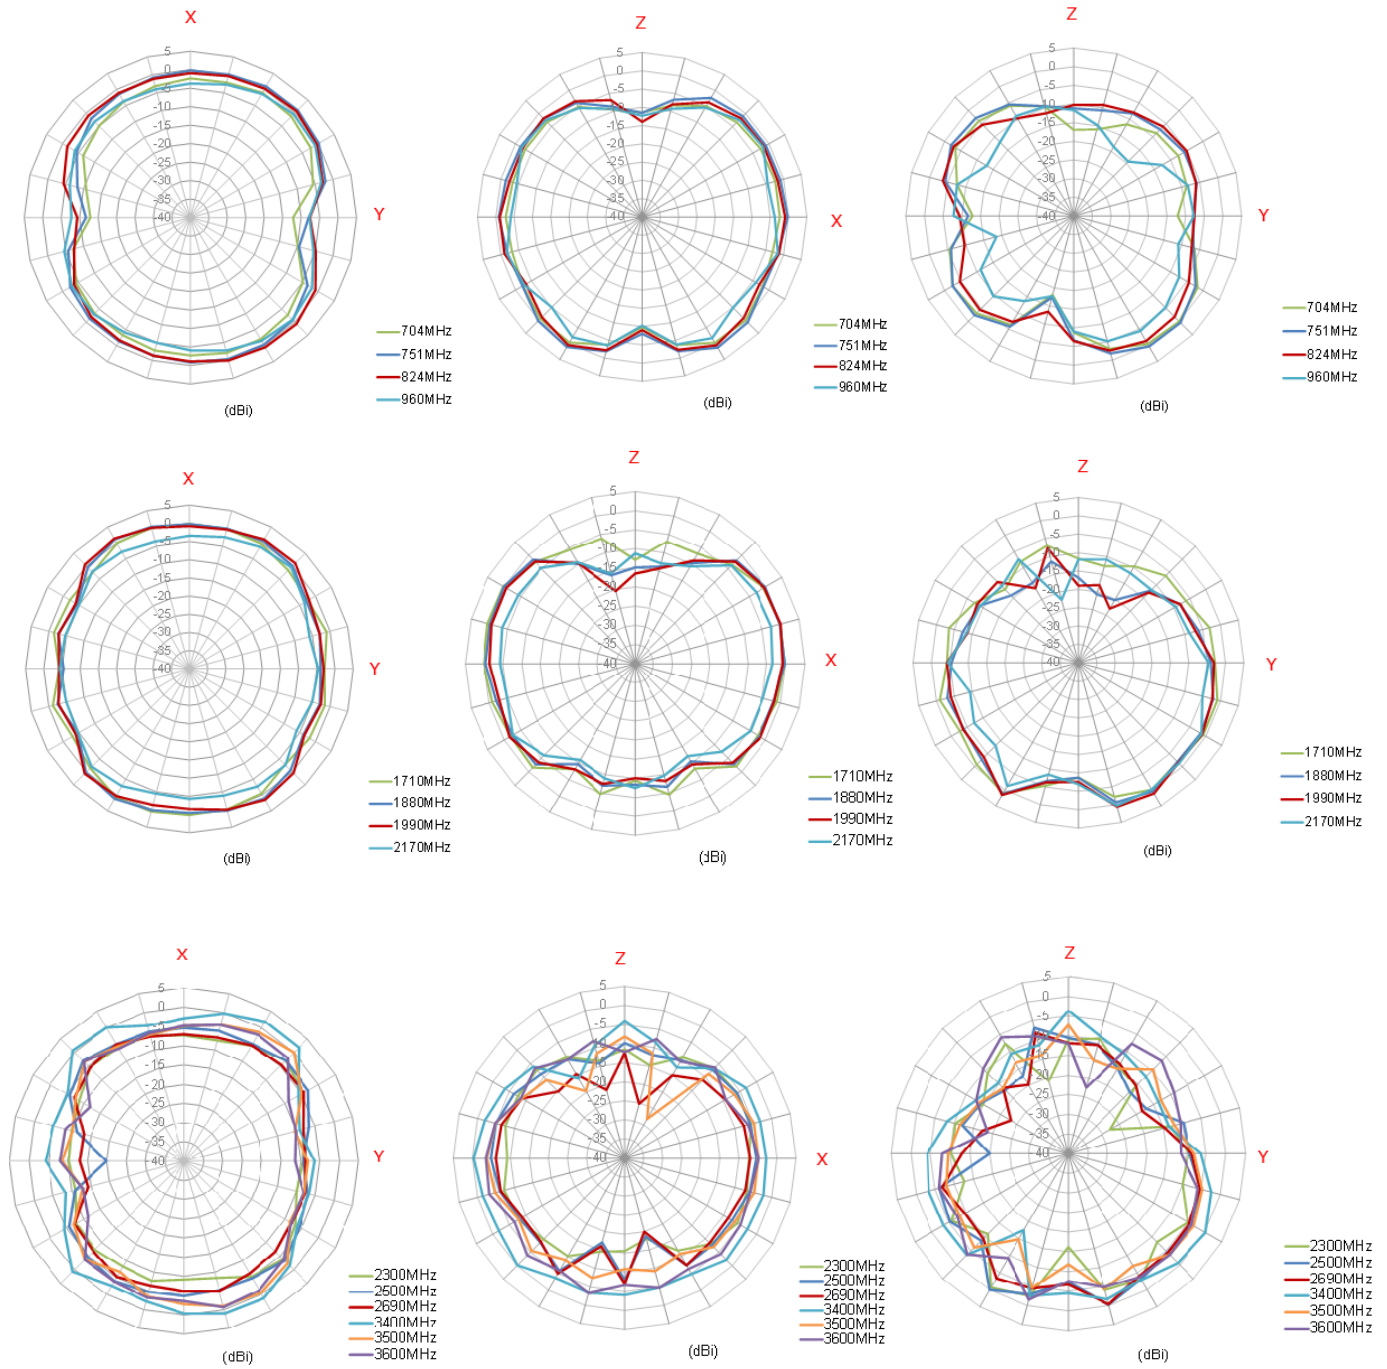


5. 3D Radiated Pattern


5.1 Free Space – Straight

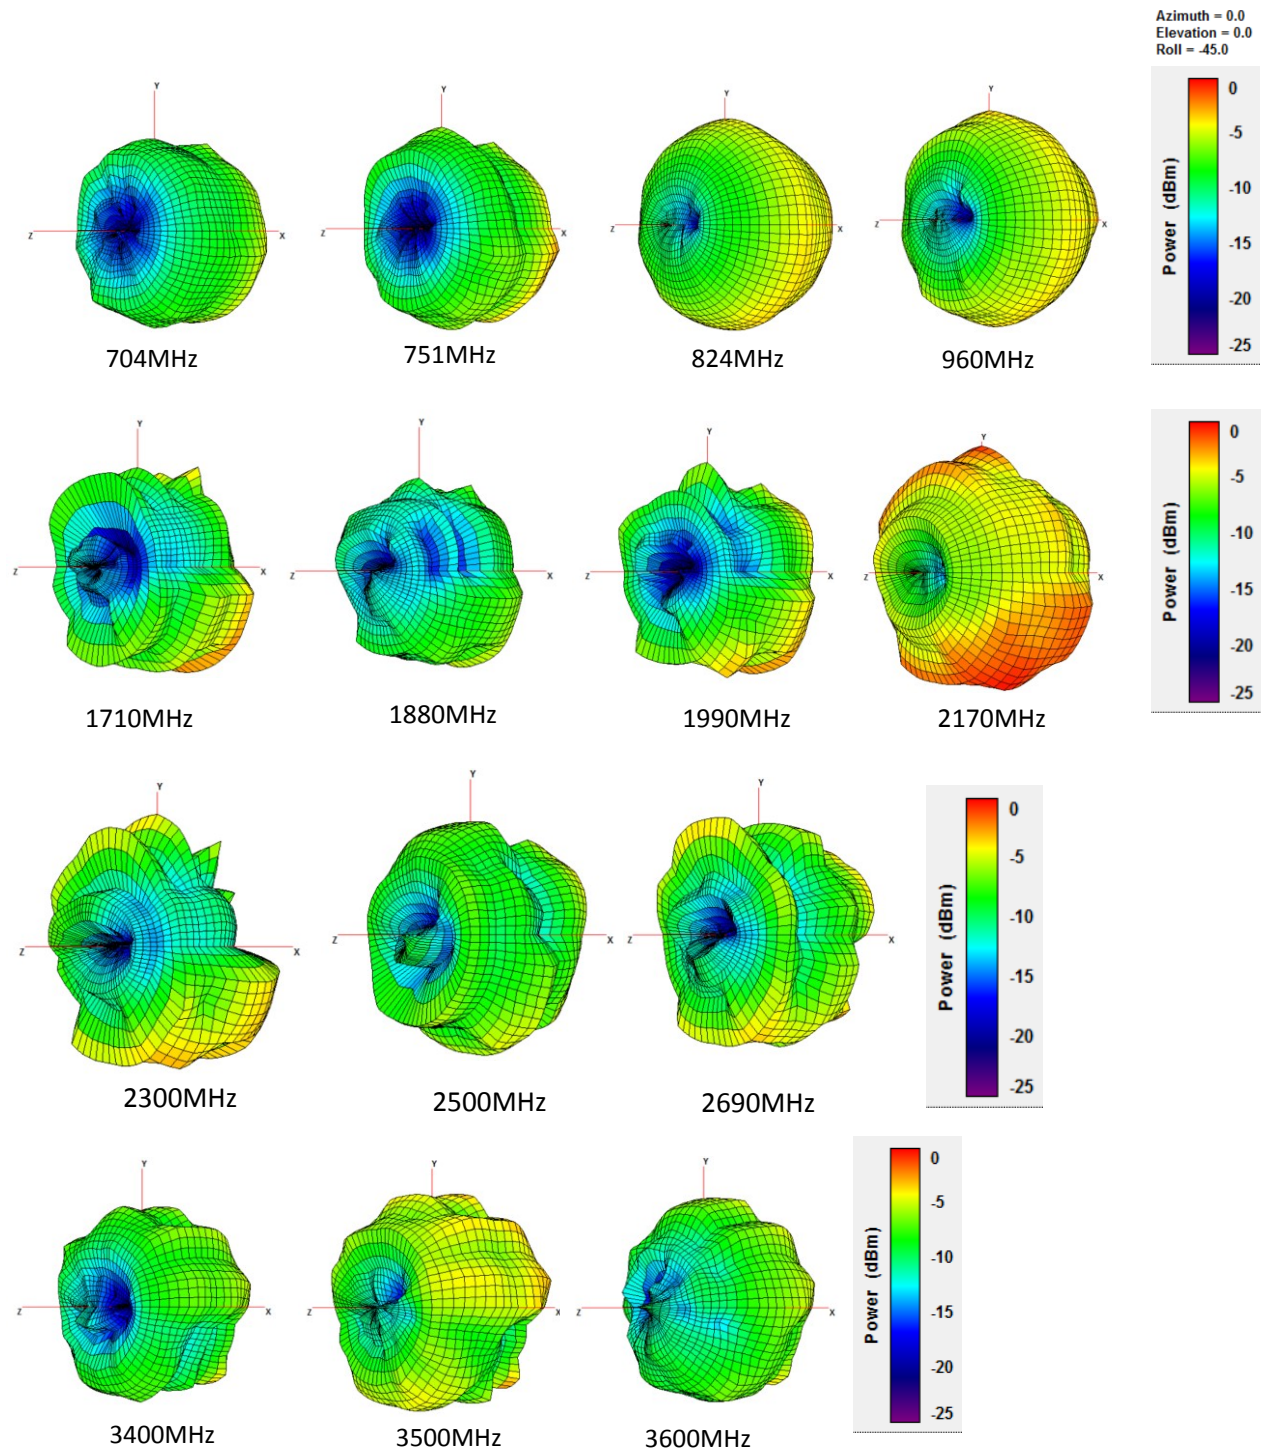


5.2 Free Space – 90°

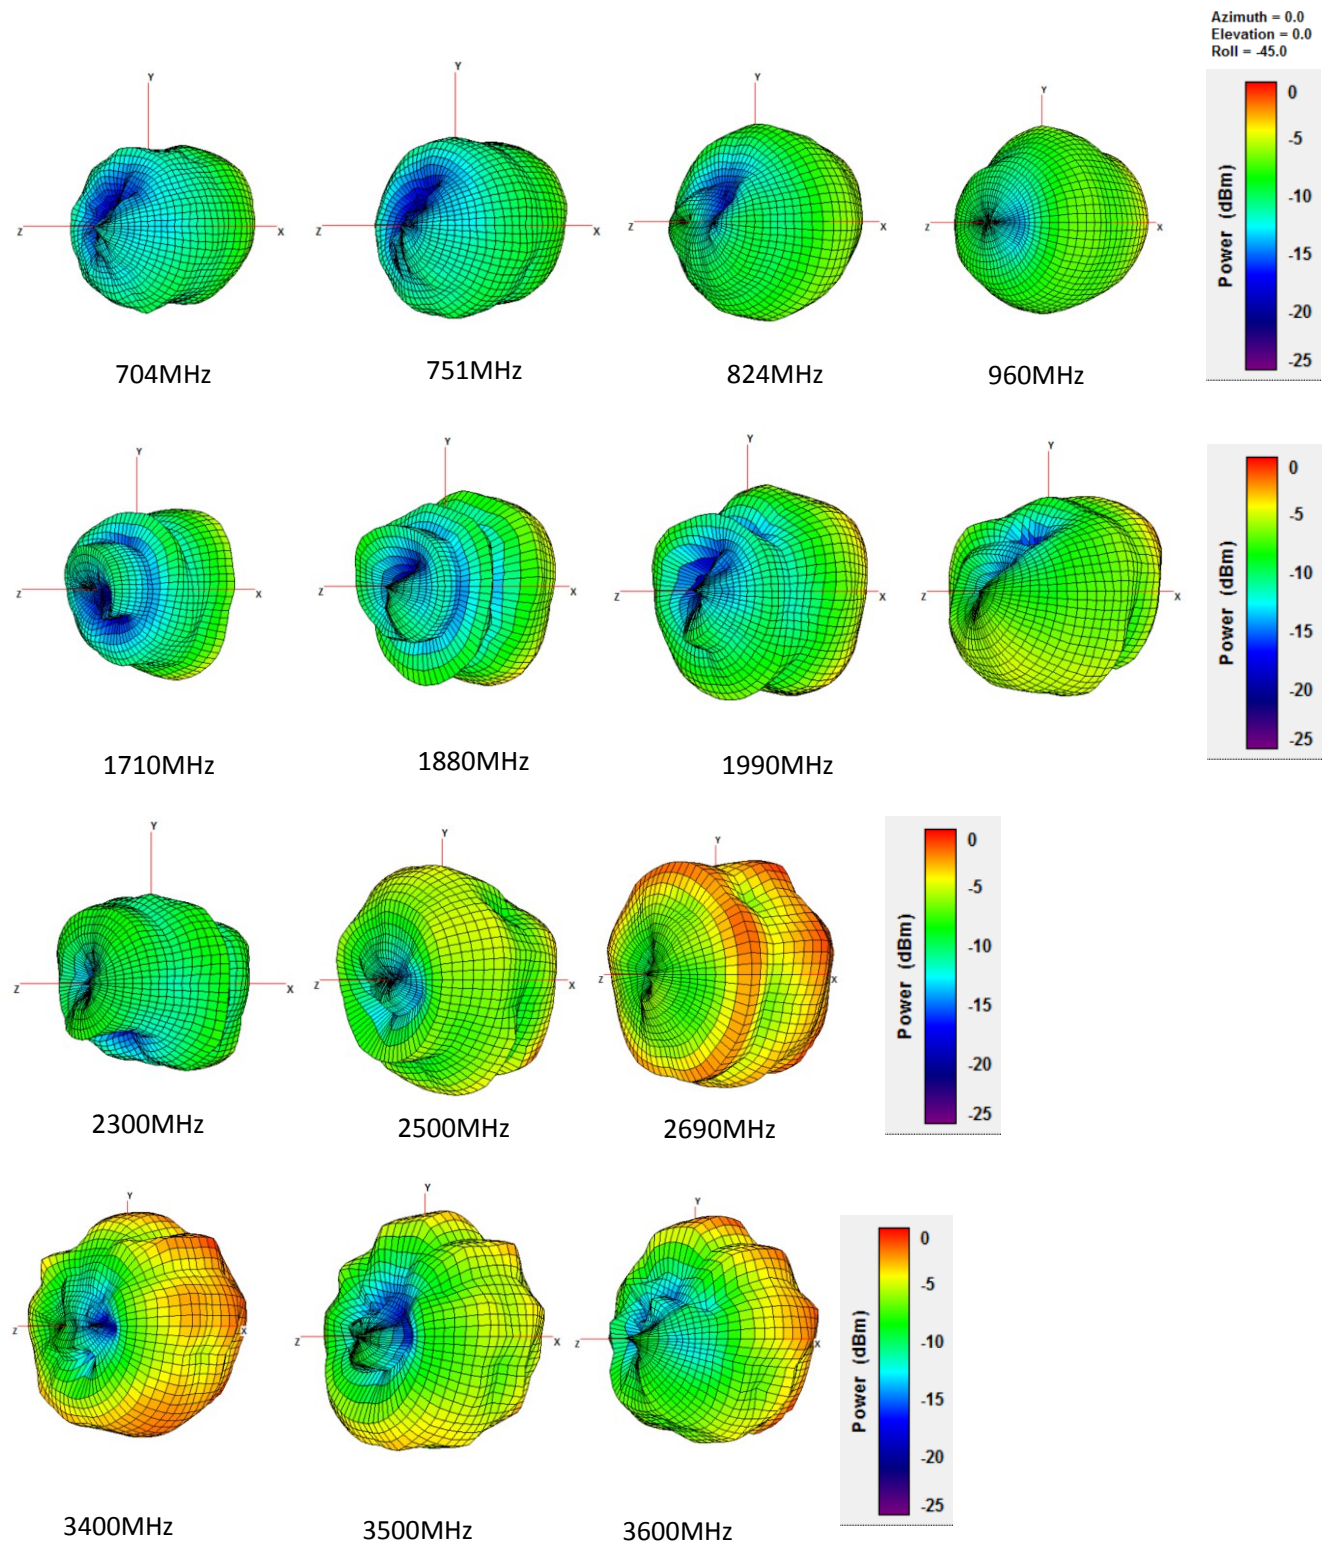


5.3 150*90mm Ground Plane – Straight

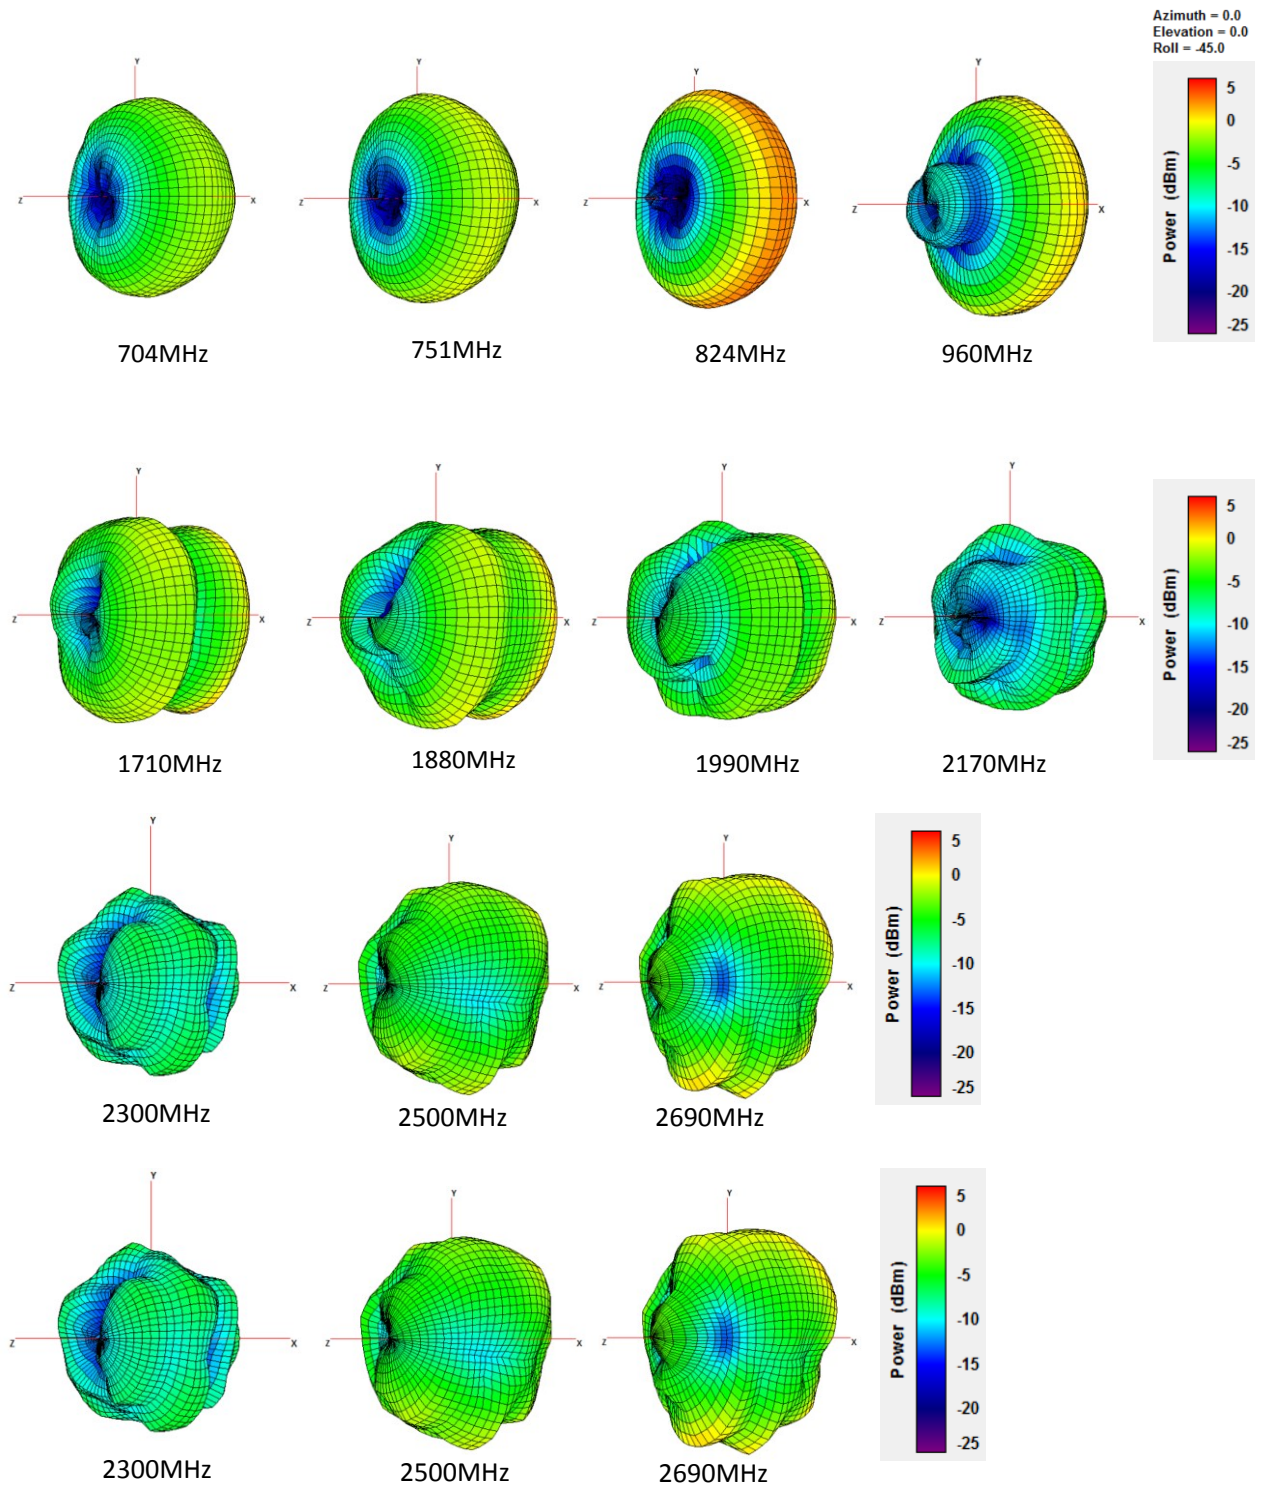


5.4 150*90mm Ground Plane – 90°

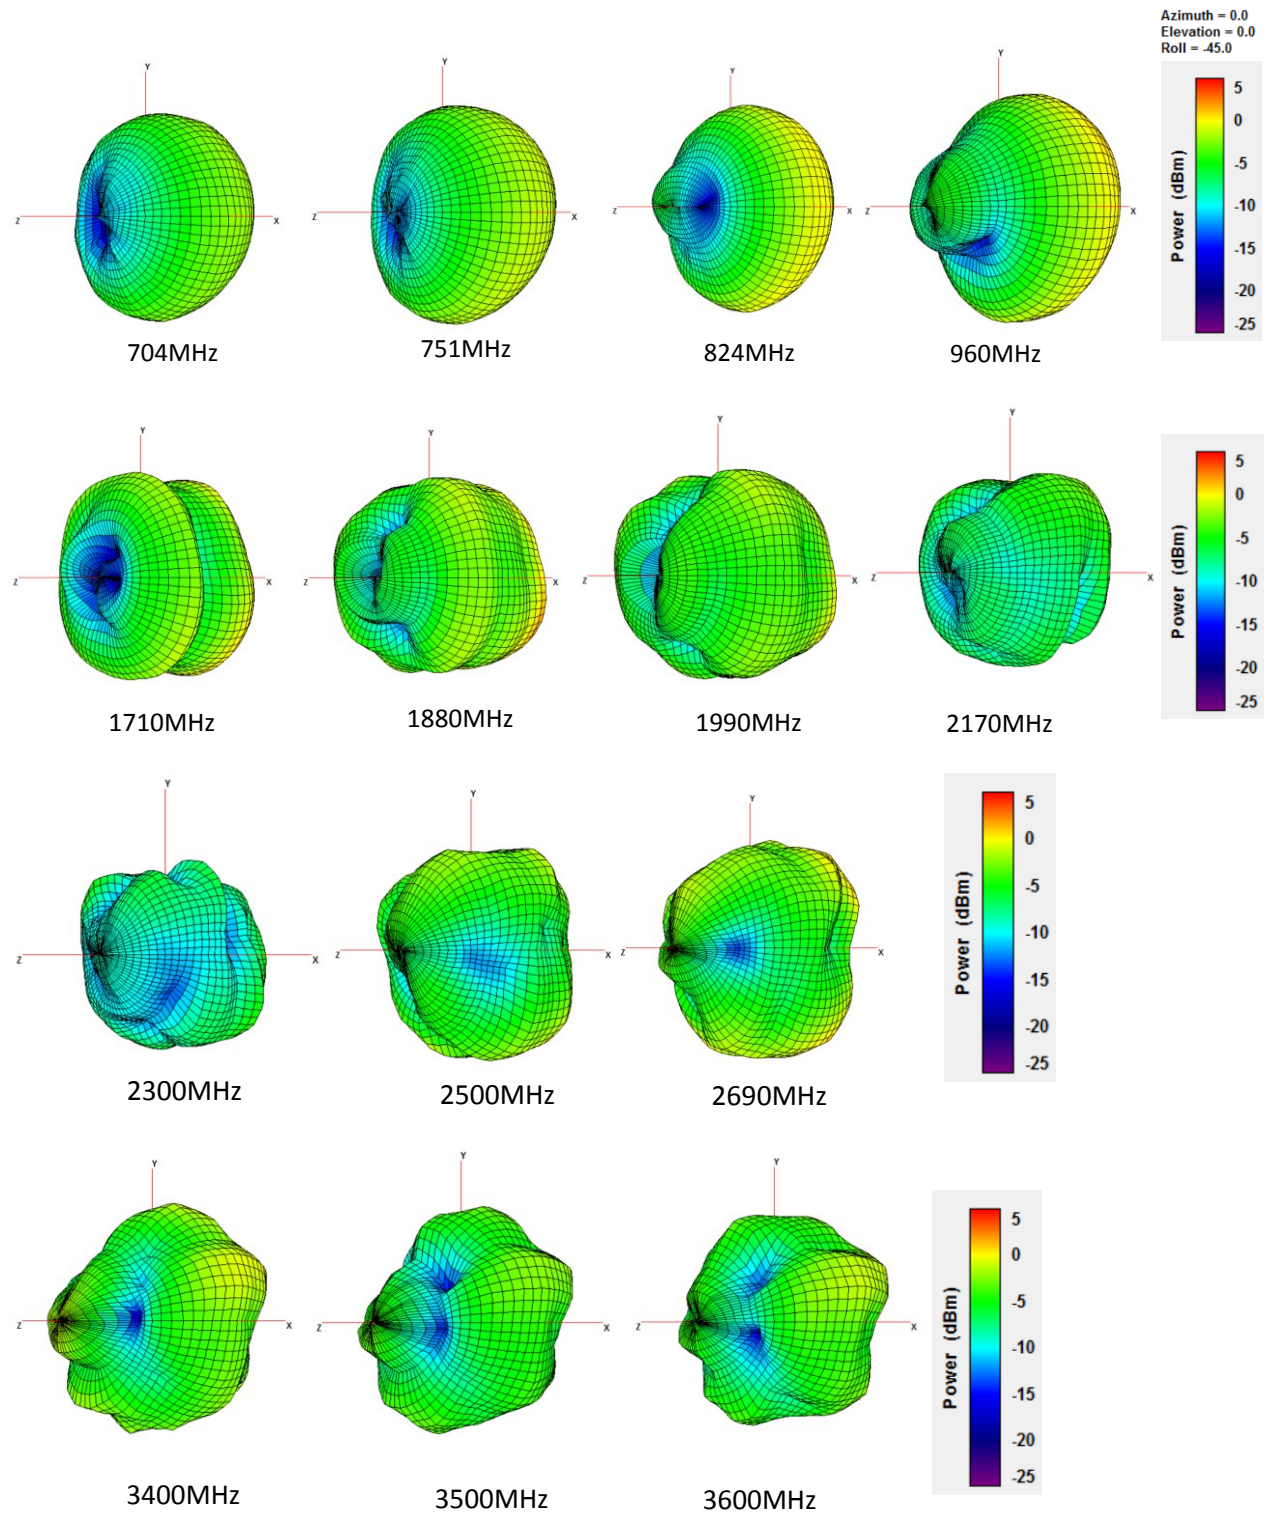


5.5 300*300mm Ground Plane Center – Straight

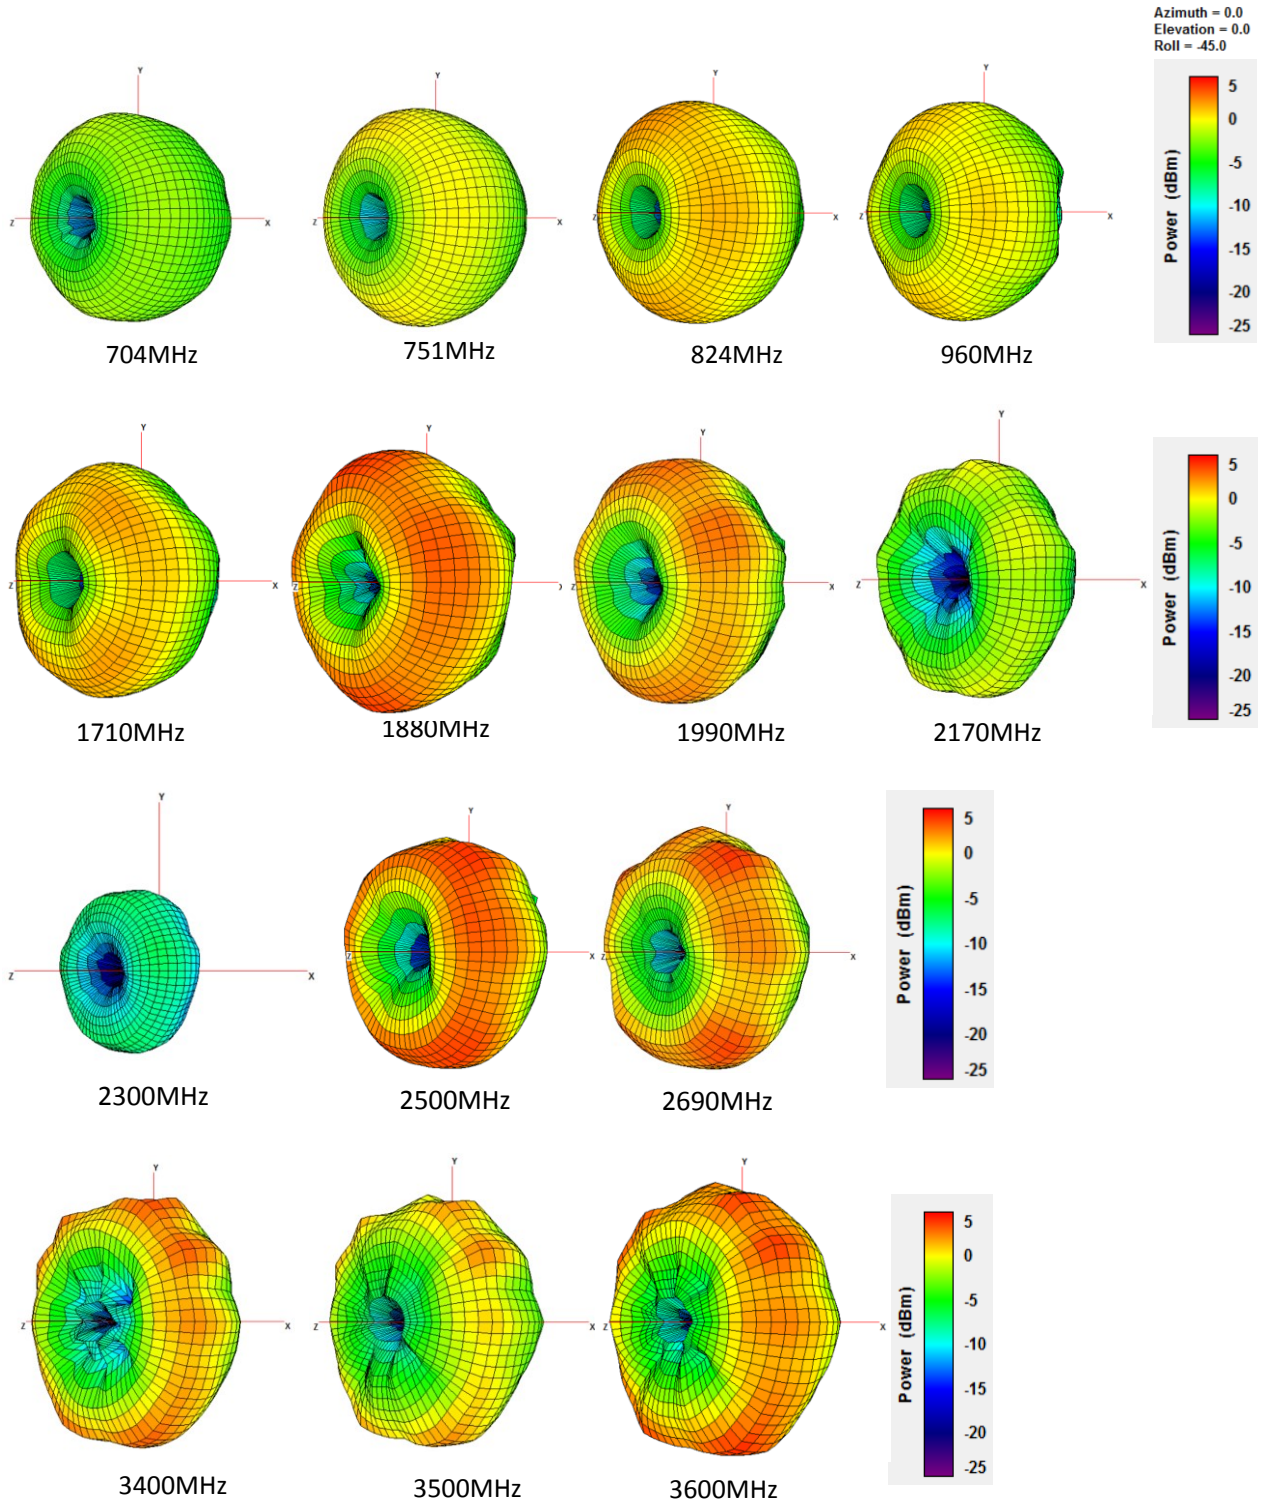


5.6 300*300mm Ground Plane Center – 90°

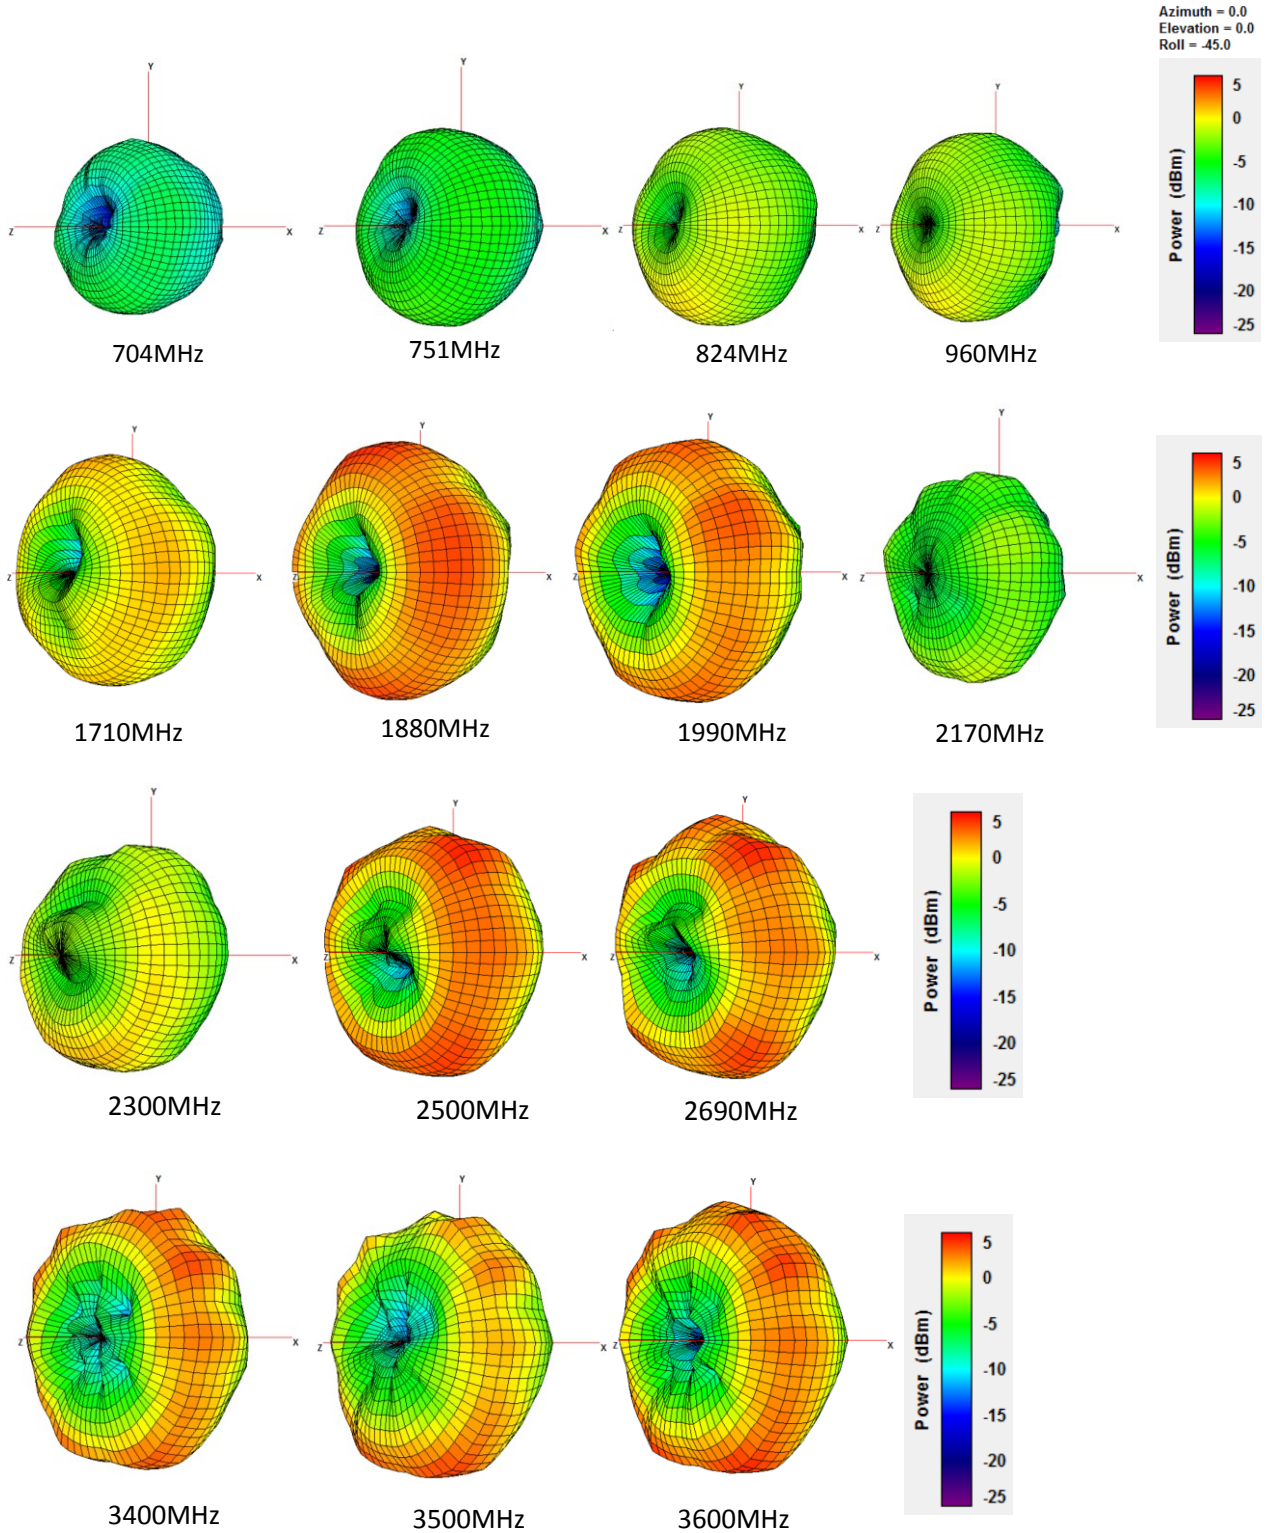


5.7 300*300mm Ground Plane Edge – Straight

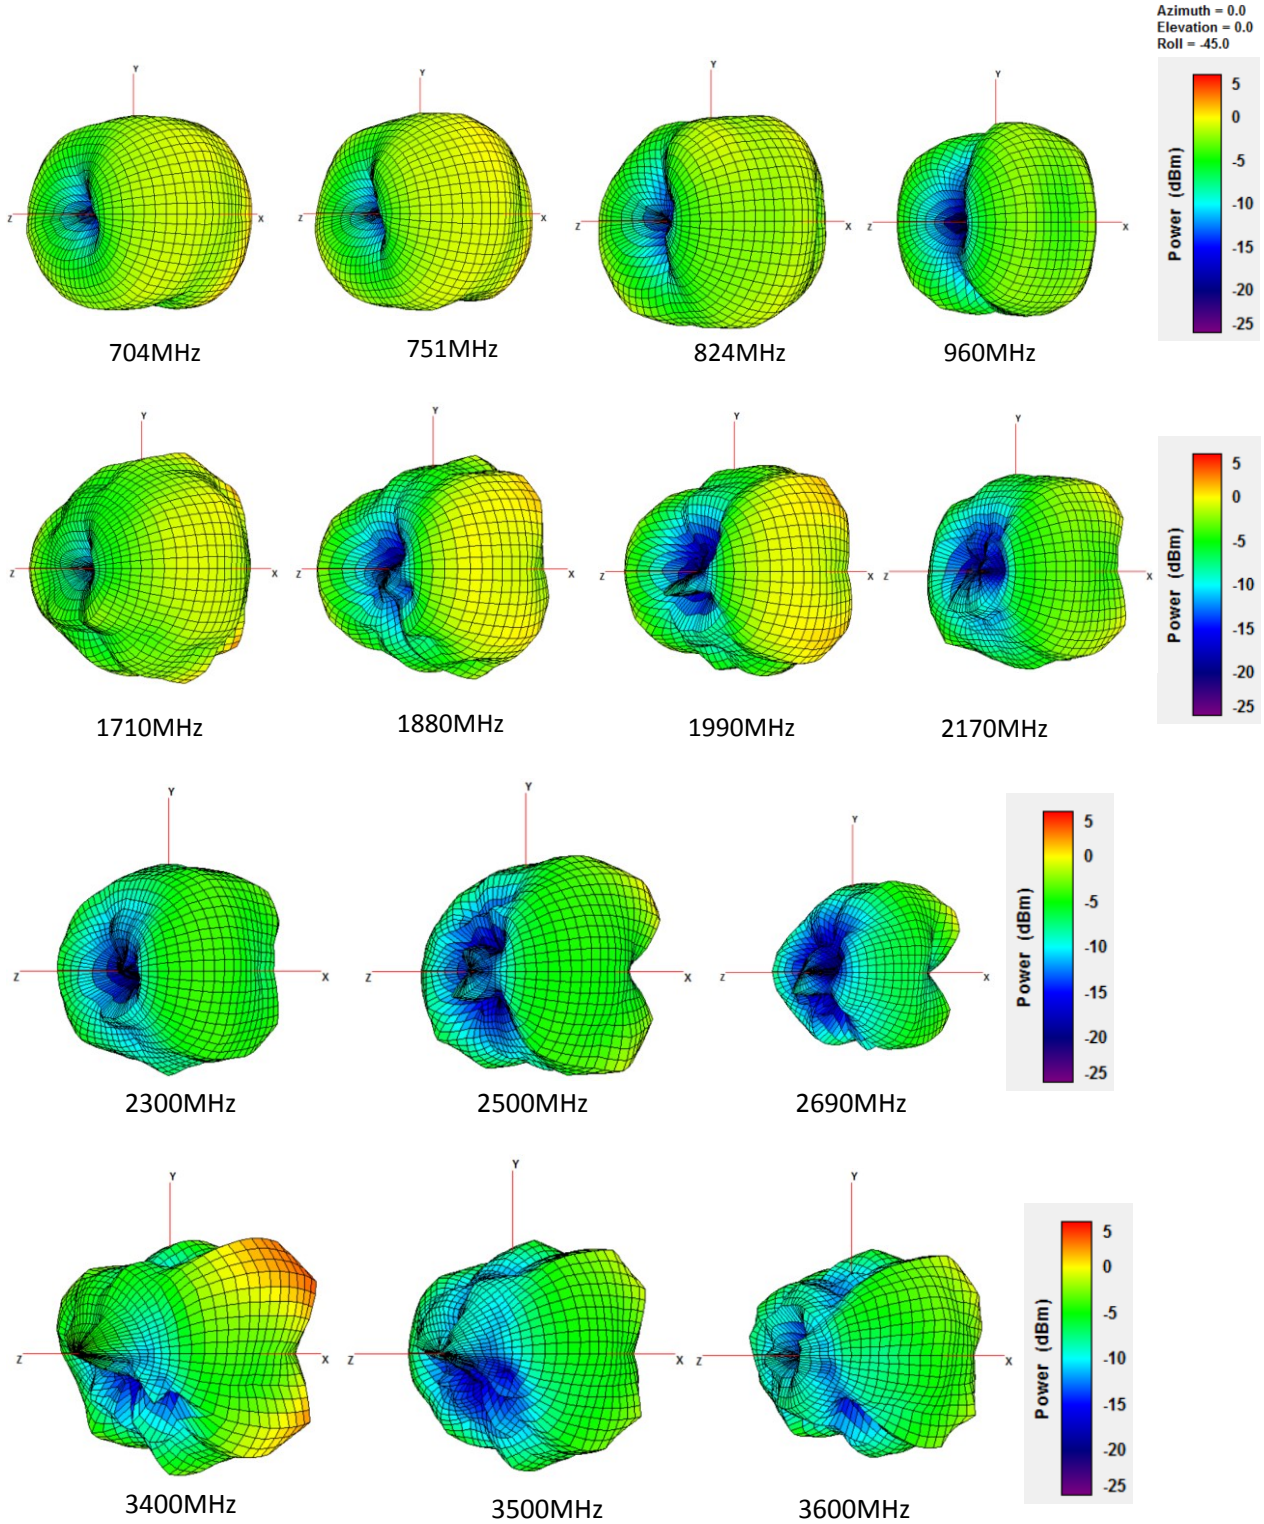

5.8 300*300mm Ground Plane Edge – 90°

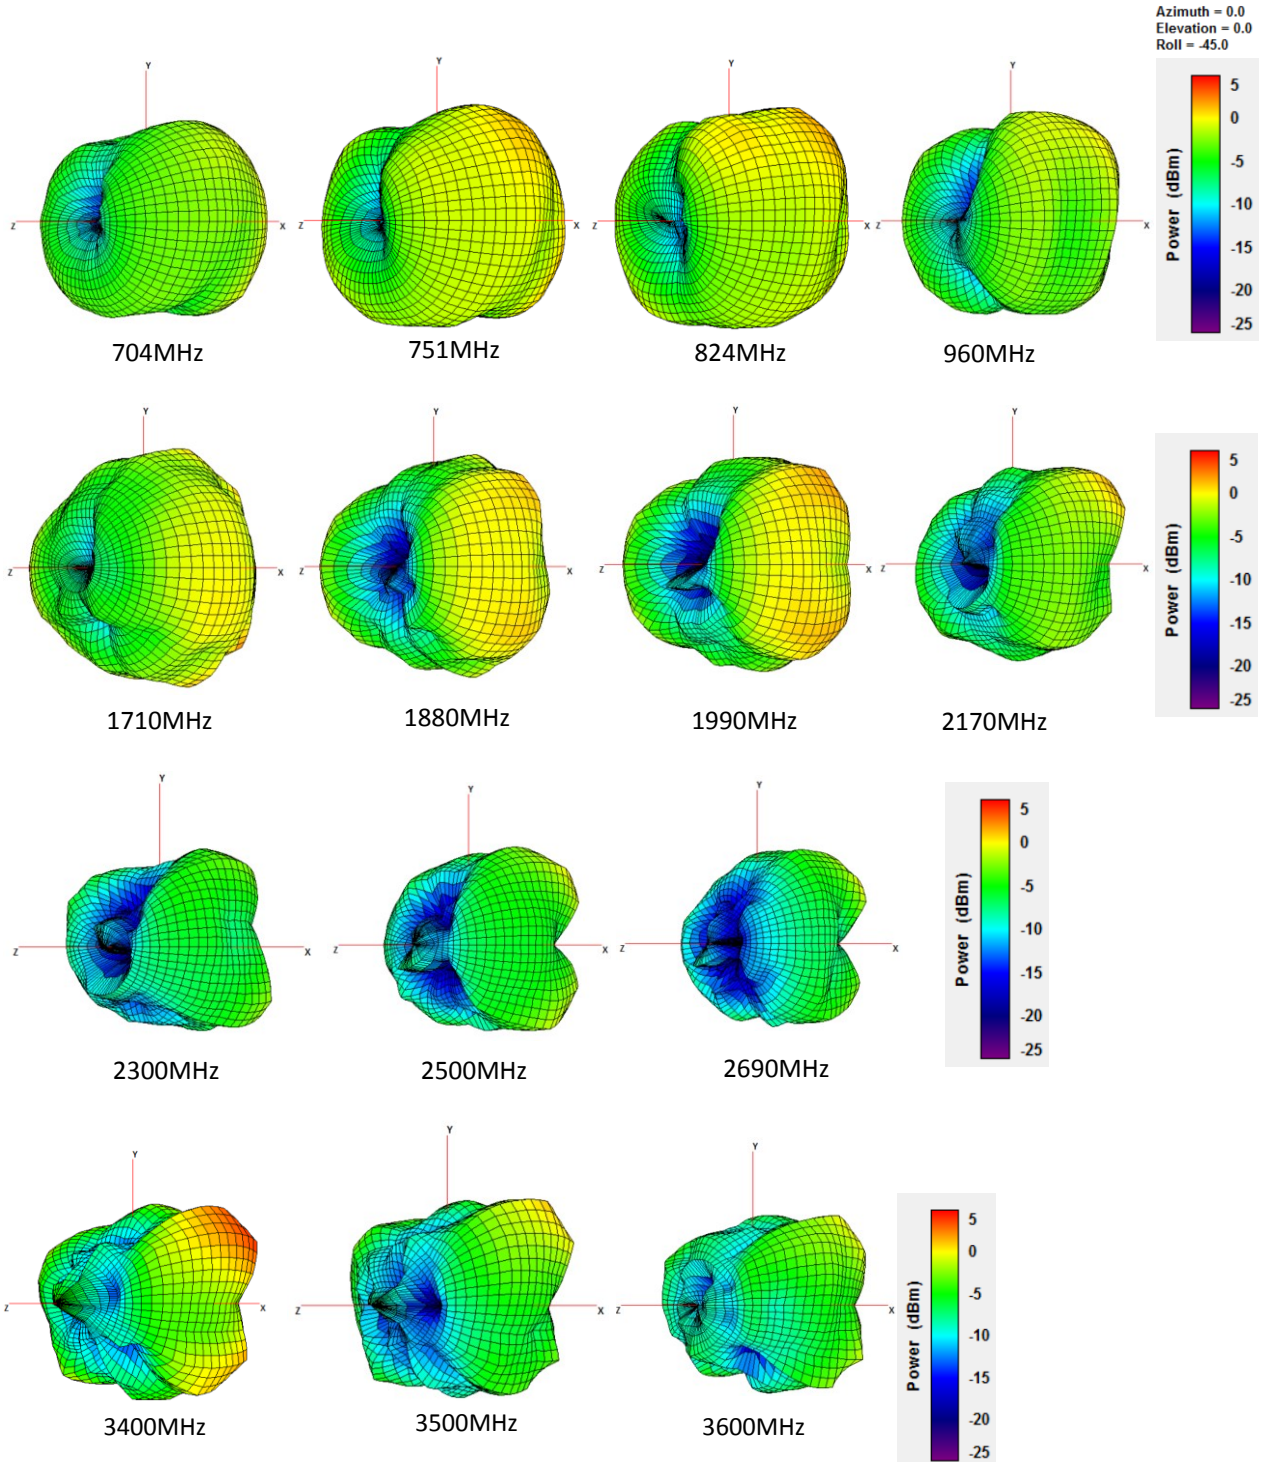


6. Mechanical Drawing (Unit: mm)

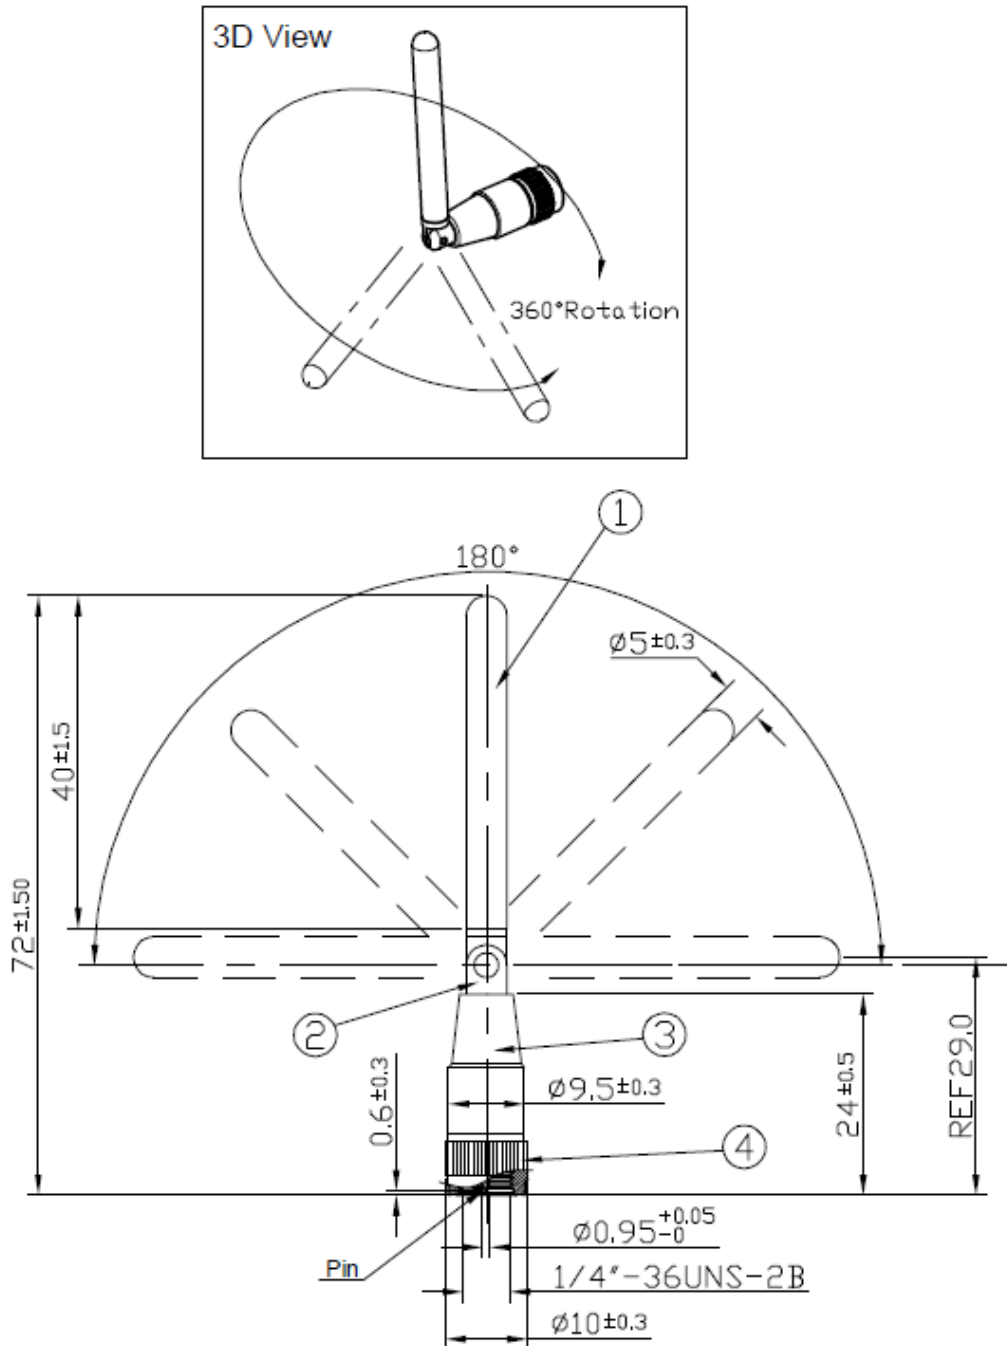

| | | |
|---|-----------|------------------|
| 1 | Housing | POM Black |
| 2 | Hinge | Brass Ni Plated |
| 3 | Cap | POM Black |
| 4 | Connector | SMA Male (Brass) |

7. Installation

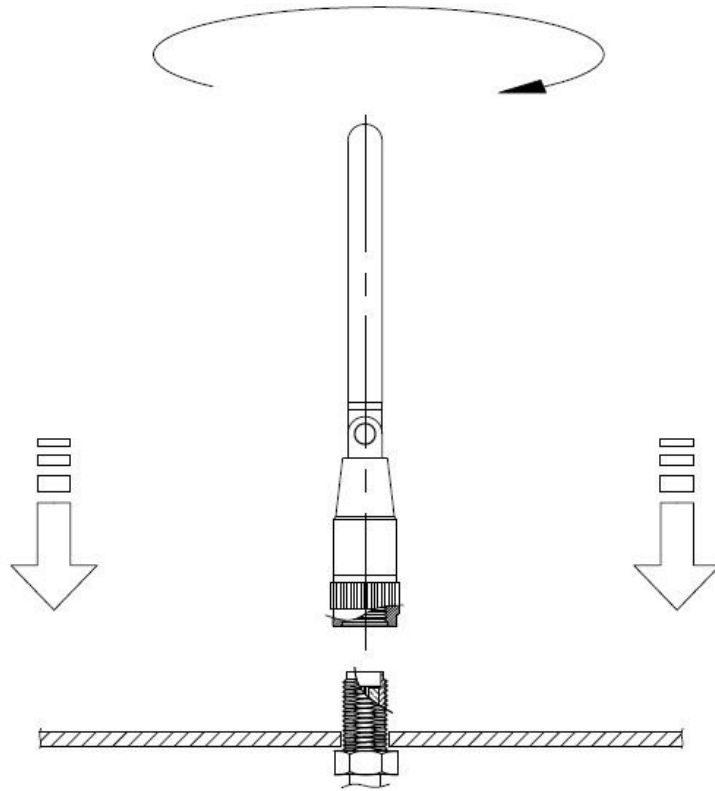


Recommended torque for mounting is 0.9 N·m
Maximum torque for mounting is 1.176 N·m

8. Minimum Ground Plane for LTE Efficiency

Different Ground Plane lengths were considered for acceptable efficiency for LTE bands.

Three different ground planes were chosen. They were all 30mm wide and the lengths were varied beginning at 90mm then 70mm and finally 60mm


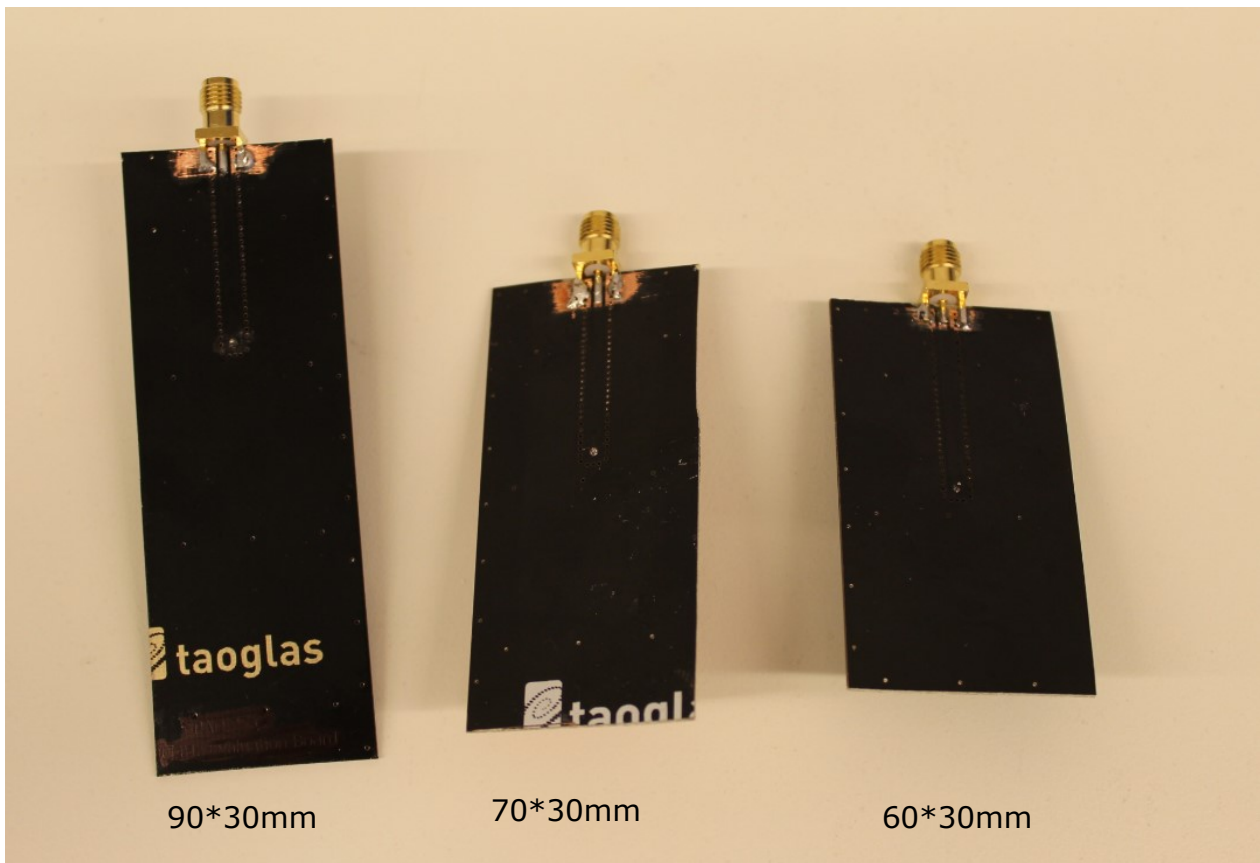


It was also considered whether the TG.09 antenna was positioned straight or at an angle of 90°.



The antenna was positioned on the edge of the Ground Plane for all tests.

| Parameter | | | | | | | | | | |
|--------------------|--------------------|-------------|---------------|---------------|---------------|---------------|---------------|-----------|------------|------|
| Straight Pose | | | | | | | | | | |
| Band | 700 LTE | GSM | DCS | PCS | UMTS/ HSPA | 2300 LTE | 2700 LTE | 3500 LTE | 3700LTE | |
| Frequency (MHz) | 703~ 803 | 824~ 960 | 1710~ 1880 | 1850~ 1990 | 1920~ 2170 | 2300~ 2400 | 2490~ 2690 | 3400~3600 | 3600~ 3800 | |
| Average Gain (dBi) | 90*30mm Ground | -1.4 | -3.2 | -3.2 | -1.9 | -2.3 | -5.1 | -2.0 | -3.8 | -2.9 |
| Efficiency (%) | | 72% | 49% | 48% | 64% | 59% | 31% | 63% | 42% | 54% |
| Peak Gain (dBi) | | 2.0 | 1.9 | 2.7 | 3.2 | 3.6 | 1.3 | 5.2 | 2.7 | 4.2 |
| Return Loss (dB) | | 9 | 4.8 | 5.1 | 11.4 | 11.1 | 5.3 | 9.6 | 9.5 | 7.9 |
| Average Gain (dBi) | 70* 30mm Ground | -2.7 | -2.7 | -3.4 | -2.2 | -1.8 | -5.7 | -1.5 | -3.9 | -2.0 |
| Efficiency (%) | | 53% | 54% | 45% | 60% | 67% | 28% | 70% | 42% | 62% |
| Peak Gain (dBi) | | 1.8 | 2.0 | 1.5 | 3.5 | 4.3 | 1.7 | 4.3 | 3.7 | 5.0 |
| Return Loss (dB) | | 7.3 | 7.1 | 4.2 | 7.3 | 12.4 | 4.4 | 14.7 | 8.9 | 9.9 |
| Average Gain (dBi) | 60* 30mm Ground | -3.9 | -2.9 | -2.9 | -2.4 | -1.6 | -7.3 | -1.4 | -4.3 | -3.0 |
| Efficiency (%) | | 41% | 50% | 51% | 58% | 69% | 20% | 72% | 37% | 49% |
| Peak Gain (dBi) | | 1.1 | 1.3 | 2.1 | 3.0 | 4.1 | 0.4 | 4.5 | 3.0 | 4.5 |
| Return Loss (dB) | | 6.5 | 7.7 | 5.0 | 6.4 | 9.9 | 3.4 | 12.4 | 6.3 | 6.4 |
| 90° Bend Pose | | | | | | | | | | |
| Average Gain (dBi) | 90*30mm Ground | -1.7 | -2.4 | -3.5 | -2.1 | -2.1 | -5.3 | -2.1 | -3.3 | -2.6 |
| Efficiency (%) | | 68% | 58% | 45% | 61% | 61% | 30% | 61% | 47% | 54% |
| Peak Gain (dBi) | | 2.7 | 2.5 | 2.1 | 3.1 | 3.5 | 1.6 | 5.2 | 3.4 | 4.3 |
| Return Loss (dB) | | 7.5 | 7.6 | 4.5 | 9.1 | 12.5 | 5.1 | 8.7 | 12.3 | 7.8 |
| Average Gain (dBi) | 70*30mm Ground | -4.2 | -2.3 | -3.7 | -2.5 | -1.8 | -4.6 | -1.5 | -3.4 | -2.0 |
| Efficiency (%) | | 39% | 59% | 42% | 56% | 67% | 35% | 70% | 46% | 62% |
| Peak Gain (dBi) | | 1.4 | 1.7 | 1.4 | 3.2 | 4.3 | 2.1 | 4.1 | 4.1 | 5.1 |
| Return Loss (dB) | | 4.9 | 11.2 | 3.9 | 6.4 | 13.5 | 5.2 | 12.6 | 10.6 | 9.5 |
| Average Gain (dBi) | 60*30mm Ground | -5.6 | -3.0 | -3.2 | -2.6 | -1.7 | -5.9 | -1.4 | -3.9 | -3.1 |
| Efficiency (%) | | 28% | 50% | 47% | 54% | 68% | 26% | 73% | 41% | 49% |
| Peak Gain (dBi) | | 0.0 | 1.0 | 1.8 | 3.0 | 3.8 | 1.1 | 4.3 | 3.3 | 4.5 |
| Return Loss (dB) | | 4.4 | 11.5 | 4.6 | 6.0 | 10.8 | 3.9 | 11.2 | 7.0 | 6.2 |


8.1 Return Loss

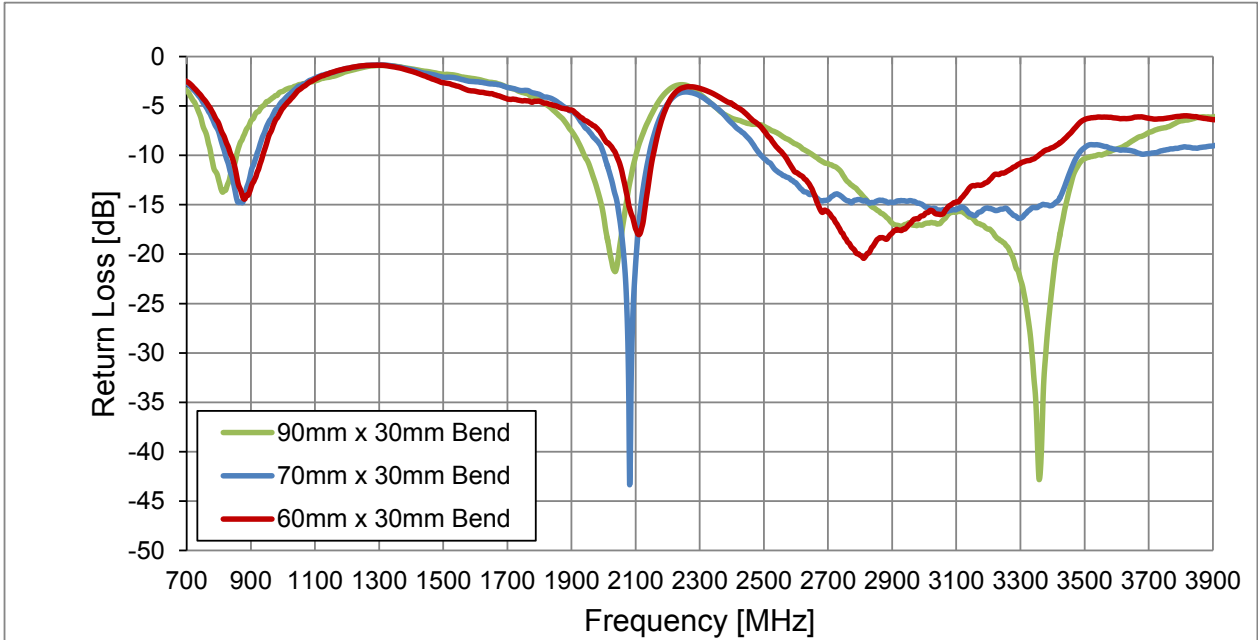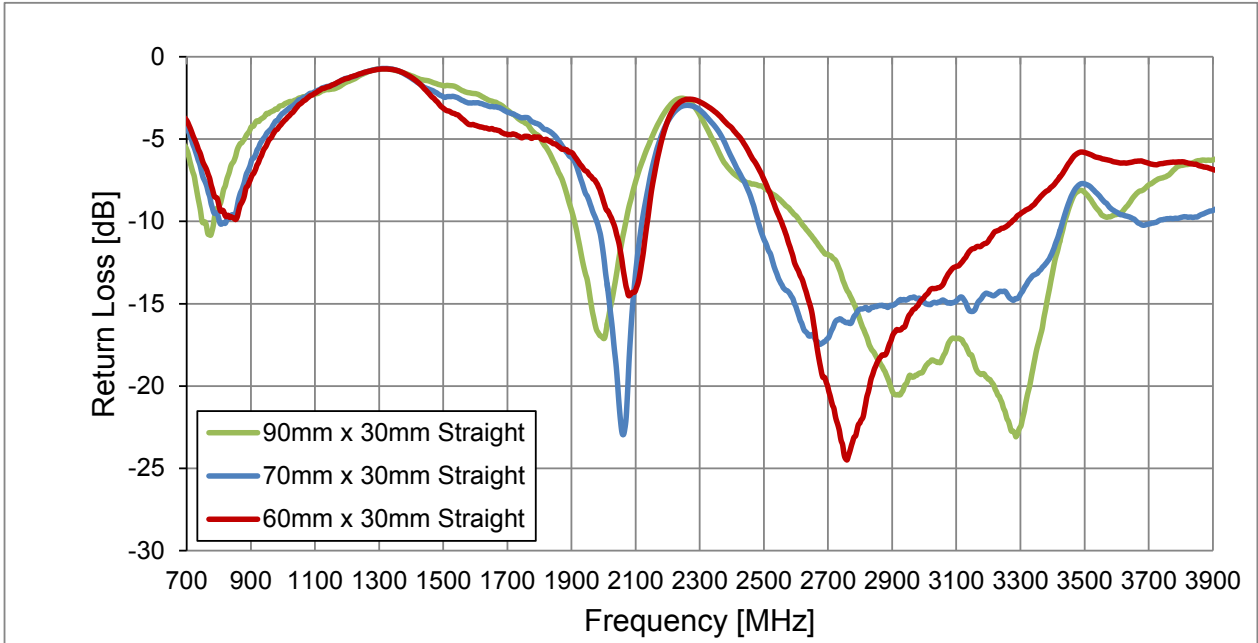


8.2 VSWR

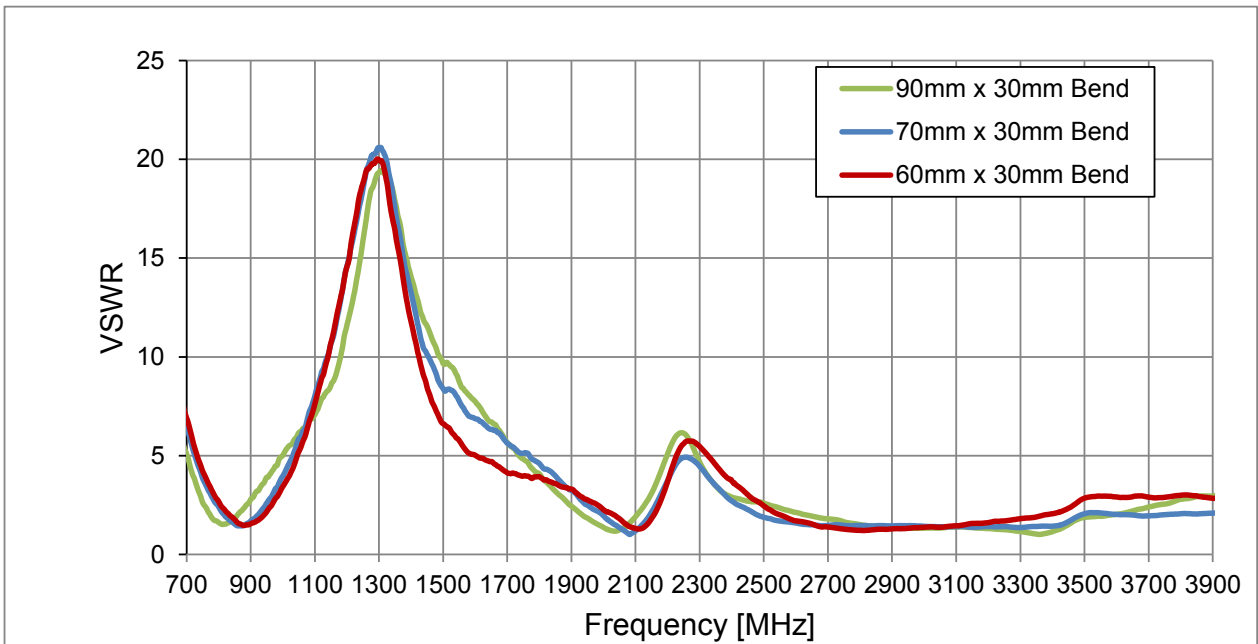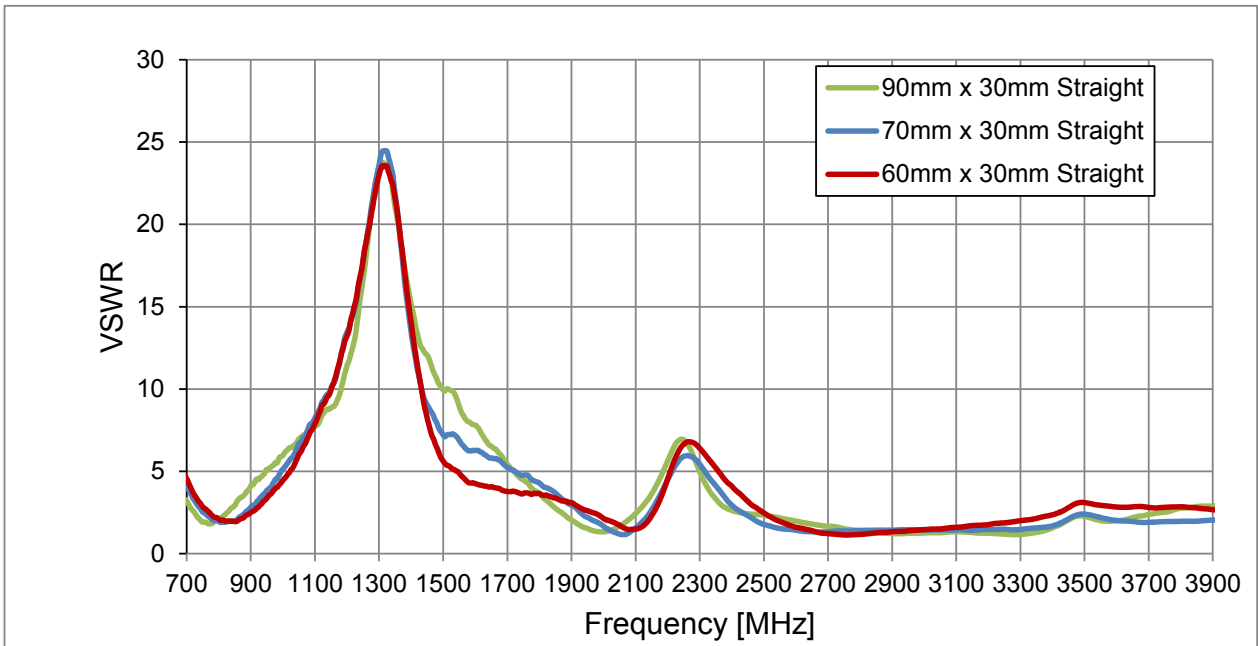


8.3 Efficiency for Straight Antenna

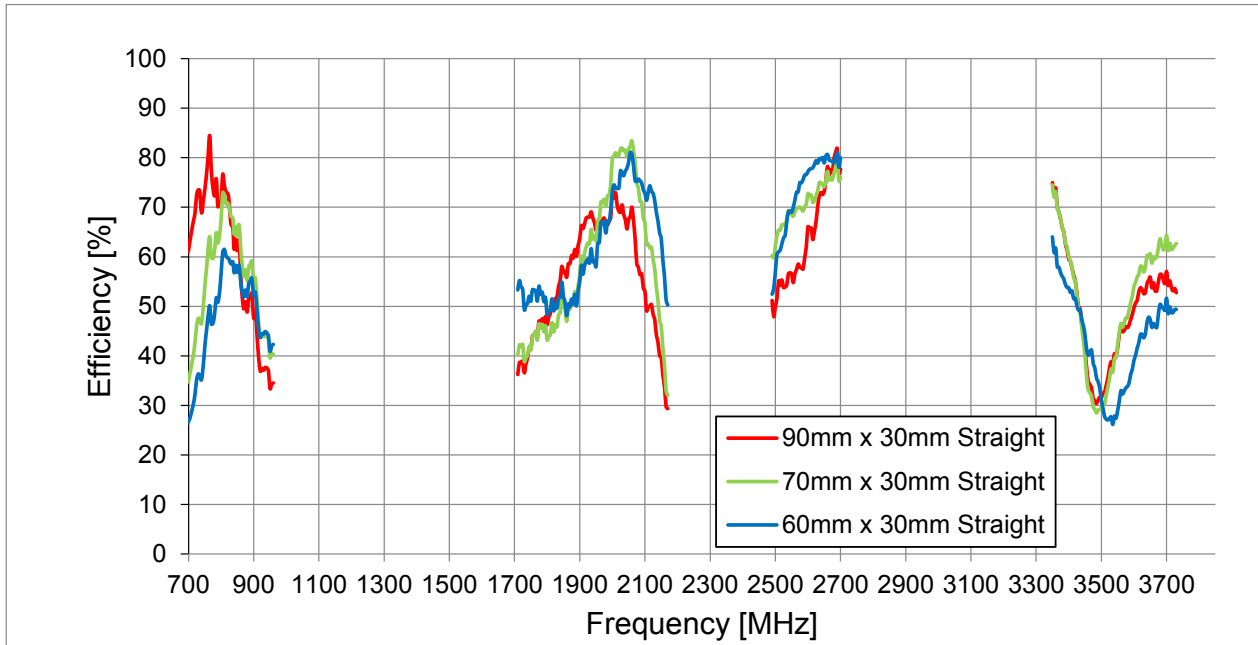


8.4 Peak Gain for Straight Antenna

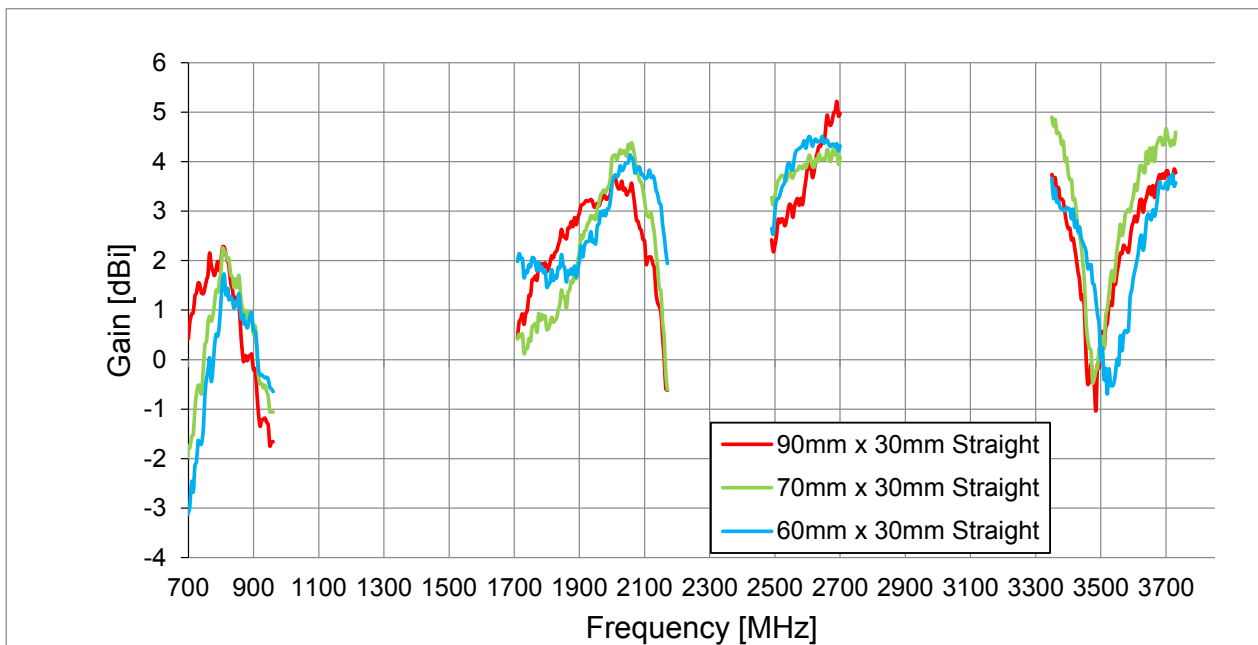


8.5 Average Gain for Straight Antenna

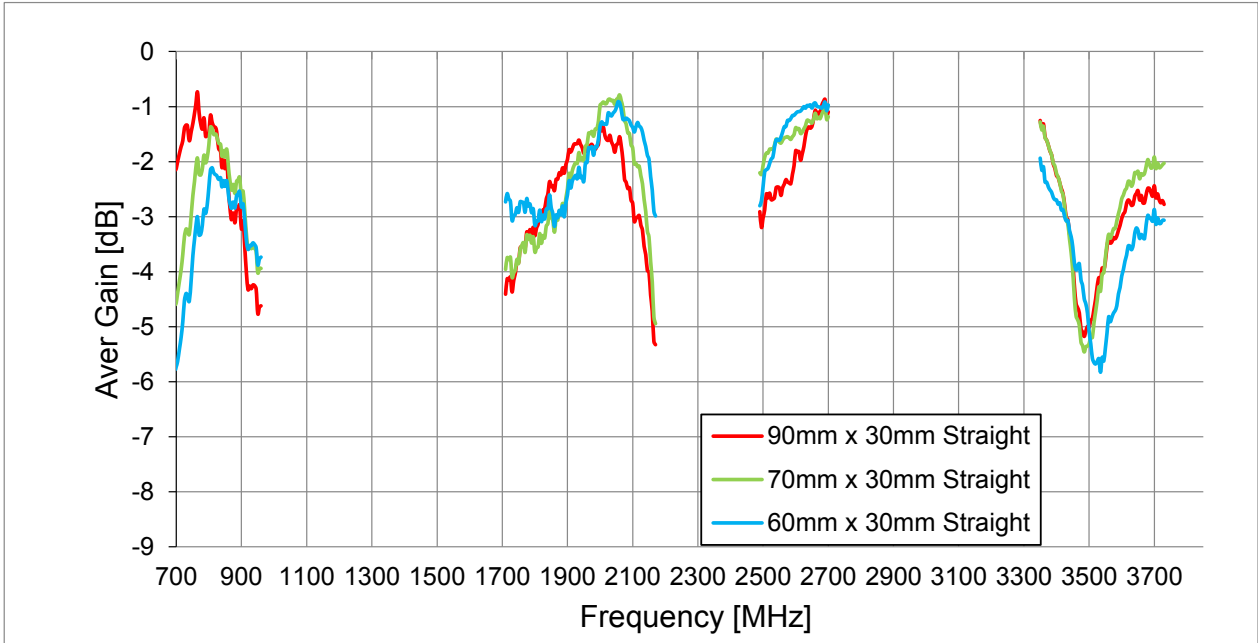


8.6 Efficiency for 90° Bend

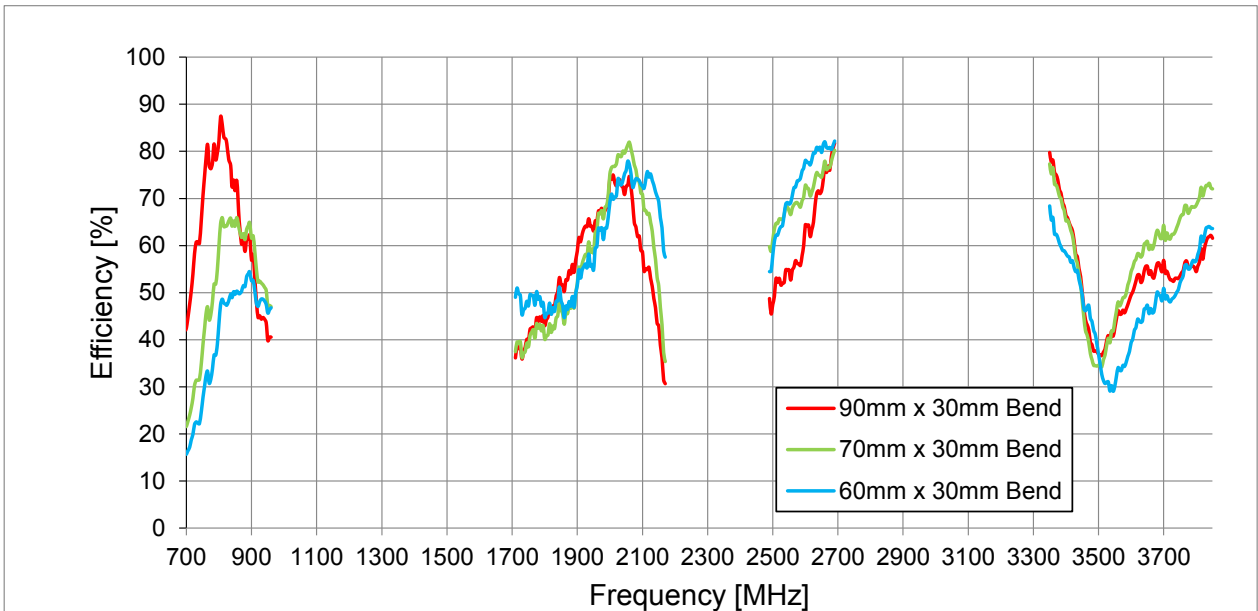

8.7 Peak Gain for 90° Bend

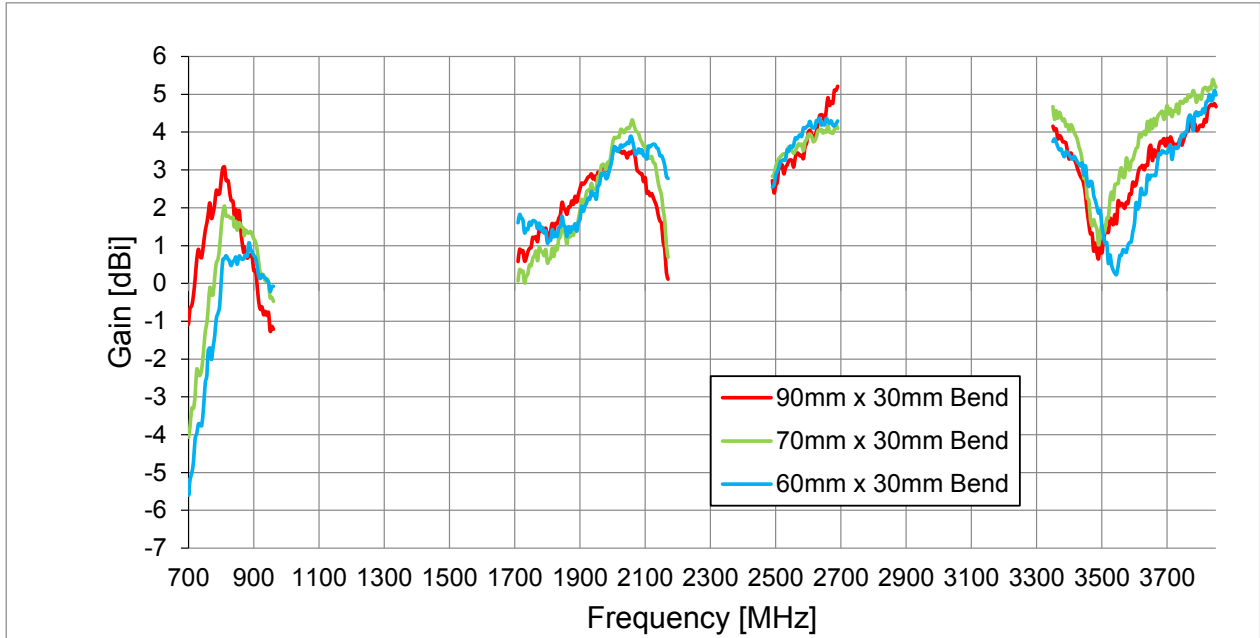


8.8 Average Gain for 90° Bend

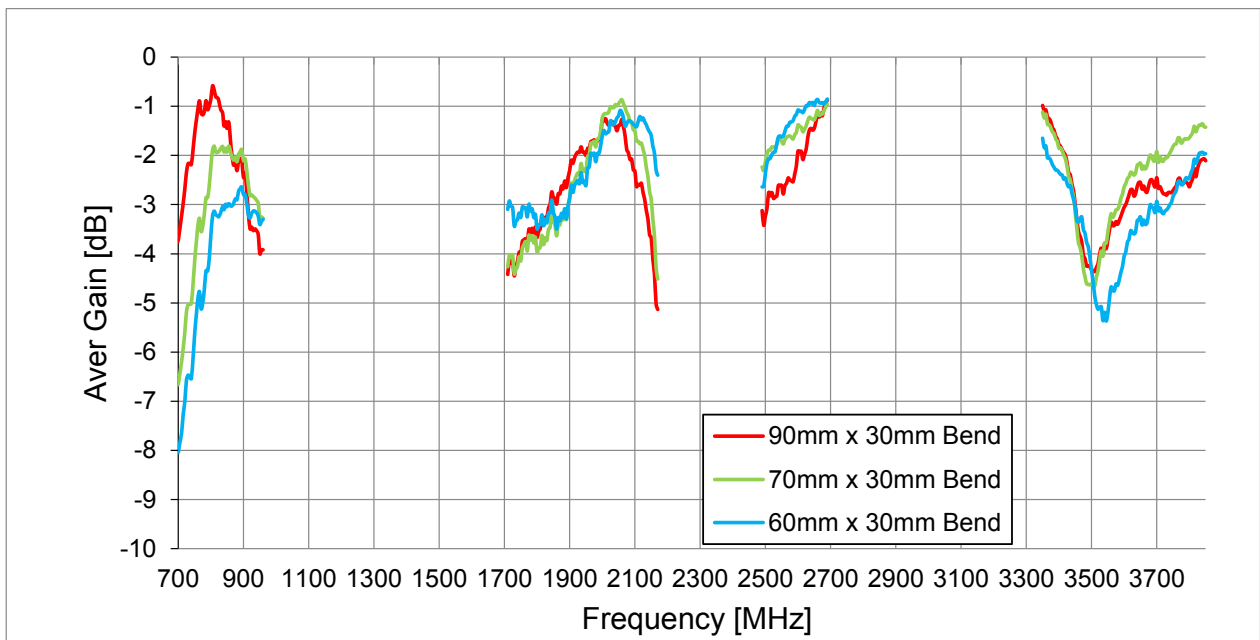


9. Packaging


1 pc TG.09.0113 per small zipper bag
 PE Bag Dimensions - 74*42mm
 Weight - 8.6g

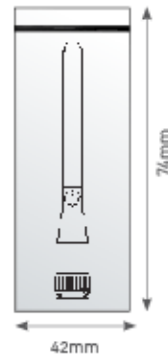


100 PE bags per large PE bags
 100 pcs TG.09.0113 per large PE bags
 Weight - .86kg

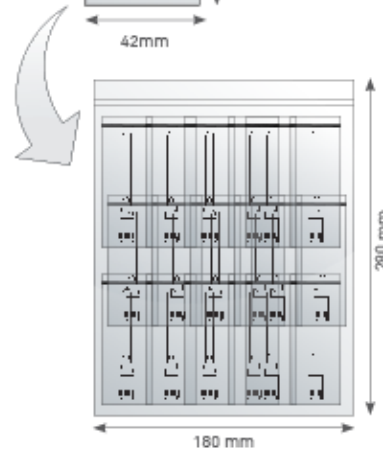

1500 pcs TG.09.0113 per carton
 Carton Dimensions - 360*310*160mm
 Weight - 13.6kg

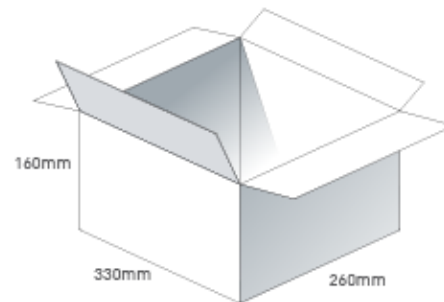

Pallet Dimensions 1080*930*1430mm
 72 Cartons per Pallet
 6 Cartons per layer
 12 Layers

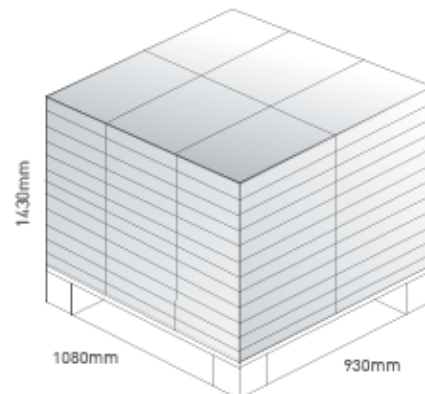



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.