

## AVQ400 Series

396 Watts

### Data Sheet

**Total Power:** 396 Watts  
**Input Voltage:** 36 - 75 V  
**# of Outputs:** Single

### SPECIAL FEATURES

- 2:1 wide input range
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Basic insulation system
- Openframe structure with baseplate option
- Output over current protection

### SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950



### Electrical Specifications

Input	
Input range	36 - 75 VDC
Efficiency	95% @ 12 Vo
Output	
Voltage tolerance	+/-1.6%
Line regulation	24 mV
Load regulation	60 mV
Noise/ripple	3.3 Vo: 150 mV
Overshoot protection	Hiccup
Overtemperature protection	Auto-restart
Switching frequency	140 KHz
Temperature co-efficient	±0.02/°C
Isolation	
I/O isolation	1500 VDC min.

### Environmental Specifications


Operating ambient temperature range	-40° C to +85° C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	1.5 Million hours
RoHS Compliant	

### Ordering Information

Model number	Input voltage	Output voltage	Power
AVQ400-48S12B-4L	36 - 75 Vin	12 V @ 33 A	396 W
AVQ400-48S12B-6L	36 - 75 Vin	12 V @ 33 A	396 W
AVQ400-48S12PB-4L	36 - 75 Vin	12 V @ 33 A	396 W
AVQ400-48S12PB-6L	36 - 75 Vin	12 V @ 33 A	396 W

- Standard version is negative enable
- "-6" = 3.8 mm pin length
- "-4" = 4.8 mm pin length
- "-L" = RoHS 6 compliance
- "-P" = Positive enable
- "B" = Baseplate

### Mechanical Drawings

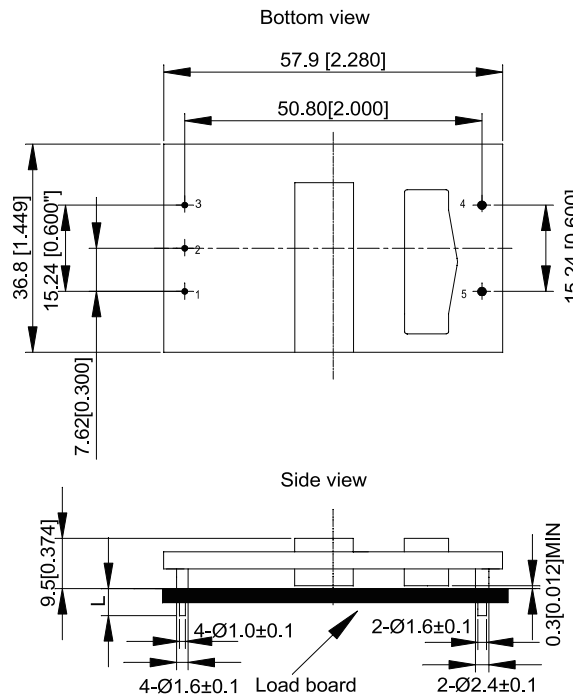

Unit: mm[inch]

Bottom view: pin on upsi

Tolerance: X.Xmm±0.5mm[X.X in.±0.02in.]

X.XXmm±0.25mm[X.XX in.±0.01in.]

## Pin Assignments

Pin #	Function
1	+V in
2	Enable
3	-V in
4	-V out
5	+V out

**Notes:**

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

## WORLDWIDE OFFICES

**Americas**

2900 S.Diablo Way  
 Tempe, AZ 85282  
 USA  
 +1 888 412 7832

**Europe (UK)**

Waterfront Business Park  
 Merry Hill, Dudley  
 West Midlands, DY5 1LX  
 United Kingdom  
 +44 (0) 1384 842 211

**Asia (HK)**

14/F, Lu Plaza  
 2 Wing Yip Street  
 Kwun Tong, Kowloon  
 Hong Kong  
 +852 2176 3333



[www.artesyn.com](http://www.artesyn.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2015 Artesyn Embedded Technologies, Inc.

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
 For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)