


# Surface Mount 1575.42MHz SAW Filter

AFS20A02-1575.42-T2



**RoHS**  
Compliant



2.0 x 1.6 x 0.9 mm

## FEATURES:

- 2.0 \* 1.6 \* 0.9 mm low profile SMT package
- Low Insertion loss
- Excellent selectivity with high out-of-band rejection

## APPLICATIONS:

- Wireless Communication
- Remote Control
- Cellular Phones

## ELECTRICAL SPECIFICATIONS:


### Maximum Ratings

Item	Value
Input Power Level	+10 dBm max.
DC Permissive Voltage	3V DC max.
Operating Temperature Range	-40°C to + 85°C
Storage Temperature Range	-55°C to + 95°C

Parameters	Minimum	Typical	Maximum	Units	Notes
Center Frequency ( $f_c$ )		1575.42		MHz	
Insertion Loss (IL)		1.15	1.60	dB	1574.42 ~ 1576.42MHz
3-dB Bandwidth		2		MHz	
Amplitude Ripple		0.1	0.5	dB	1574.42 ~ 1576.42MHz
Worst-Case Input / Output Return Loss		20	10	dB	1574.42 ~ 1576.42MHz
Stop-band Attenuation (Referenced to 0.0 dB)	31	33		dB	100MHz ~ 960MHz
	31	33			960MHz ~ 1460MHz
	22	26			1460MHz ~ 1513MHz
	22	28			1648MHz ~ 1710MHz
	25	32			1710MHz ~ 1990MHz
	25	30			1990MHz ~ 2300MHz
	29	31			2300MHz ~ 4000MHz
	20	24			4000MHz ~ 6000MHz
Source Impedance ( $Z_S$ )		50		$\Omega$	See note # 1
Load Impedance ( $Z_L$ )		50		$\Omega$	See note # 1


**Note #1:** No matching network required for operation into 50 $\Omega$ 's

## TEST CIRCUIT:

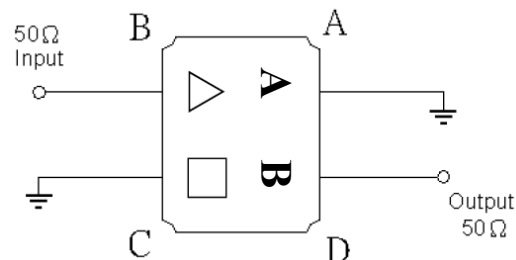



# Surface Mount 1575.42MHz SAW Filter

AFS20A02-1575.42-T2




2.0 x 1.6 x 0.9 mm

## OUTLINE DIMENSIONS:

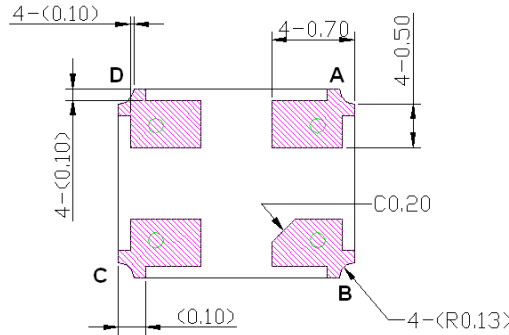

## Recommended Land Pattern:

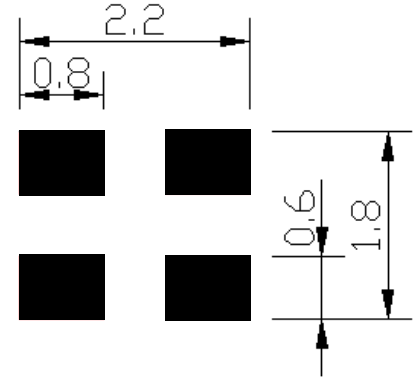


#B:	Input
#D:	Output
#A,C:	Ground
Unit:	mm

- △ = Year (2=2012, for example)
- = Week (A through Z → Week-01~ Week-26)  
(a through z → Week-27~ Week-52)


\*All Dimensions are in mm

## FREQUENCY CHARACTERISTICS:

Filter Frequency Response (Narrowband)

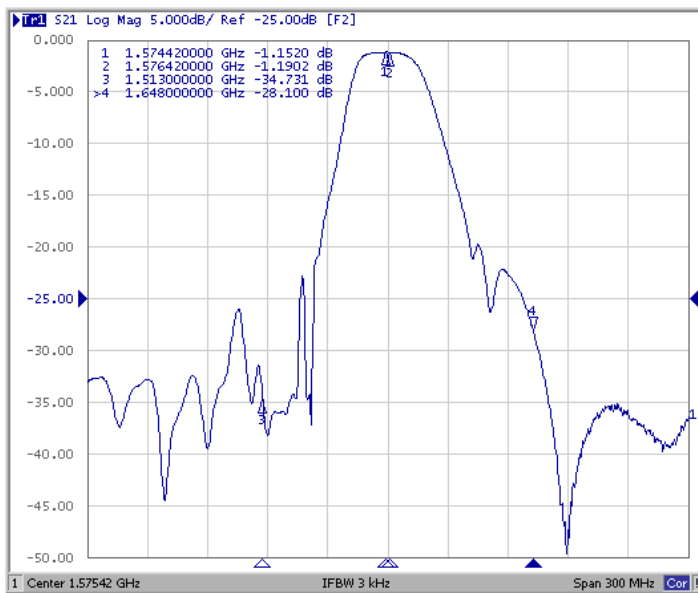

Filter Frequency Response (wideband)

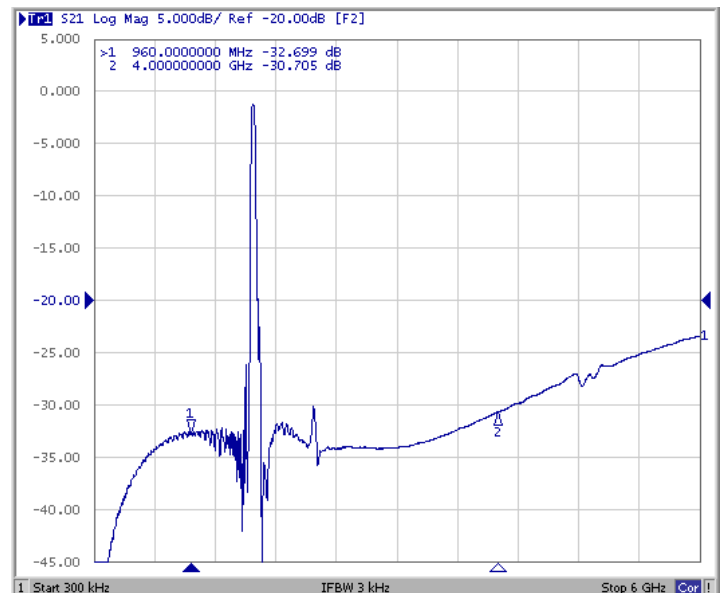


# Surface Mount 1575.42MHz SAW Filter

AFS20A02-1575.42-T2




RoHS  
Compliant




2.0 x 1.6 x 0.9 mm

## REFLECTION FUNCTIONS:

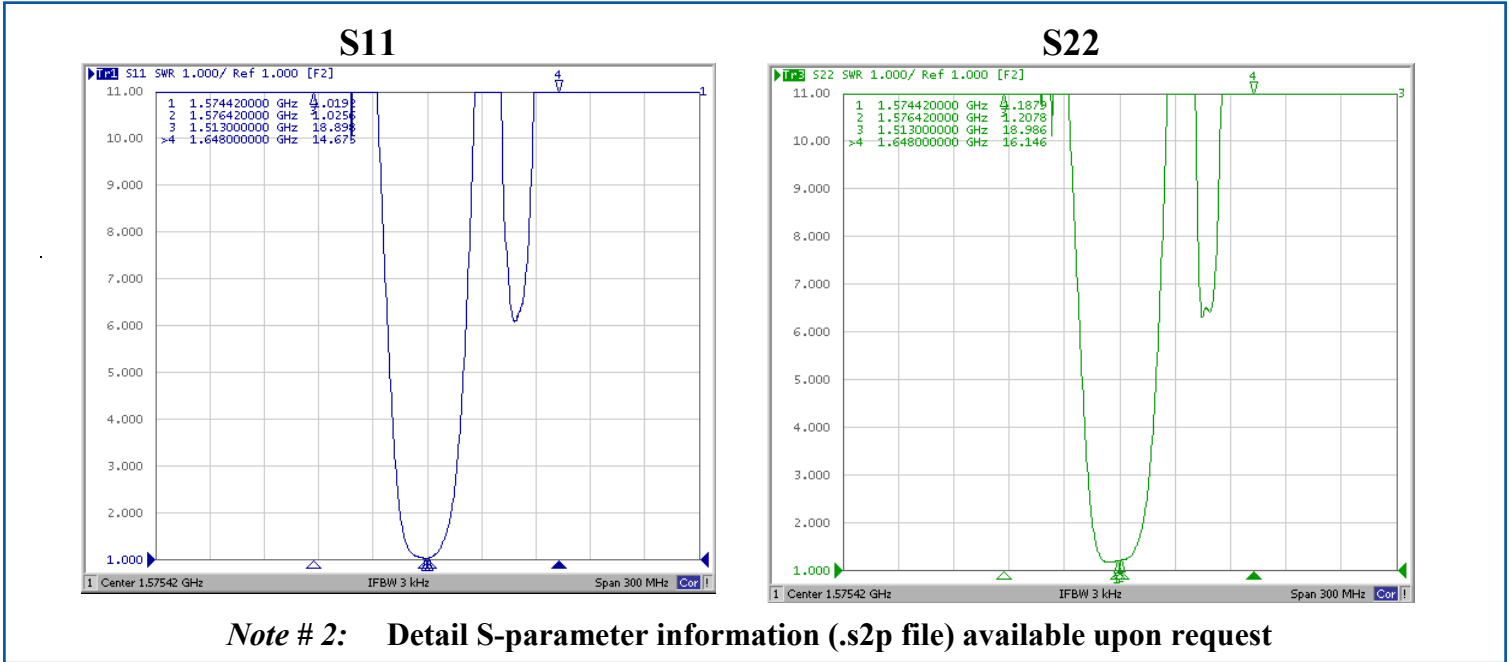

## REFLOW PROFILE:

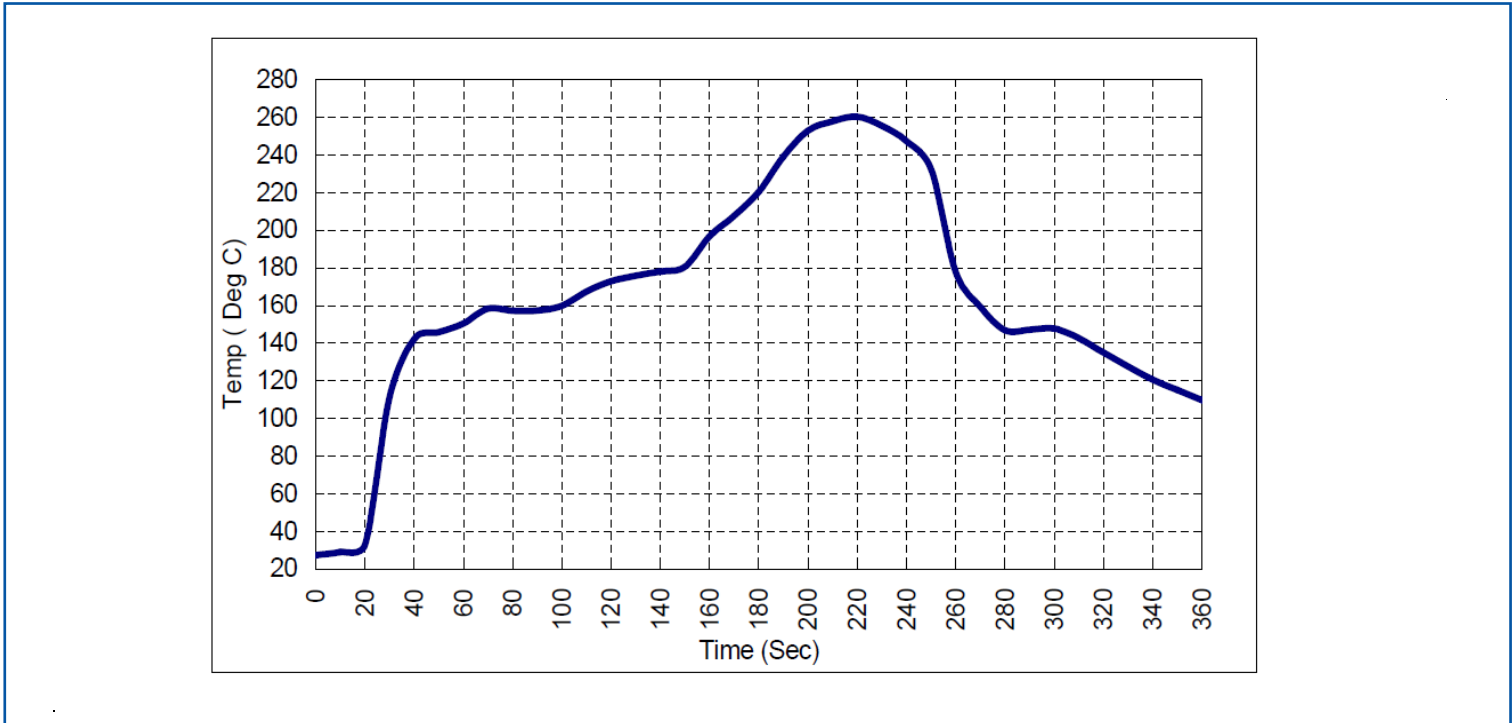

ABRACON IS  
ISO 9001:2008  
CERTIFIED



Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

Revised: 02.01.12

