
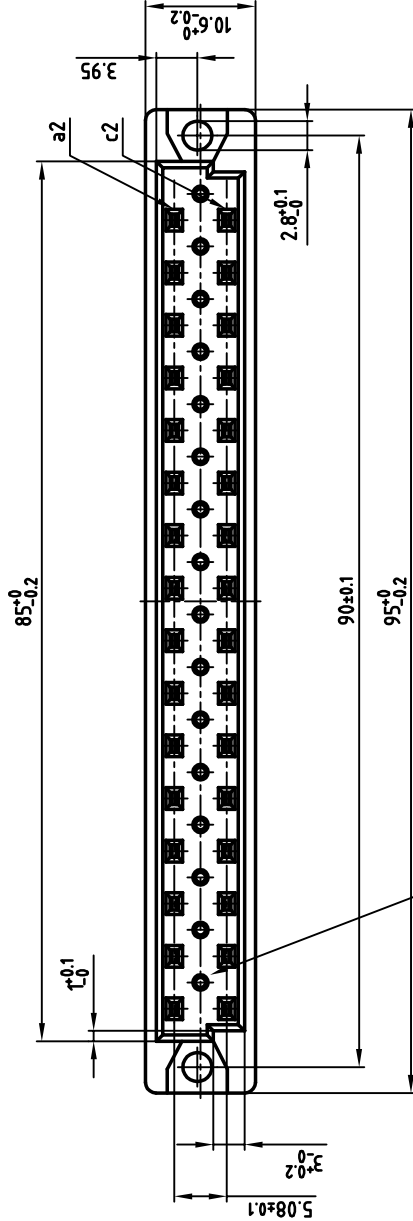


SEE NOTE 3

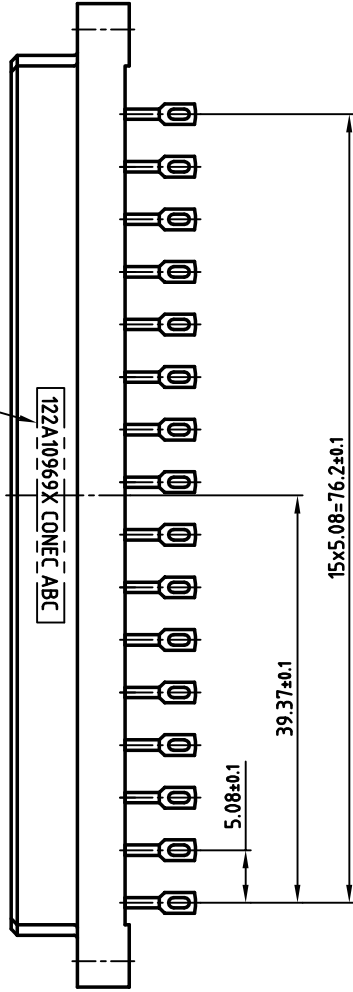

16 HOLES FOR CODE PINS ϕ 1x4.5mm DEEP

NOTES:

1. INSULATORS: PBT GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
PLATING: min. 8µin HARD GOLD OVER min. 50µin NICKEL
3. CONNECTOR IS PART MARKED: 122A10969X CONEC ABC

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GMBH DO NOT ALTER CAD DRAWING BY HAND

CONEC CORPORATION BRAMPTON, ONTARIO		2000	date	name	tolerance	scale:	2:1 (4:1)
drawn	20.12.	20.12.	drawn	Pareil	material:	SEE NOTES	
appd.	20.12.	20.12.	appd.	E. Mickenbecker	title:	FEMALE CONNECTOR TYPE "D" 32pos. SOLDER LUG	
norm			norm	DIN EN 60603	dwg no:	12K1A030A	DIN-A 3
e-sold			e-sold		product no:	122A10969X	sh: 1/1

