



Smart Technology. Delivered.

# HORIZONTALLY POLARIZED OMNI ANTENNAS

## ODH24-13



### 2400-2485 MHz HORIZONTALLY POLARIZED OMNI ANTENNAS

The horizontally polarized omnidirectional antenna systems offered by Laird are constructed of rigid aluminum extrusion which is powder coat painted. They feature integrated 50 ohm passive feeds that come standard with type N female connectors. Horizontally polarized antennas offer the user great rejection of interference if that interference is vertically polarized, as is the case in most WLAN systems.

#### FEATURES


- Horizontally polarized
- 13 dBi antenna gain
- Type N female integrated connector
- Extremely rugged for long service life in extreme environments
- Weatherproof

#### MARKETS

- 2.4 GHz ISM band applications
- 802.11b and 802.11g wireless systems
- Point-to-multi-point systems
- Base station antennas
- Wireless broadband systems
- WLAN access points
- WiMAX

PARAMETER	ODH24-13
Frequency range	2400 - 2485 MHz
Input return loss (S11)	-14 dB
VSWR	1.5:1
Impedance	50 ohm
Input power	100 W
Pole diameter (OD)	2 - 2.5 in (50-60 mm)
Gain	13 dBi
Vertical beamwidth	7°
Cross polarization rejection	-27 dB
Operating temperature	-40 to +70°C
Down tilt (mechanical)	10°
Wind loading - 100 mph	63 lbf
140 mph	124 lbf
100 mph: 1/2" radial ice	80 lbf
Weight	9 lbs (4.8 kg)
Dimensions (L +/- 1.0 in)	49 x 4 x 1 in (124 x 10 x 2.5 cm)

#### ANTENNA PATTERNS

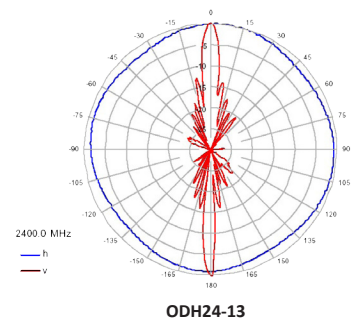

### SYSTEM ORDERING

ODH24-13 13 dBi    2.4 GHz horizontally polarized omnidirectional antenna

Americas: +1.847.839.6907  
 IAS-AmericasEastSales@lairdtech.com  
 Europe: +44.1628.858941  
 IAS-EUSales@lairdtech.com  
 Asia: +86.21.5855.0827.127  
 IAS-AsiaSales@lairdtech.com  
 www.lairdtech.com

ANT-DS-ODH24-13 0115

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.