

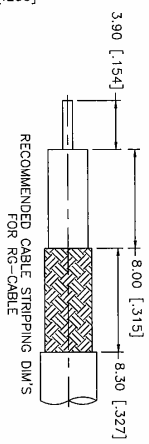



REV	DATE	DESCRIPTION
NC	07/23/04	INITIAL RELEASE

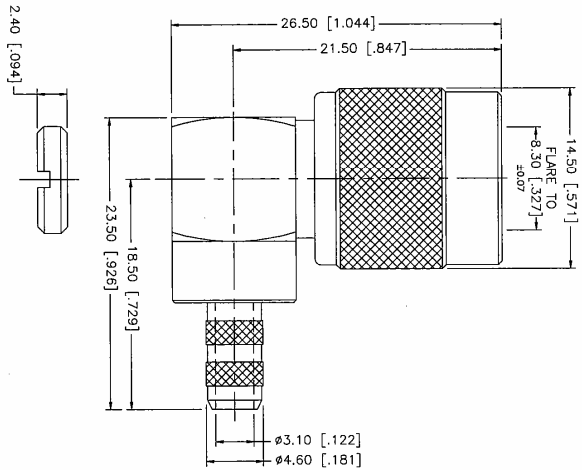

NOTES:
 1. CRIMPED FERRULE HEX SIZE :213*
 2. SOLDER CENTER CONTACT.

RECOMMENDED CABLE STRIPPING DIM'S
 FOR 6 GHz PERFORMANCE CABLE WITH FOLD BRAID.
 ELECTRICAL:
 A) IMPEDANCE: 50ohms
 B) FREQUENCY RANGE: DC-6 GHz
 C) VSWR (RETURN LOSS): 1.4 (13.5dB), MAX.
 D) DIELECTRIC WITHSTANDING VOLTAGE:
 1500 VRMS, MIN.

QTY	FINISH	MATERIAL	DESCRIPTION
1	NICKEL	BRASS	BODY
1	NATURAL	TEFLON	INSULATOR
1	GOLD	PHOS. BRONZE	CONTACT PIN
1	NICKEL	COPPER	FERRULE
1	NICKEL	BRASS	NUT

APPROVALS	DATE	APP. NO.	REV.	SCALE
DRWN: G.R.S.	07/23/04	122140RP DWG	NC	NA

Amphenol Connex

TNC REVERSE POLARITY R/A CRIMP PLUG
 (FOR RG-58/U, 58C/U CABLE)

122140RP

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS (DIMENSIONS IN INCHES ARE INDICATED BY A " " FOLLOWING THE DIMENSION). TOLERANCES FOR MILLIMETERS ARE:
 0.3 - 3mm ± 0.20mm
 3 - 120mm ± 0.30mm
 UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
 .315 - 1.180 ± 0.0075
 1.180 - 4.724 ± 0.020
 DO NOT SCALE DRAWING