


M20 Connectors



Male Horizontal Surface Mount Single Row

- Pin headers can be cut into smaller sizes.
- Contact technical@harwin.com for Tape and Reel options.
- Suitable for use with female connectors and jumper sockets shown on previous pages.
- Horizontal orientation for 90°C board-to-board applications.

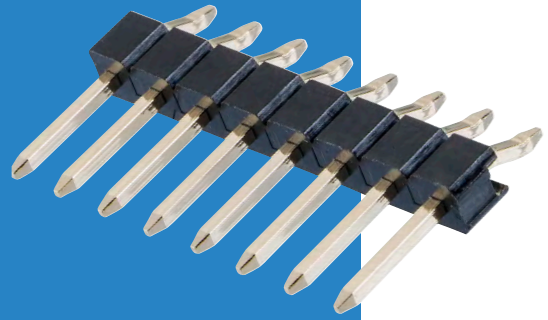

2.54mm (.100") PITCH

STANDARD PROFILE

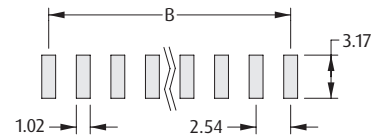
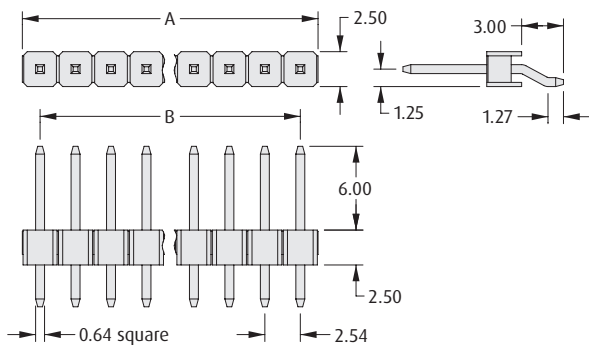


Recommended PC Board Pattern

CALCULATION

A	2.54 x No. of contacts per row
B	2.54 x (No. of contacts per row - 1)

HIGH PROFILE

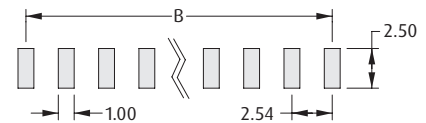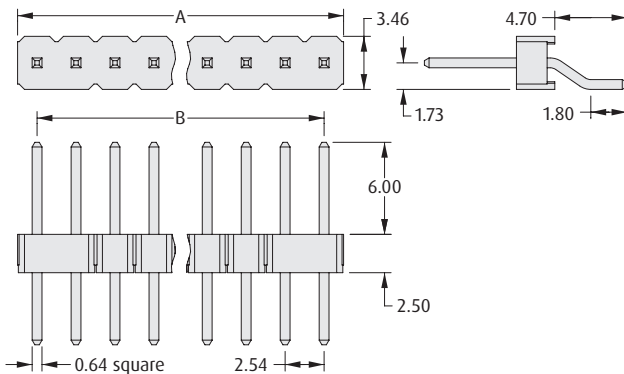

Recommended PC Board Pattern

HOW TO ORDER

M20 - 8XX XX 05 X

SERIES CODE

TYPE

889	Standard Profile
890	High Profile

NO. OF CONTACTS PER ROW

02 to 06, 08, 10	Standard Profile
03 to 25	High Profile

PACKAGING

Blank	Loose
R	Tape & Reeled (Standard Profile)

FINISH

05	Gold (High Profile)
45	Gold (Standard Profile)

All dimensions in mm.